Magnetism and Ferromagnetic Loss in Ni- based Substrates for Coated Conductors

J. R. Thompson
University of Tennessee, Knoxville and Oak Ridge National Laboratory

Anota O. Ijaduola
University of Tennessee, Knoxville

A. Goyal, D. K. Christen, and D. M. Kroeger
Oak Ridge National Laboratory

INVITED PRESENTATION

AFOSR HTS Coated Conductor Review
St. Petersburg, Florida
January 23, 2003

"The submitted manuscript has been authored by a contractor of the U.S. Government under contract No. DE-AC05-00OR22725. Accordingly, the U.S. Government retains a nonexclusive, royalty-free license to publish or reproduce the published form of this contribution, or allow others to do so, for U.S. Government purposes."

prepared by
SOLID STATE DIVISION
OAK RIDGE NATIONAL LABORATORY
Managed by
UT- BATTELLE, LLC
under
Contract No. DE-AC05-00OR22725
with the
U.S. DEPARTMENT OF ENERGY
Oak Ridge, Tennessee

May, 03

Magnetism and Ferromagnetic Loss in Ni-based Substrates for Coated Conductors

J. R. Thompson
University of Tennessee, Knoxville[A] and Oak Ridge National Lab[B]
Anota O. Ijaduola
UTK
A. Goyal, D.K. Christen, and D. M. Kroeger
Oak Ridge National Laboratory

Objectives

- Determine basic ferromagnetic properties of Ni-based alloys for substrates
- Establish level of FM (hysteretic) loss *W*, for potential ac applications
- Examine effect of bending deformation; ac frequency; dc bias field on loss

Materials

- Biaxially textured $Ni_{1-x}W_x$ alloys with x = 0, 3, 5, and 9 at %.
- Materials from AmSC, Oxford, ORNL

[A] Work supported by AFOSR under grant F49620-02-1-0182
[B] Research sponsored by USDOE, Office of EERE, under contract DE-AC05-00OR22725
AFOSR HTS Coated Conductor Review, St. Petersburg, FL 22-24 Jan 2003

Analogies between Superconductors and Ferromagnets

Superconductor	**Ferromagnet**
Intrinsic properties	
Transition temperature T_c	Curie temperature T_c
Condensation energy,	Condensation energy,
Thermodynamic critical field	Spontaneous magnetization
...	…
Extrinsic properties	
Vortex pinning	Domain wall pinning
Critical current density	Coercive field, coercivity

Studies were conducted in a SQUID magnetometer, with dc and ac fields applied || plane of Ni-W foil samples, to minimize demagnetizing effects.

Determination of M_{sat} and Curie T_c : $M \propto (T_c - T)^{1/3}$

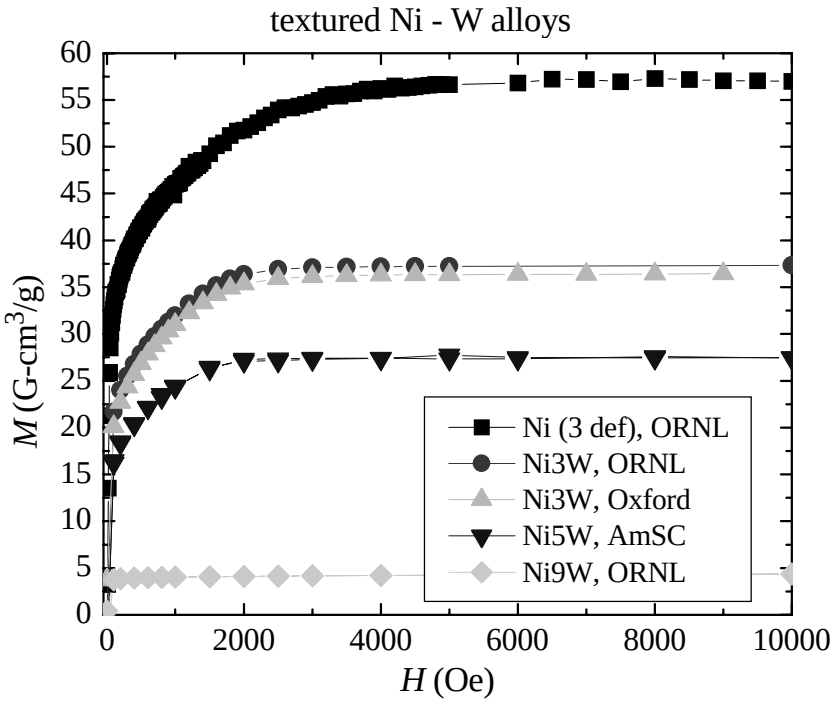

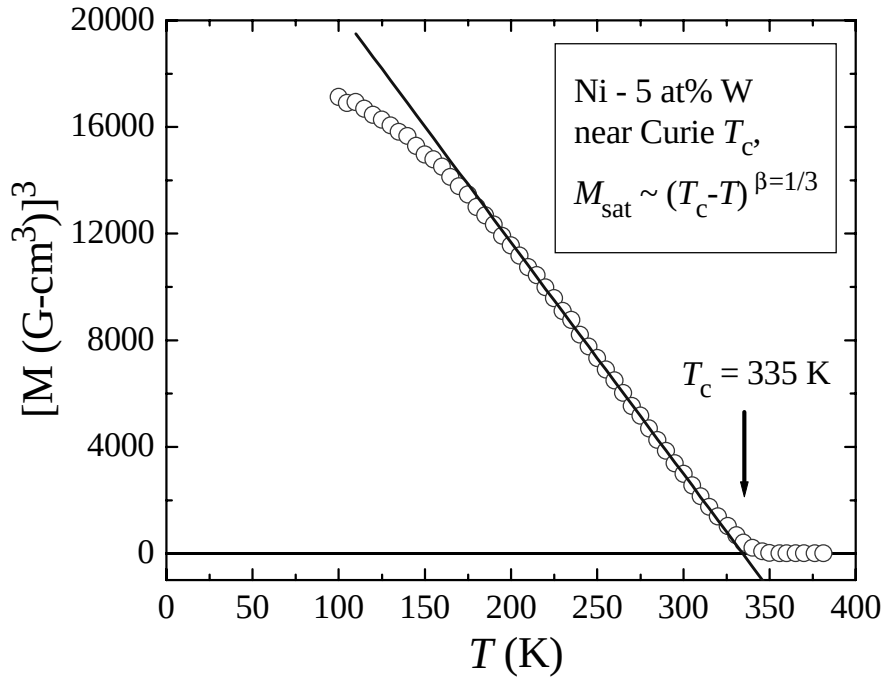

NiW SummaryandTables

For Ni, magnetocrystalline anisotropy gives [111] easy axis;
Biaxial texturing and sample geometry has field $H \parallel [100]$
$\Rightarrow$ rounding of magnetization curves $M(H)$.

Dependence of Curie T_c and M_{sat} on Cr-content x

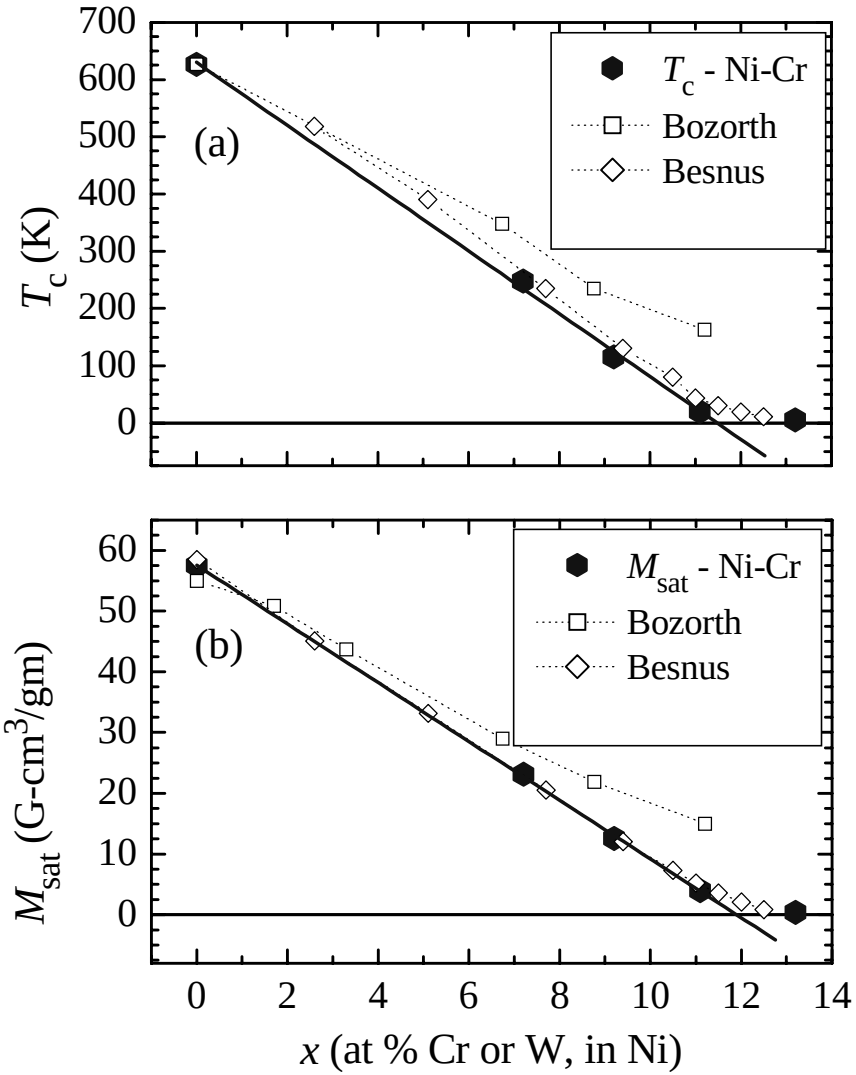

C data NiCr

- Our previous work - Ni-Cr (Physica C **370**, 169 (2002)
- *Ferromagnetism*, R. P. Bozorth (IEEE Press, 1978)
- Besnus, Gottehrer, and Munshy, Phys. Stat. Sol. B **49**, 597 (1972).

Dependence of Curie T_c and M_{sat} on W-content x

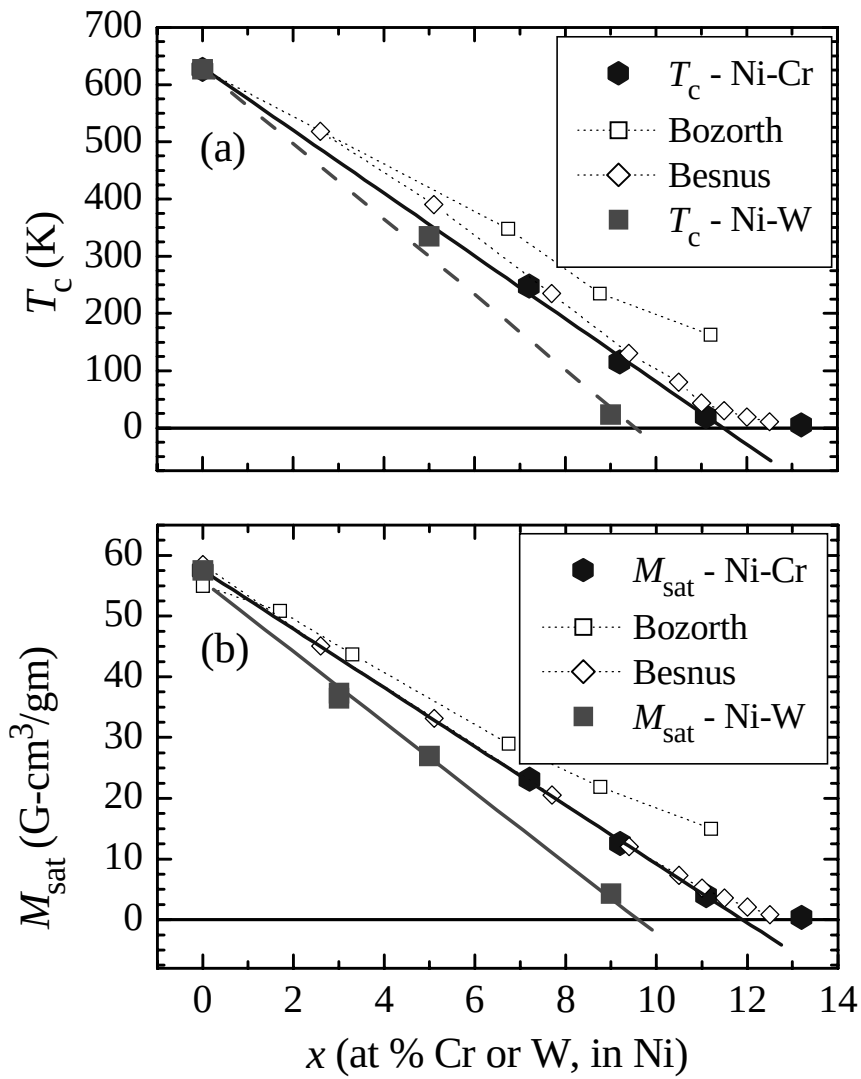

C data NiCr

- Our previous work - Ni-Cr (Physica C **370**, 169 (2002)
- *Ferromagnetism*, R. P. Bozorth (IEEE Press, 1978)
- Besnus, Gottehrer, and Munshy, Phys. Stat. Sol. B **49**, 597 (1972).

➡ **- Present work on Ni-W**

Obtain FM loss from $M(H)$ loop area

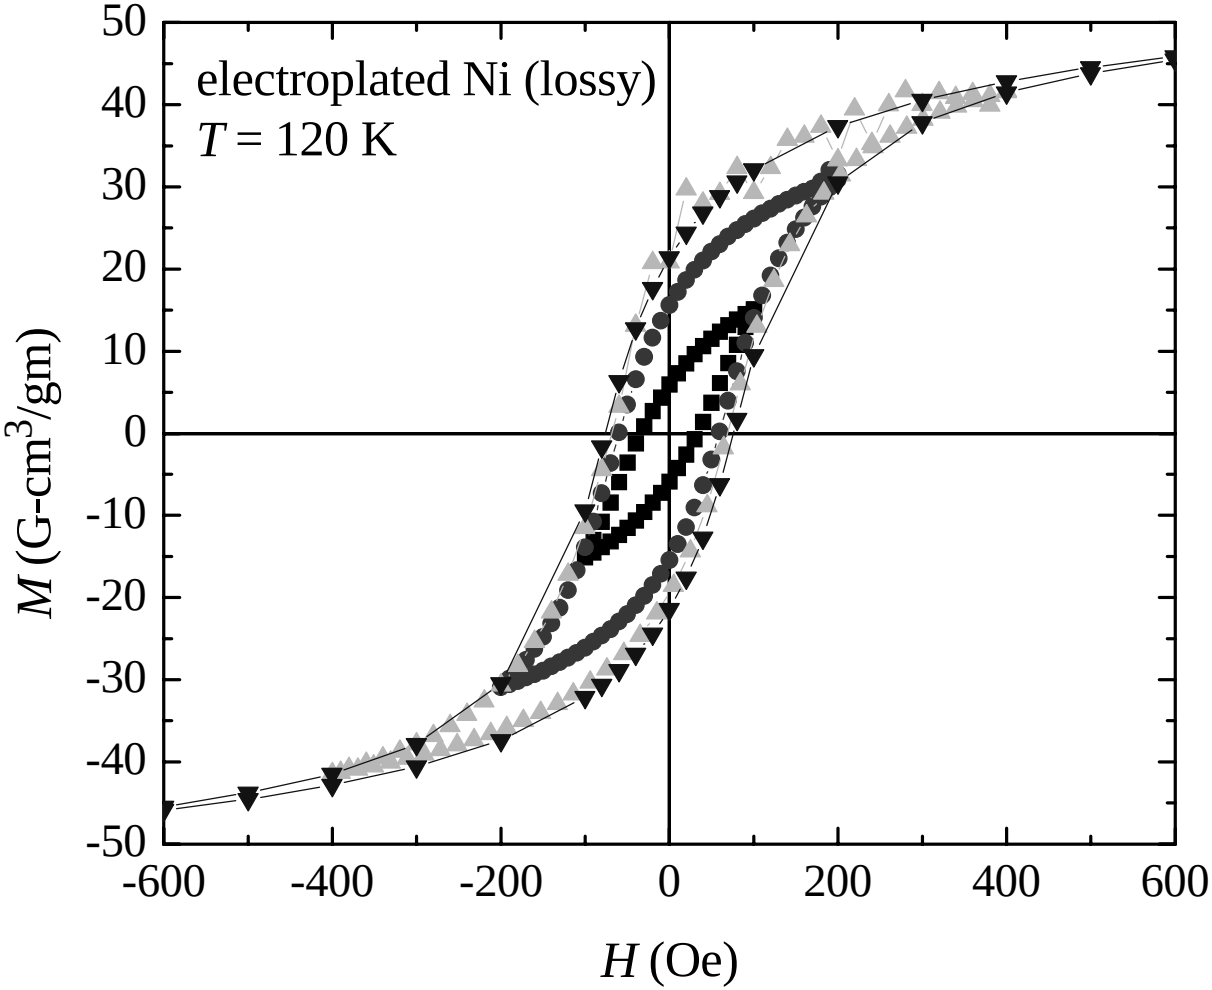

FM loss $W = \int M \mathrm{d}H$ = loop area, which increases with H_{max}

FM loss W vs H_{max} at 50, 77 K, with bending deformation

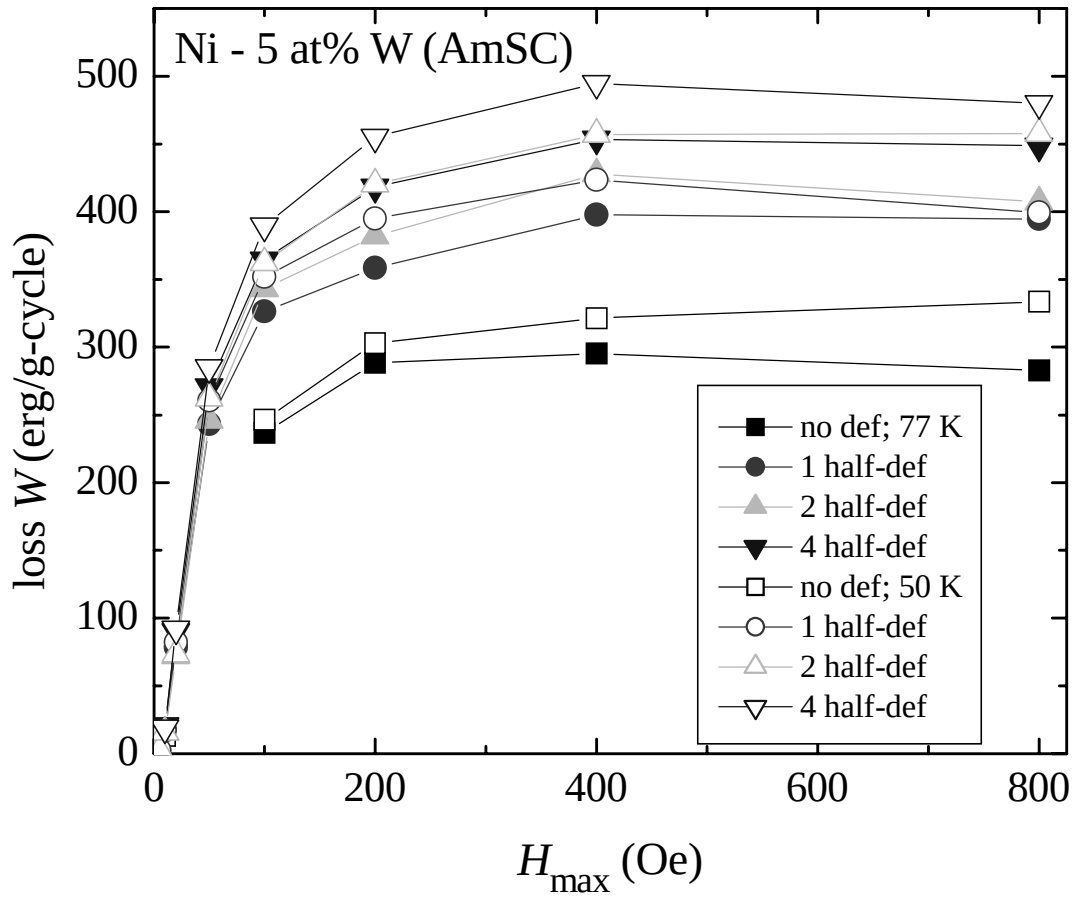

- Loss W first increases ~ linearly with $H_{max,}$ then saturates;
- loss increases with # cycles of deformation (0.4% bending strain);
- loss increases somewhat as T decreases.

FM loss *W* vs damage due to # of bending deformations

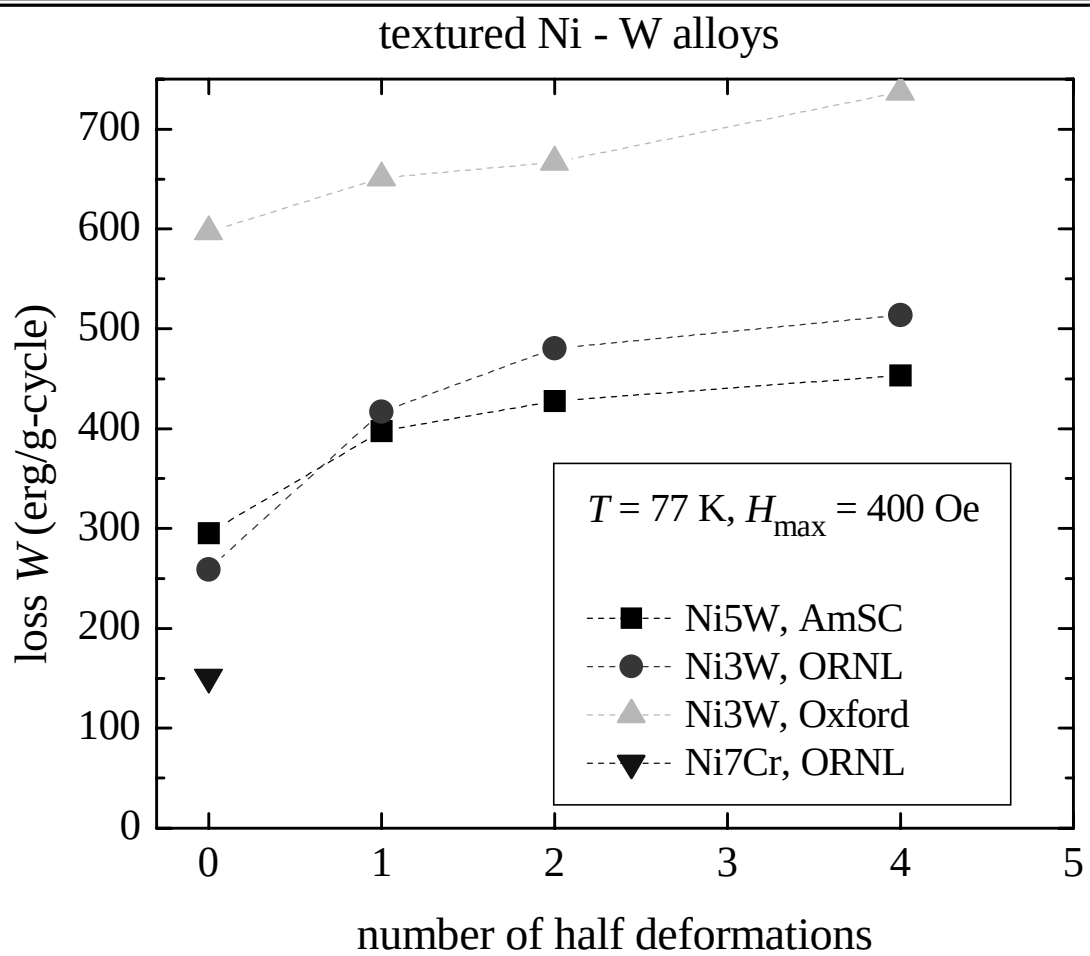

one half-deformation: | ⇒ (⇒ | ; second half-deformation | ⇒) ⇒ |

Illustration: relative losses for YBCO / Ni-5 W

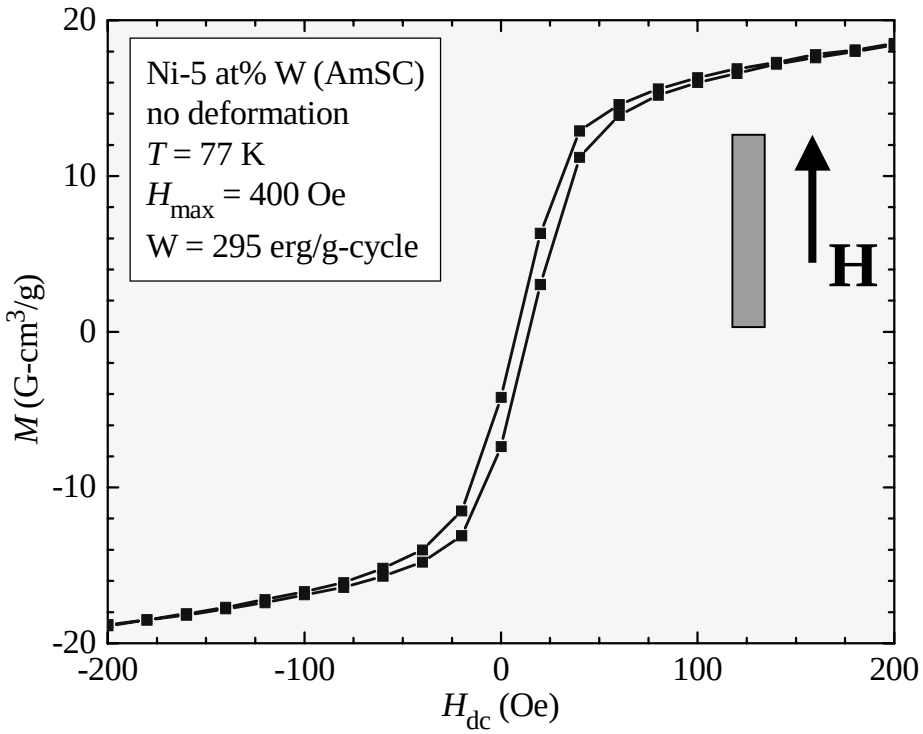

♦ HTSC and FM power losses scale very differently with current I_0/I_c

♦ HTSC loss can be reduced (ideally) by factor of $1/N$ by subdividing tape into N (non-interacting) conductors.

Loss in HTSC (8 mm × 2.5 μm):
for $J_c = 1\times10^6$ A/cm^2, $I_c = 200$ A

If $I_0 = I_c$, Norris gives ac loss/m of
$L_{c,\,max} = (\mu_0/2\pi)\, I_c^2 = 8$ mJ/m-cycle
⇔ power = **2400 mW/(kA-m)**

For $I_0 = I_c/2 = 100$ A,
$L_c \approx (1/17)\, L_{c,\,max} = 0.46$ mJ/m-cycle
⇔ power loss = **270 mW/(kA-m)**

==========

Substrate Loss (8 mm × 50 μm):
0.4 cm^3 of alloy/m × 0.27 mJ/cm^3 ⇒

$L_{c,\,FM} = 0.10$ mJ/m-cycle (Ni-5%W)
(and 0.7mJ/m-cycle for pure Ni)
⇔ power loss = **64 mW/(kA-m)**
(and 430 mW/kA-m for pure Ni)

ac loss *W* decreases when dc bias field saturates Ni-alloy

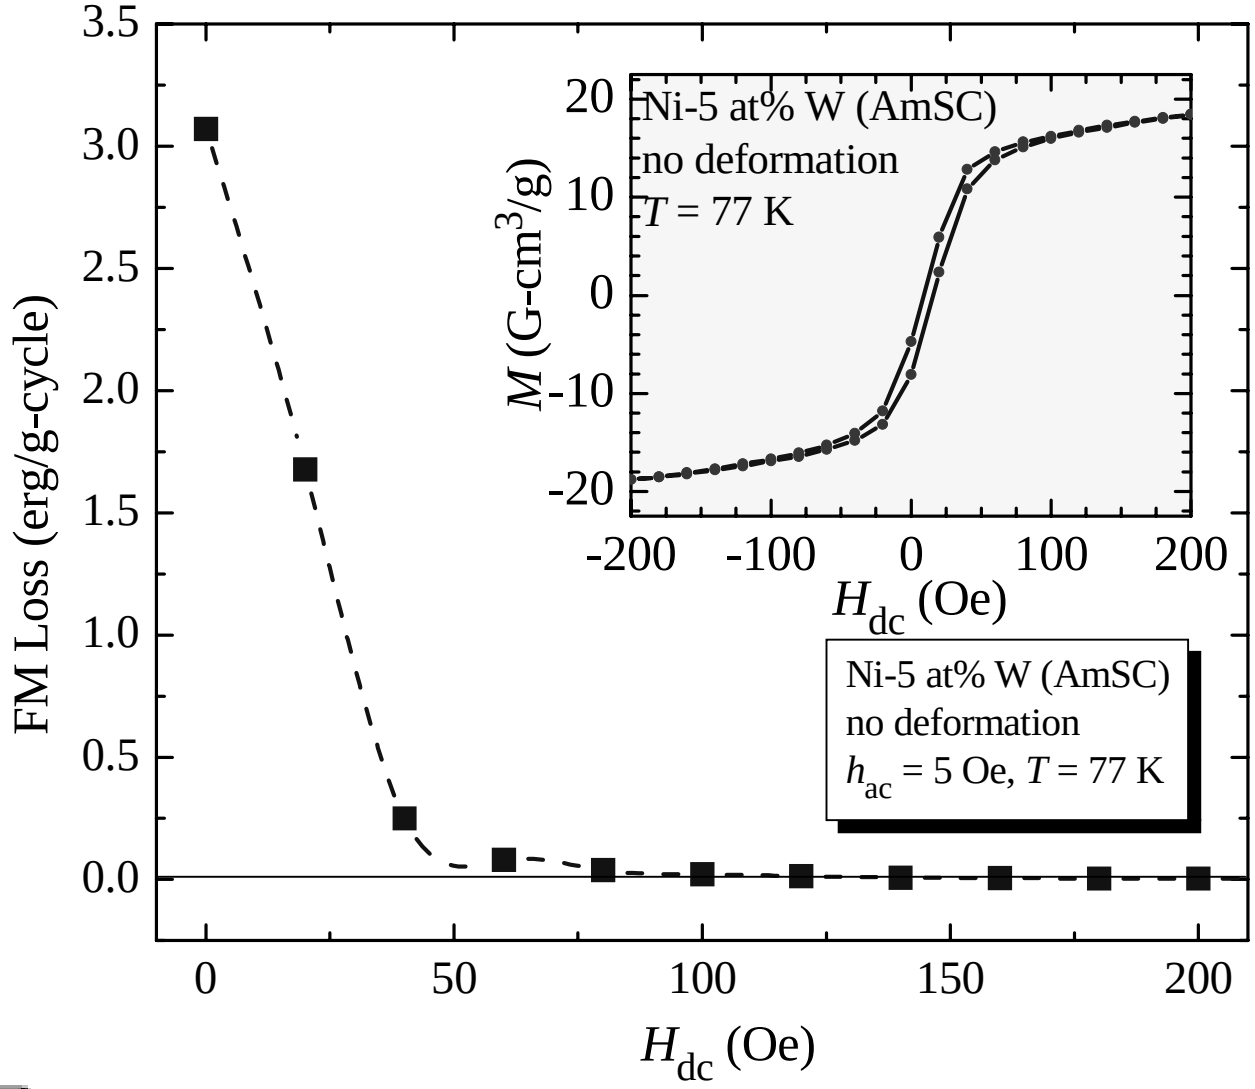

ac loss is independent of ac *f* to 100's of Hz

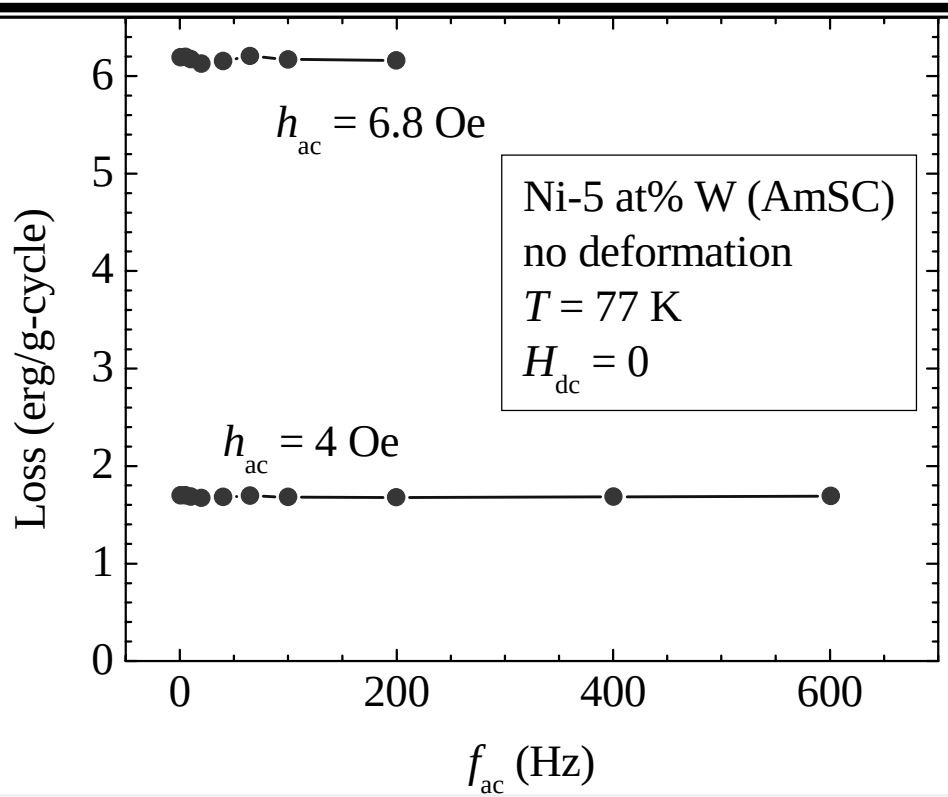

Eddy current losses minimal; skin depth $\delta \approx (2\rho/\mu\omega)^{1/2} \approx 1.4$ mm for $\rho = 10\mu\Omega$–cm, $\omega = 1000$ rad/s, $\mu/\mu_0 \approx 40$.

Also, loss W was ~ unaffected by temperature cycling;
8 cycles of 300 - 77 K increased W from 295 $\Rightarrow$ 302 erg/g (for undeformed Ni-5 at.% W at 77 K, with H_{max} = 400 Oe)

Other Ni alloys have minimal/no FM & biaxial texture

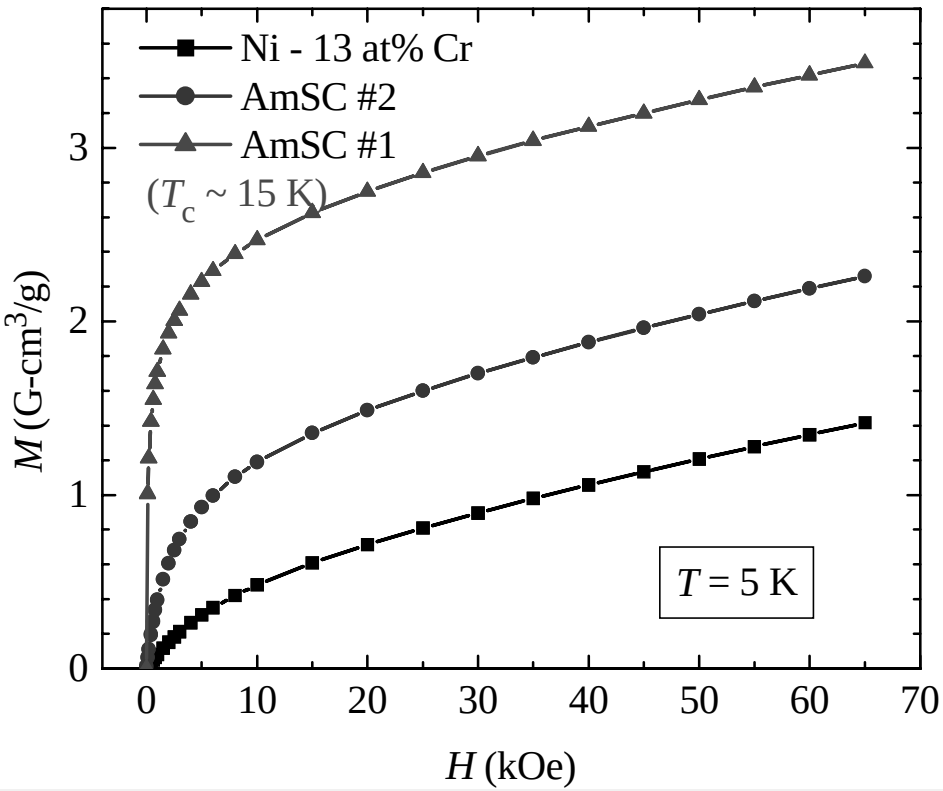

Magnetization *M* is much smaller than for more concentrated alloys.

For these Ni-based alloys, the FM vanishes at temperatures of potential applications.

Conclusions

- $Ni_{1-x}W_x$ alloys with x = 0, 3, 5, and 9 at % W: M_{sat} (and ~T_c) decrease linearly with x; critical concentration $x_c \approx 9._5$ at. % W.

- FM hysteretic loss W ~ 300-600 erg/g-cycle in biaxially textured alloys with tungsten contents of 5-3 at. %

- Loss W increases at first ~ linearly with field excursion H_{max}, then saturates at larger H_{max}

- Loss W increases with bending deformation (0.4 % bend strain) ⇔ pinning of domain walls by induced defects.

- FM loss independent of ac frequency; stable with T-cycles; decreases drastically when alloy is saturated by dc bias field.