

Ship Motion Compensation for Force Control Systems (SMCFCS)



The Next Generation of Ship Motion Compensation

Sponsor: Office of Naval Research

Contact Information:


Dr. Lonnie Love
Phone: (865)576-4630
lovelj@ornl.gov
Oak Ridge National Laboratory
P.O. Box 2008
Oak Ridge, TN 37831-6305

Objective

Develop a methodology that will enable Human Strength Amplification previously demonstrated by ORNL to be used aboard U.S. Naval vessels while at sea.

Challenge – Implement Force Control of Variable Payload System on a Moving Platform

- Ship is in constant motion resulting in variable inertial disturbance forces that act on the payload.
- Disturbance forces are not at a single frequency.
- Disturbance forces are potentially very large.
- Magnitude and frequency of disturbance forces are in the same range as the command input.

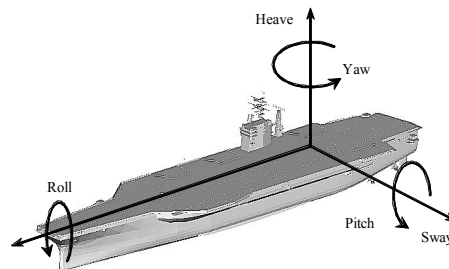


Disturbance forces generated by ship motion interfere with force control applications. Example: 600-lb load in sea state 5. Large ship; $f_{ah}= 420$ lb, $f_{ar}= 937$ lb (~23% load). Small ship; $f_{ah}= 1020$ lb, $f_{ar}= 1533$ lb (~43% load).

Approach

- Waves are not periodic → Repetitive Learning Control (RLC) will not work.
- An approach similar to noise cancellation in headsets does work.
 - Secondary force/torque sensor measures disturbance forces.
 - Adaptive filter correlates payload mass to reference sensor mass.
 - Disturbance force is subtracted from feedback that the operator senses.

Results

- Hardware testing on ORNL’s Ship Motion Simulation Platform confirmed modeling and simulation results showing a ten-fold reduction in disturbance loading and ten-fold improvement in tracking.
- Operator retains control of the payload:
 - Can feel contact with the environment, but
 - Does not feel the ship induced disturbance forces.
- Improved safety and efficiency: the operator can concentrate on the task and not on overcoming disturbances due to ship motion.

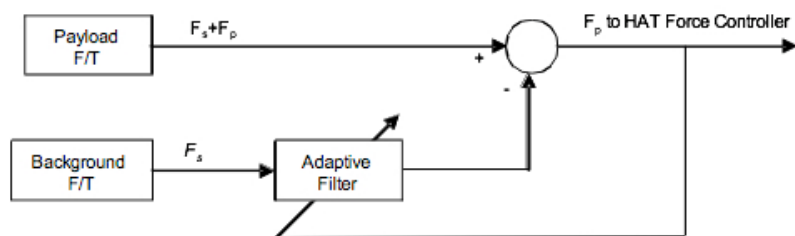

Sea state spectrum is highly variable.

