

Conservation
—
Division of Buildings
and
Community Systems

An Efficiency Evaluation and Consumer Economic Analysis of Domestic Water Heaters

G. G. Slaughter
D. E. Spann



OAK RIDGE NATIONAL LABORATORY
OPERATED BY UNION CARBIDE CORPORATION · FOR THE DEPARTMENT OF ENERGY

ORNL/CON-5

Contract No. W-7405-eng-26

AN EFFICIENCY EVALUATION AND CONSUMER ECONOMIC ANALYSIS
OF DOMESTIC WATER HEATERS

G. G. Slaughter
Physics Division

and

D. E. Spann
Energy Division

Department of Energy
Division of Buildings and Community Systems

Date Published: September 1978

OAK RIDGE NATIONAL LABORATORY
Oak Ridge, Tennessee 37830
operated by
UNION CARBIDE CORPORATION
for the
DEPARTMENT OF ENERGY

CONTENTS

ABSTRACT	1
1. INTRODUCTION	1
2. CHARACTERIZATION OF STORAGE-TYPE WATER HEATERS	3
2.1 Gas-Fired Water Heaters	5
2.1.1 Description	5
2.1.2 Characterization of gas-fired water heaters	7
2.1.3 Further modifications to improve efficiency and energy conservation	17
2.1.4 Power burner tests	20
2.2 Electric Water Heaters	21
2.2.1 Description	21
2.2.2 Characterization of electric water heaters	23
2.3 Efficiency Evaluation of Water Heaters: Appliance Efficiency and Service Efficiency	24
3. ENERGY CONSERVATION PRACTICES IN THE HOME	35
4. ECONOMIC ANALYSIS OF STORAGE-TYPE WATER HEATERS	39
4.1 Gas-Fired Water Heaters	39
4.2 Electric Water Heaters	41
4.3 Indirect Energy Usage of Storage-Type Water Heaters	44
5. SUMMARY AND CONCLUSIONS	47
REFERENCES	49

LIST OF TABLES

1	Main burner efficiencies for gas-fired water heaters	4
2	Airflow rates and excess-air ratios for a gas-fired water heater	8
3	Heat loss rates and gas consumption during standby of gas-fired water heaters	14
4	Jacket heat loss rate for a 50-gal gas-fired water heater	19
5	Pilot heat-transfer efficiency for gas-fired water heater with stack restricted by 5/16-in. orifice	19
6	Standby heat losses of electric water heaters	26
7	Full-load efficiency of 30- and 66-gal electric water heaters (55°F input temperature)	27
8	Operating costs and savings with pilot off and flue open or blocked during standby for a gas-fired water heater	40
9	Operating costs of as-received and modified gas-fired water heater while delivering 75 gal/day of 150°F hot water	42
10	Cost of standby heat losses for electric water heater	43
11	Cost per month of continuous air conditioning to remove water heater jacket loss from conditioned space	46

LIST OF FIGURES

1	Gas-fired water heater	6
2	Gas-fired water heater: input, flue loss (pilot only on), flue loss (pilot off), available and flue-to-water-tank heat rates, and pilot heat-exchange efficiency vs water tank temperature	10
3	Gas-fired water heater: jacket, flue-to-water-tank, and net tank loss heat rates vs water tank temperature	11
4	Gas-fired water heater: total heat loss rates vs water tank temperature for three operational configurations	13
5	Gas-fired water heater: service efficiency of main burner vs water tank temperature	16
6	Jacket heat loss rates for gas-fired water heater, as received and with retrofit insulation	18
7	Fast-recovery-type 66-gal electric water heater	22
8	Standby heat loss rates for electric water heaters vs water temperature with typical data points shown (ambient temperature = 70°F)	25
9	Appliance efficiencies of electric water heaters	31
10	Appliance efficiency of 50-gal gas-fired water heater	33

AN EFFICIENCY EVALUATION AND CONSUMER ECONOMIC ANALYSIS
OF DOMESTIC WATER HEATERS

G. G. Slaughter

D. E. Spann

ABSTRACT

The performances of one gas-fired and two electric storage-type water heaters were characterized experimentally as a function of water tank temperature. For both types of heaters the application of additional insulation was highly cost effective. For the gas-fired water heater the pilot burner flue losses [92% at a water temperature of 150°F (65.6°C)] were reduced in a cost-effective manner by either pilot orifice restriction or flue blocking with electric ignition. In addition, an electrically powered burner, with flue modifications, increased the heat-exchange efficiency of the main burner from 72% to 85% at 160°F (71.1°C). The heat loss rate per unit of bare tank area is a useful number in assessing the energy conservation potential of a water heater.

1. INTRODUCTION

The United States of America has had the reputation among world travelers of a nation in which hot water is ubiquitously available in almost unlimited quantities. Regardless of the truth or falsity of this impression, the energy consumption of gas and electric water heaters is significant, in terms of both fuel and equivalent dollars. In 1975, electric water heaters are estimated¹ to have directly consumed 90×10^9 kWhr (0.3×10^{15} Btu) at a total cost of \$3 billion (at 3.45 ¢/kWhr). At an estimated generation and distribution efficiency of 30%, this usage accounted for 1.0×10^{15} Btu of energy consumption at the power station. Gas-fired water heaters are estimated to have consumed 1.0×10^{15} Btu at a total cost of \$1.9 billion (at 2.0 \$/MBtu). The total energy cost for gas and electric water heating of \$5 billion, and primary consumption of 2×10^{15} Btu, implies that large absolute savings

in dollars and fuel are potentially possible with conservative use and improved water heaters. These large savings will be realized by homeowners if energy-conservative modifications or new equipment can be made economically advantageous. The major purpose of this study is to determine how this can be done.

2. CHARACTERIZATION OF STORAGE-TYPE WATER HEATERS

Water heaters are installed in a wide variety of spaces, such as heated and unheated indoor spaces, garages, crawl spaces, and outdoor areas in mild climates. The use pattern of water heaters also varies widely in regard to throughput, frequency of hot water draws, and thermostat settings. These varying use patterns dictate variations in appropriate heater size. The most reasonable approach to obtaining performance data for water heaters of varying sizes under such a wide range of conditions is to measure, as a function of water temperature, the intrinsic properties of water heaters in the laboratory and to use these data to calculate the performance of water heaters under other conditions.

Some of the heat rates associated with the operation of water heaters vary drastically with water tank temperature. It is important, therefore, to make performance measurements in the laboratory at realistic operating temperatures. The actual average operating temperature of a water heater will depend upon the thermostat setting and use pattern, and the amount of cold water which is heated. In practice, this average temperature is close enough to the thermostat temperature setting that the term "hot water heater" is more realistic than redundant. Most of the time the water heater is heating a mixture of hot water and incoming cold water. This mixture has a temperature not very much below the thermostat setting. For example, the 50-gal gas-fired water heater is capable of heating 42 gal/hr from 55 to 150°F (12.8 to 65.6°C) (see Table 1). This gas water heater can heat 75 gal of water per day from 55 to 150°F (12.8 to 65.6°C) for the average family of four and supply most of the standby heat loss rate by only 2.22 hours of main burner operation per day. The remaining 91% of the time the water tank is at or near the thermostat temperature setting. It is clearly inappropriate to represent measurements taken at inlet water temperature, or the average of inlet water temperature and 150°F (65.6°C), as being applicable to this water heater operating at a 150°F (65.6°C) thermostat setting.

Table 1. Main burner efficiencies for gas-fired water heaters^a

Water temperature (°F)	Main burner efficiency (%)	Recovery rate (gal/hr)
110	74	74.8
130	73	54.3
150	71	42.0

$$^a \text{Efficiency} = \frac{\text{input heat rate} - \text{total heat loss rate}}{\text{input heat rate}}$$

The 66-gal electric water heater tested has a lower recovery rate, but it is still in the standby mode of operation 82% of the time under the conditions specified.

Considerable effort was expended to measure heat loss rates directly, rather than inferring them from the difference between input and output heat rates. For example, the jacket heat loss rates for the heaters were measured for all temperatures of interest by allowing the heaters to heat the water to the maximum thermostat setting and subsequently measuring the time rate of temperature decay of the tank, with the heat source off and outlet valve closed. The flue of the gas-fired water heater was blocked with an insulating material during this measurement to prevent flue loss. The gas-fired water heater pilot burner flue heat loss rate was determined by measuring the flow rate and temperature of the flue gas for all tank temperatures of interest. In addition, all of the heat rates for the gas-fired water heater were determined for all temperatures of interest by measuring the rate of temperature change of the tank under the proper conditions. All of these techniques yield heat rates and efficiencies as a function of water tank temperature. Some of these measurements were repeated using the classical technique of measuring the flow rate and temperature rise of water flowing through the heater. The results of the two different techniques agreed to within experimental error. Unfortunately, the classical techniques give the heat flows and efficiencies at unrealistically low water tank temperatures.

The gas-fired water heater is considerably more complex thermodynamically than the electric water heater, and it spends a larger fraction of the time in the standby mode with only the pilot burner on. An investigation of the heat flow rates associated with pilot burner operation will effectively demonstrate all of the thermodynamic principles involved, with analysis of main burner operation and electric water heater operation forming a simpler subset.

2.1 Gas-Fired Water Heaters

2.1.1 Description

The gas-fired water heater tested in the laboratory will be described since it is typical of the current state of commercial offerings (Fig. 1). The cylindrical water tank is 47.5 in. (120.6 cm) high and 18 in. (45.7 cm) in diameter, and has a central flue that is 3.75 in. (9.52 cm) in diameter. The nominal capacity is 50 gal (0.189 m³). Between the tank and the sheet metal outer jacket is 1 in. (2.54 cm) of glass fiber insulation. The pilot and main burners are at the bottom of the flue. They are controlled by a valve which has the positions "Off," "Pilot Only," and "On." A thermostat opens the main burner valve when the water temperature drops below the set point. A thermocouple heated by the pilot burner operates a solenoid valve, which shuts off the gas supply if the pilot burner goes out. The pilot burner consumes natural gas (in this case), which has a heat of combustion of 1030 Btu/ft³ (3.84×10^7 J/m³), at a rate of 0.9 ft³/hr (2.55×10^{-2} m³/hr), for a pilot-only heat input rate of 924 Btu/hr (271 W). The pilot and main burners consume 44.6 ft³/hr (1.26 m³/hr), producing a heat input rate of 45,950 Btu/hr (13.5 kW). A baffle in the flue induces turbulence in the hot flue gases and promotes heat exchange with the tank. A draft hood or draft diverter at the top of the heater decouples the flue from the stack or chimney, so that gusts of wind will not extinguish the pilot. For convenience, the water piping connections are at the top of the heater. The outlet for the hot water is at the top of the tank, whereas the inlet pipe is carried to the bottom of the tank with a dip tube

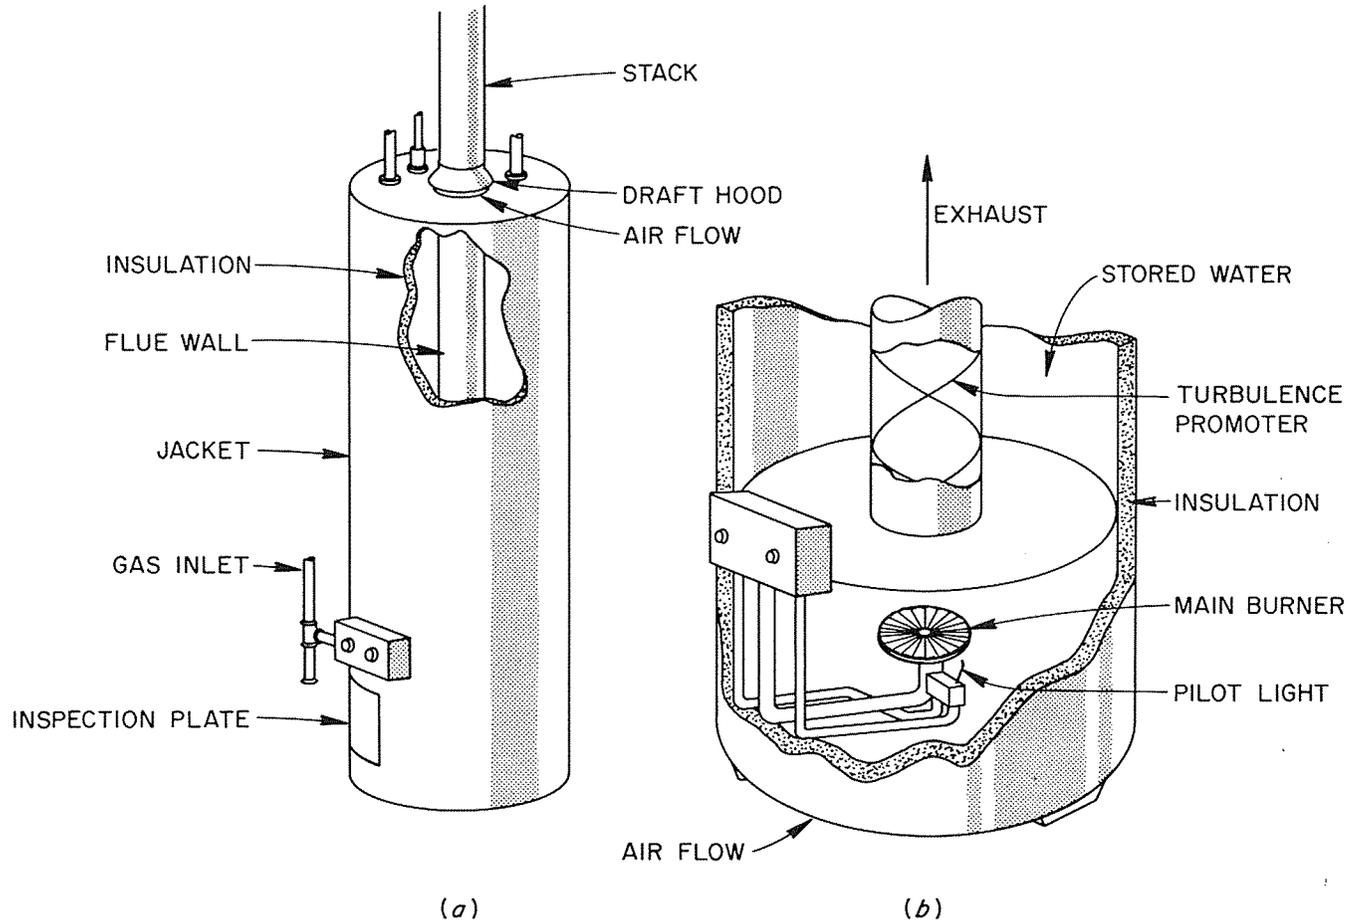


Fig. 1. Gas-fired water heater.

fitted with a diffuser, which discharges the cold water with minimum vertical velocity. This arrangement promotes stratification between the less dense hot water exiting at the top and the more dense cold water entering at the bottom. In practice, the exiting water remains hot until it is almost completely displaced by cold water. A temperature and pressure safety valve at the top of the heater and a drain cock at the bottom complete the fittings.

A critical look at the design of the heater is in order. The flue and airflow orifices are sized for the main burner, which burns about 50 times more gas per hour than the pilot burner. Since there is no provision for reducing the size of the orifices for pilot-only operation, it is expected that the pilot burner will operate with considerable excess air. The open flue in the middle of the tank can be expected to be a large heat-loss mechanism, especially if the burners are off. If the water tank temperature is above the surrounding ambient temperature, a natural draft will be induced in the flue, and ambient air will flow into the bottom of the flue to replace the less dense hot air rising from the top. The velocity of the flow should increase with increasing temperature difference. The draft hood will permit the education of considerably more air from the installed space than the flow up the flue. With only 1 in. (2.54 cm) of glass fiber insulation, a substantial amount of heat will be lost through the jacket.

2.1.2 Characterization of gas-fired water heaters

The tank can interchange heat through two interfaces: the wall - jacket interface and the wall - flue interface. The heat loss rate through the tank-wall - jacket interface varies directly with the temperature difference between the tank wall and the ambient temperature. The tank can either gain or lose heat through the wall - flue interface, depending upon the relative temperature of the wall and the gases in the flue. A complete characterization of the heater would include the heat input rate, the jacket heat loss rate, the interchange heat rate between the flue and the tank wall, and the flue heat loss rate, over the range of temperatures of interest and for all possible combinations of burners.

The net heat rate of the water tank is the algebraic sum of the jacket - wall heat rate and the wall - flue heat rate.

The combustion airflow rates during pilot burner operation establish the constraints upon heat transfer to the water tank. These flows are shown in Table 2 for the following conditions: no burners on, pilot burner on, and both pilot and main burners on. The airflow rate with no burners on is the only one which varies markedly with tank temperature. The airflow with the pilot burner on is a surprisingly large fraction of the airflow with the main burner on. With the pilot burner operating at excess-air ratios (air supplied/air required) of about 50, the heat rate available to the tank falls rapidly as the tank temperature rises, because more of the heat is required merely to raise the temperature of the excess air. Even at room temperature, only 830 of the 924 Btu/hr (243 of 271 W) are available because 94 Btu/hr (27.5 W) are required to vaporize the water formed in the fuel combustion process. Under the highly diluted combustion conditions of the pilot burner operation, the heat of vaporization usually cannot be recovered. For example, the added water of combustion raised the dew point from the 43.5°F (6.4°C) of the incoming air to only 54.5°F (12.5°C).

Table 2. Airflow rates and excess-air ratios^a for a gas-fired water heater

	Water temperature, °F			
	92.5	114.5	134.5	152.5
Pilot and main burner off				
Airflow, ft ³ /hr	233.0	266.0	359.0	359.0
Pilot only on				
Airflow, ft ³ /hr	411.0	411.0	444.0	480.0
Excess-air ratio	49	49	53	58
Pilot and main burner on				
Airflow, ft ³ /hr		610.0	610.0	610.0
Excess-air ratio		1.47	1.47	1.47

^aExcess-air ratio = air supplied/air required for stoichiometric combustion.

The heat available to the tank from the 924 Btu/hr (271 W) input of the pilot burner is shown as the dashed curve in Fig. 2. As expected, it falls rapidly with tank temperature. The actual heat exchanged with the tank by the hot flue gases can be determined from the flue heat loss rate, which was measured as a function of water temperature. The difference between the input heat rate and the measured flue heat loss rate is the heat-exchange rate with the tank, and is shown in Fig. 2. The scale at the right of Fig. 2 indicates the heat-exchange efficiency of the pilot as a function of temperature. The heat-exchange efficiency can approach 90% if the tank is at room temperature, but falls to 40% at 110°F (43.3°C) and 8% at 150°F (65.6°C). It is apparent from the heat-exchange efficiency curve that, if the entering air is cold enough and the tank is hot enough, the "hot" flue gases will actually extract heat from the tank. This would occur if the ambient air were at 50°F (10°C) and the tank were above 137°F (58.3°C).

The flue heat loss rate with the flue open and the pilot burner off is also shown in Fig. 2. This rate has the same general shape as the "pilot on" flue heat loss rate curve, but is 340 to 460 Btu/hr (100 to 135 W) less, and the difference increases with increasing water temperature.

Measurement of the jacket heat loss rate is necessary to completely characterize the pilot burner operational mode. This heat loss rate is obtained by completely blocking the flue and measuring the rate of temperature decay of the tank. The heat loss rate through the connecting piping is small compared to the jacket heat loss rate, and will be considered part of the jacket loss. The result of this jacket and piping heat loss rate measurement is shown in Fig. 3. The curve is closely linear over the temperature range of interest, but is highly nonlinear near room temperature (not shown). The wall - flue heat-exchange rate is repeated from Fig. 2. The net heat rate of the water tank, which determines whether the water-tank temperature is increasing (positive heat rate) or decreasing (negative heat rate), is the algebraic sum of the heat rates at these two interfaces. This algebraic sum is also shown in Fig. 3. According to the calculations, at water temperatures above 112°F (44.4°C) the tank will decrease in temperature with only the

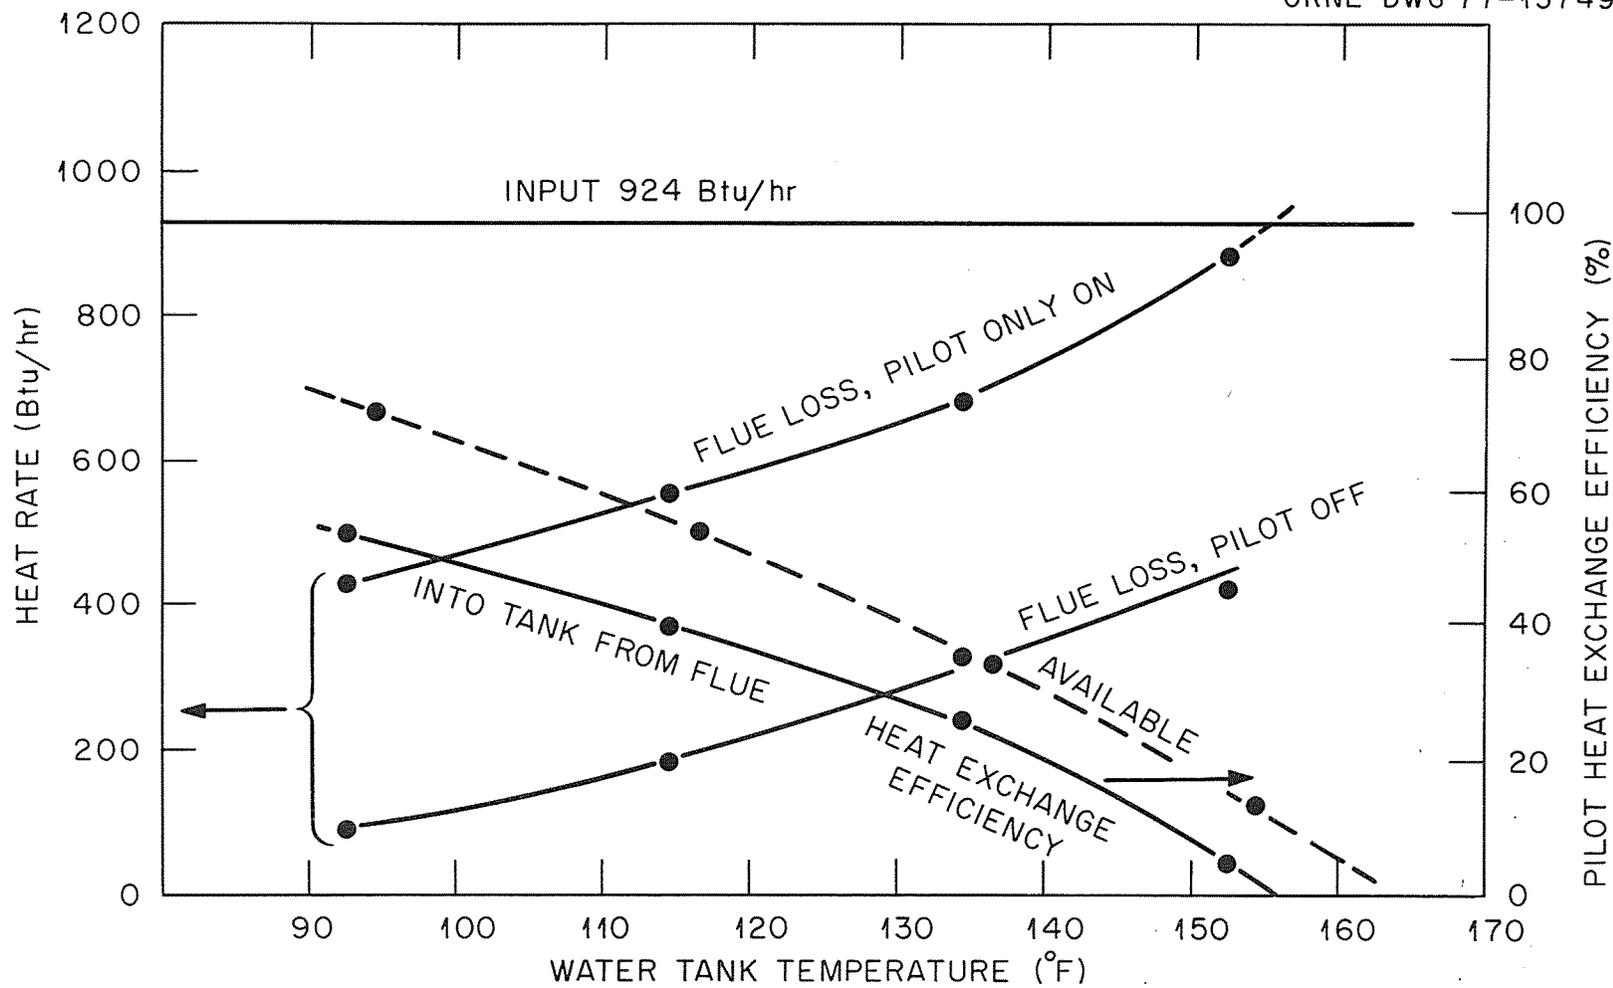


Fig. 2. Gas-fired water heater: input, flue loss (pilot only on), flue loss (pilot off), available and flue-to-water-tank heat rates, and pilot heat-exchange efficiency vs water tank temperature.

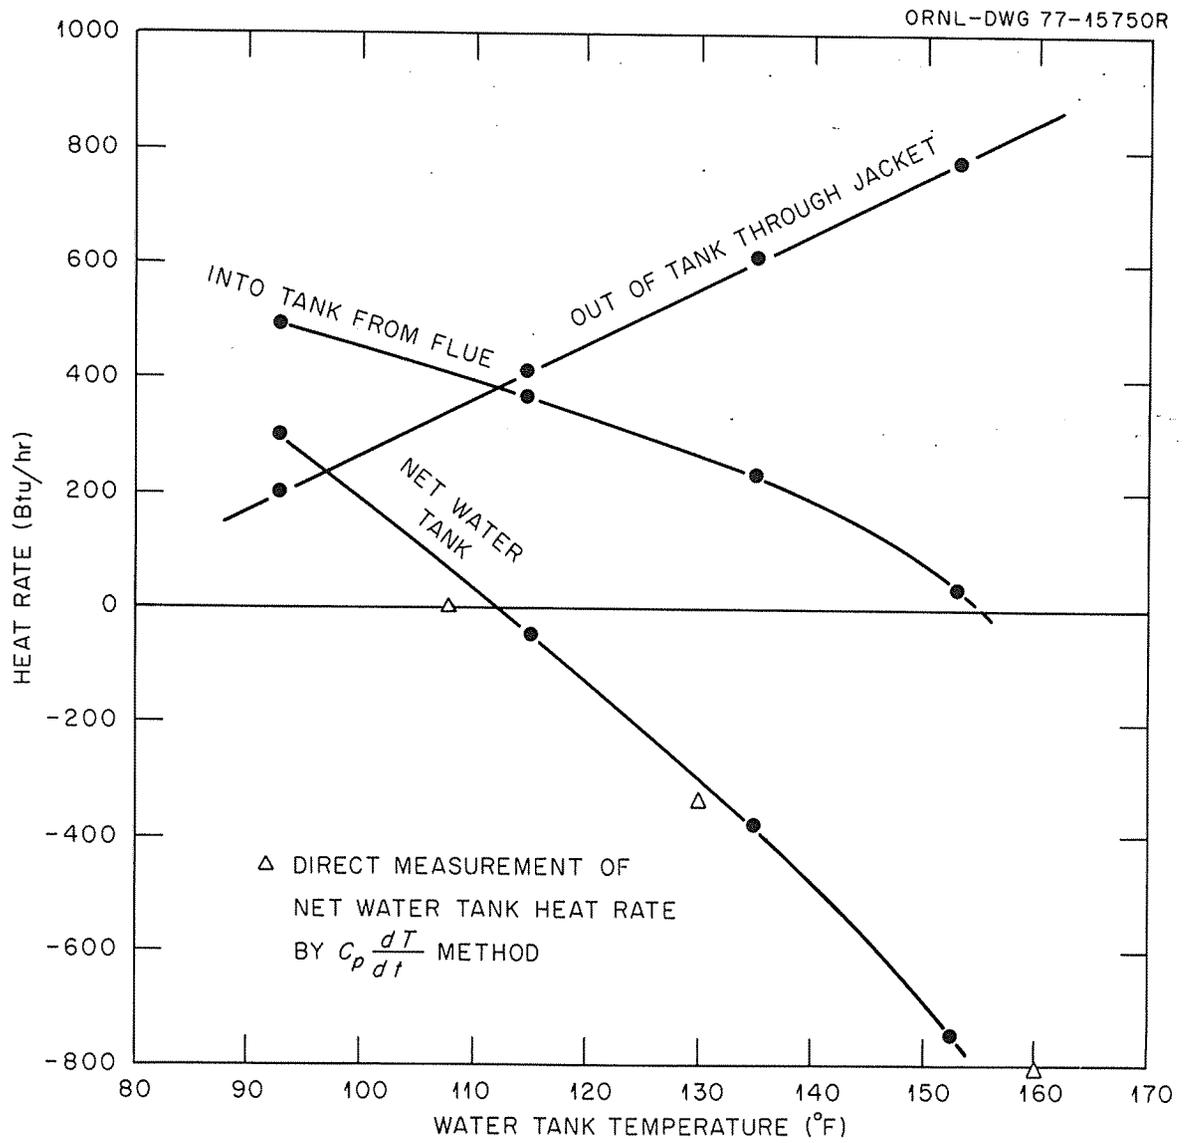


Fig. 3. Gas-fired water heater: jacket, flue-to-water-tank, and net tank loss heat rates vs water tank temperature.

pilot burner on. The net heat rate of the tank was measured by the temperature-decay-rate method for three temperatures, and the results are indicated by triangles in Fig. 3. The water temperature at which the jacket heat loss rate was exactly balanced by the heat input rate from the flue was 108°F (42.2°C), approached from above and below, compared with the calculated value of 112°F (44.4°C), but the difference in heat rates is only about 40 Btu/hr (11.7 W). The agreement of the two methods is considered adequate and within the bounds of experimental error.

The total standby heat loss rate is the sum of the jacket heat loss rate and the flue heat loss rate (Figs. 2 and 3). Figure 4 shows these sum curves for the situations of flue blocked, flue open and pilot off, and flue open and pilot on. The water heater can be thought of as operating in three different configurations corresponding to the three curves. For the flue-blocked curve, the heater would have an external electrical or mechanical means of opening the flue and an electrical means of igniting the main burner when necessary; the flue remains blocked during standby conditions. The heat loss rate during standby is that of just the jacket and is supplied by intermittent firings of the main burner operating at a heat-exchange efficiency of about 73%. For the flue-open and pilot-off curve, operation is the same except that the flue is open during standby conditions. The total heat loss rate is the sum of the jacket heat loss rate and the pilot-off flue heat loss rate, and must be supplied by the main burner. For the flue-open and pilot-on curve, the heater is operated as it comes from the factory, with a standing pilot and with the flue always open. The total heat loss rate is the sum of the jacket heat loss rate and the pilot-on flue heat loss rate; the main burner must supply the net water tank heat loss rate.

The curves show that the energy savings for the flue-blocked configuration (as compared to the as-received configuration) increase with increasing water temperature, while the savings for the electrical ignition only (flue open, pilot off) tend to remain relatively constant. Note that the total heat loss rate for the pilot-on case is given alternatively by the sum of the net water heat loss rate (Fig. 4) and the pilot-input combustion heat rate. In other words, the pilot is supplying

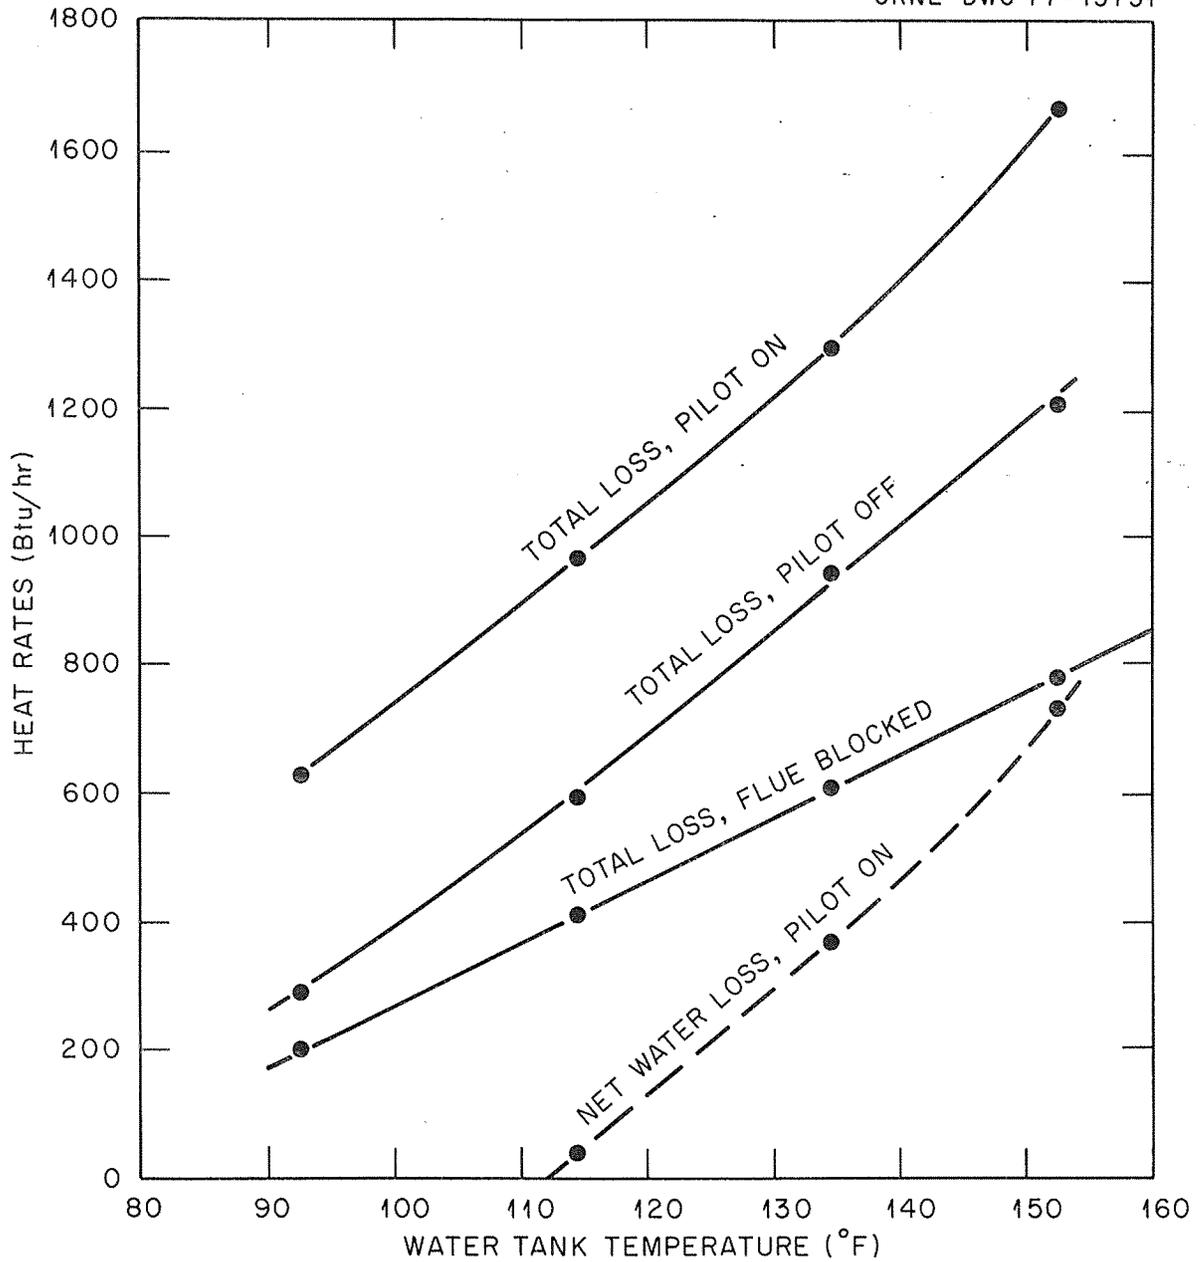


Fig. 4. Gas-fired water heater: total heat loss rates vs water tank temperature for three operational configurations.

924 Btu/hr (271 W), but the water is still falling in temperature. These results for the standby condition are shown in Table 3, together with the calculated total gas consumption required to maintain the water temperature assuming a main-burner heat-exchange efficiency of 73%.

Table 3. Heat loss rates and gas consumption during standby of gas-fired water heaters^a

	Water temperature, °F		
	110	130	150
Flue blocked ^b			
Heat loss rate, Btu/hr	370	562	760
Gas consumption, ft ³ /hr	0.49	0.74	1.00
Flue open, pilot off ^c			
Heat loss rate, Btu/hr	530	850	1180
Gas consumption, ft ³ /hr	0.69	1.1	1.57
Flue open, pilot on ^d			
Total heat loss rate, Btu/hr	924	1210	1604
Water net heat loss rate, Btu/hr	0	290	680
Gas consumption, ft ³ /hr	0.90	1.28	1.80

^aAmbient temperature = 70°F (21°C).

^bJacket loss rate supplied by intermittent firing of main burner.

^cJacket and flue loss rates supplied by intermittent firing of main burner.

^dWater net heat loss rate supplied by intermittent firing of main burner. Total heat loss rate consists of pilot burner consumption and water net heat loss rate.

The water heater has now been completely characterized for the cases of the pilot off and flue blocked, and flue unblocked and pilot off and on. The remaining characterization is for the case of the main burner on. This measurement is easy to do by the rate-of-temperature-rise method because the temperature-rise rates are high and are readily

measured. The parameter measured is termed overall thermodynamic efficiency, or service efficiency. It is given by

$$[(\text{input heat rate}) - (\text{total heat loss rate})]/(\text{input heat rate}) ,$$

which, in this case, translates into

$$\begin{aligned} & [(\text{input heat rate}) - (\text{flue heat loss rate}) \\ & - (\text{jacket heat loss rate})]/(\text{input heat rate}) . \end{aligned}$$

The results of the measurement are shown in Fig. 5 and also in Table 1. The service efficiency decreases with increasing water temperature because the heat loss through the jacket increases, and there will be a lower temperature difference between the hot flue gases and the water tank to drive heat exchange between the two. Another possible factor, flue gas velocity, seems to be almost independent of water tank temperature as long as the main burner is on. Table 1 also shows the maximum load in gallons per hour that the heater can heat from a ground water input temperature of 55°F (12.8°C). Gas-fired water heaters, in general, have a relatively high recovery rate compared with electric water heaters, because the input heat rate is much higher.

There is considerable room for improvement of the heat-exchange rate between the flue gases and the water tank, since the flue gases exit at a temperature of about 550°F (288°C).

For the main burner, although the water formed by the combustion of the fuel raises the dew point of the flue gases from 43.5°F (6.4°C) entering to 127°F (52.8°C) exiting, the latent heat of vaporization will not be recovered.

It should be evident from these data that efficiencies and heat-exchange rates vary with water tank temperature; for the pilot only, the variation is drastic. Any statement of efficiency of heat-exchange rate should specify the water tank temperature at which the measurement is made, and this temperature should fall within the bounds of reasonable hot-water temperatures [110 to about 190°F (43.3 to about 87.8°C)].

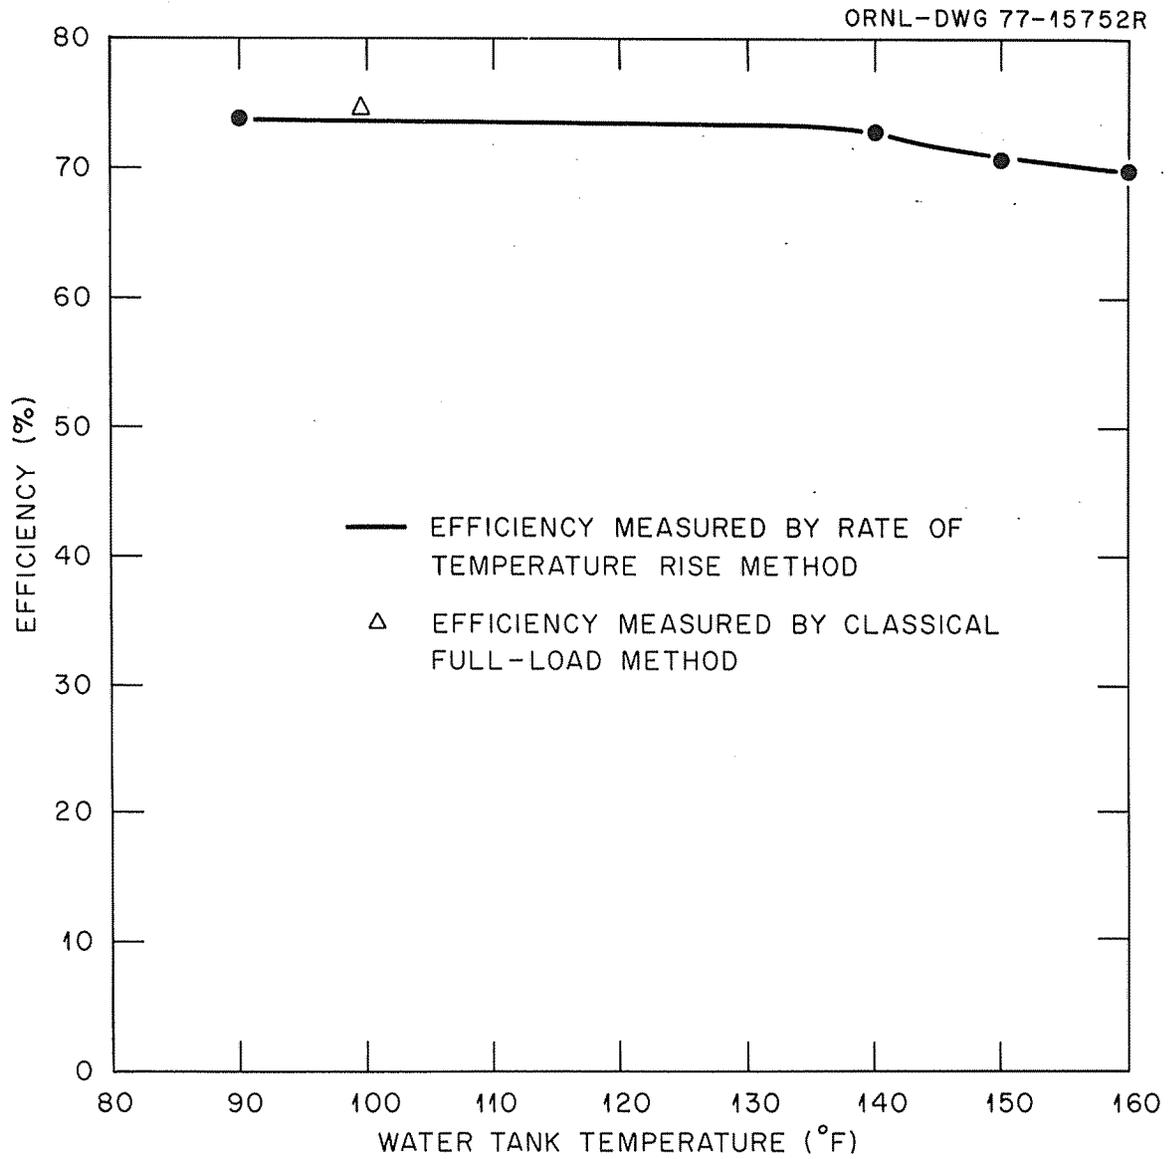


Fig. 5. Gas-fired water heater: service efficiency of main burner vs water tank temperature.

The efficiency of the heater was measured by the classical method of flowing water through the heater and measuring the temperature rise and flow rate. This method tends to measure the efficiency at an unrealistically low water tank temperature, although it need not do so. The value of 74.8% service efficiency at an average water tank temperature of 99.5°F (37.5°C) is in agreement with the measurement by rate-of-temperature-rise, but it is misleading to state that the service efficiency of this water heater is 74.8% without further qualification.

2.1.3 Further modifications to improve efficiency and energy conservation

In the previous section, two modifications were suggested following the measurement of the characteristics of gas-fired water heaters in the standby mode — flue blocking in the standby mode and electric ignition. Both of these eliminate the standing pilot burner, which is energy-inefficient. If both of these are invoked, then the standby heat loss rate is essentially the jacket heat loss rate. This can be reduced by (1) the addition of extra insulation internal to the jacket, which is feasible only at the time of manufacture; or (2) retrofit of additional insulation outside the jacket. For safety reasons, neither of these modifications should be attempted by the homeowner. Carbon monoxide production and explosion could be the result of improperly executed modifications. The gas-fired water heater was retrofitted in the laboratory by wrapping it with 3 1/2-in.-thick (8.9-cm), R-11 glass fiber building insulation, with the joints taped. The jacket heat loss rates for both the retrofit configuration and the as-received configuration are shown in Fig. 6 and in Table 4 as a function of water temperature. At a water temperature of 150°F (65.6°C), the extra insulation reduces the jacket heat loss rate to 40% of that without the extra insulation.

The pilot burner is an energy waster because it is operating under highly diluted combustion conditions. If the pilot could be made to operate at a fuel-air ratio nearer to stoichiometric, the heat transfer efficiency would increase and would not fall off so rapidly with increasing water temperature. The tremendous advantage of the standing

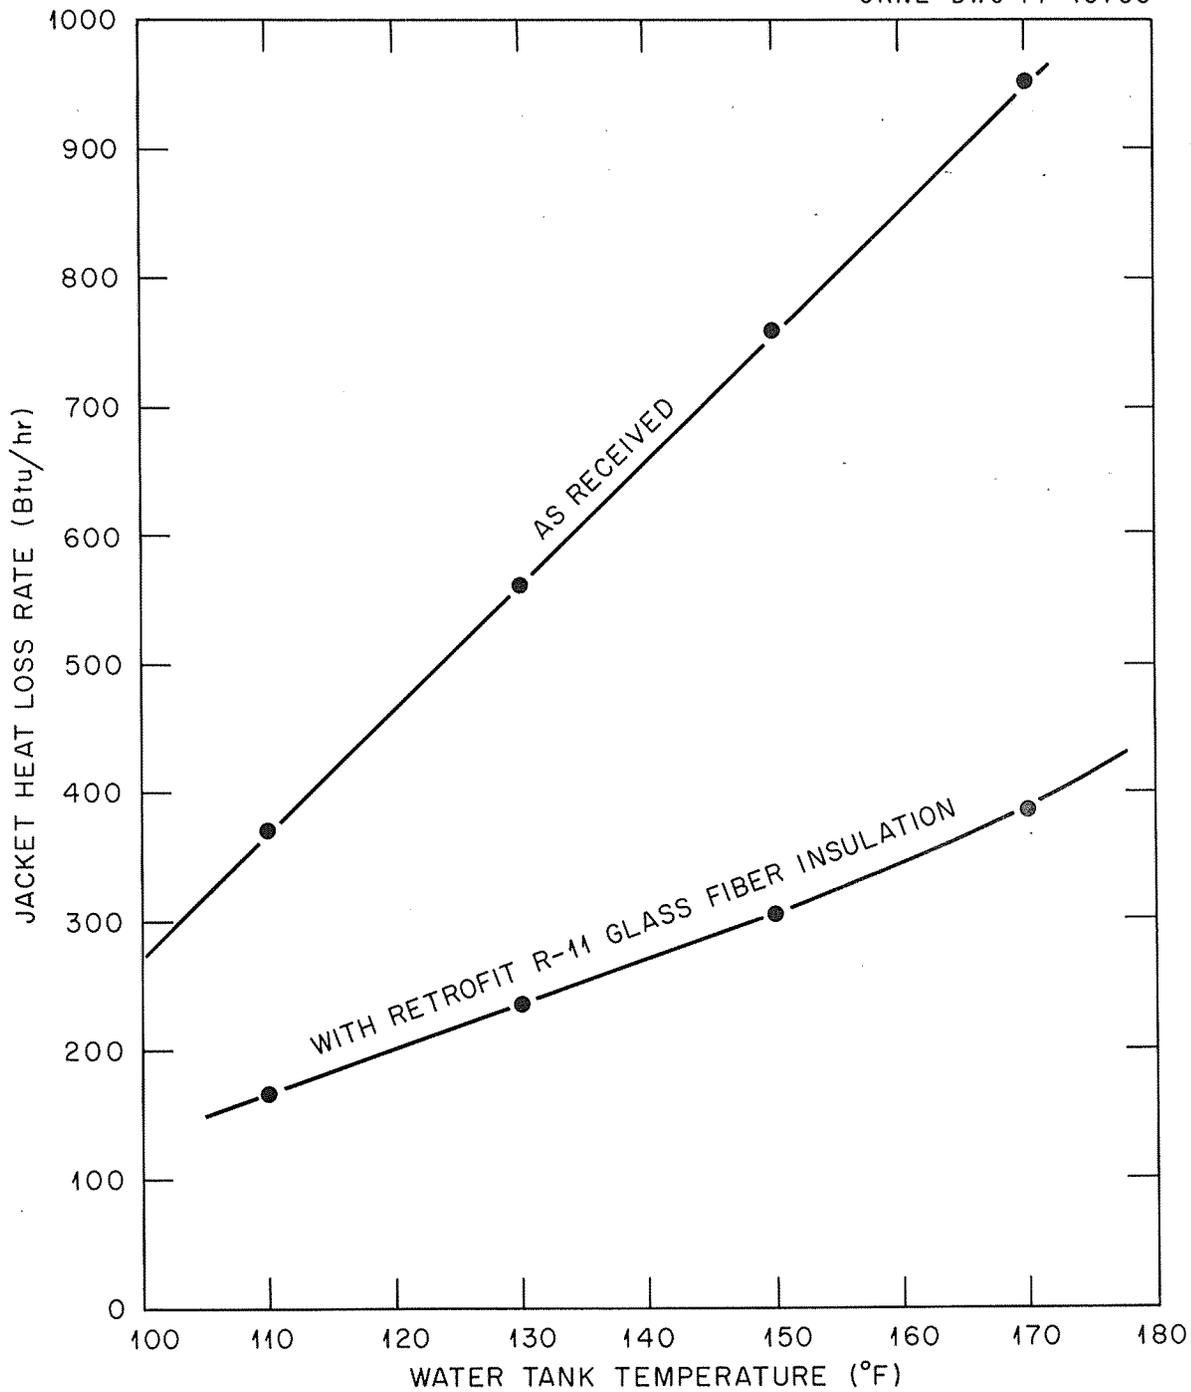


Fig. 6. Jacket heat loss rates for gas-fired water heater, as received and with retrofit insulation.

Table 4. Jacket heat loss rate for a
50-gal gas-fired water heater^a

Water temperature (°F)	Jacket heat loss rate, Btu/hr	
	As received	Retrofitted with 3 1/2-in. R-11 insulation
110	370	166
130	562	234
150	760	304
170	955	386

^aAmbient temperature = 70°F, measured with pilot light off and flue blocked.

pilot as a constant source of ignition for the main burner would be retained. This was done in the laboratory by restricting the stack orifice to approximately one-fiftieth of the original area. Of course, the main burner was not allowed to operate with the orifice restriction in place. The heat-exchange efficiency as a function of water temperature with this modification is shown in Table 5. With the orifice restriction and the R-11 retrofitted insulation, the water reached an asymptotic

Table 5. Pilot heat-transfer efficiency for gas-fired water heater with stack restricted by 5/16-in. orifice

Tank temperature (°F)	Heat-transfer efficiency (%)
110	77.6
140	75.5
160	71.0
170	69.0
180	64.0
186	53.0

temperature (heat-exchange rate balanced by jacket heat loss rate) of 186°F (85.6°C). If the heat-exchange efficiency is interpolated to be 72% (Table 5) with this configuration at a water temperature of 150°F (65.6°C), then the jacket heat loss rate of 304 Btu/hr (89 W) would be balanced by a pilot heat input of 442 Btu/hr (129 W), or 0.41 ft³/hr (1.16×10^{-2} m³/hr) (with further orifice restriction to maintain a proper excess-air ratio). This would be the total energy loss rate, since the water tank is neither increasing nor decreasing in temperature. The replacement of the restricted-orifice pilot with standby flue blocking and electric ignition would decrease the total energy loss rate to 304 Btu/hr, which hardly seems worth the trouble and expense. It would be highly advantageous if such a flue restriction could be applied and removed without the benefit of electrical service. Large quantities of heat energy are available when the main burner is firing, and it should be possible to transform some of this thermal energy to mechanical energy for removing an orifice restriction.

2.1.4 Power burner tests

Power gas burners with a standing pilot light are commercially available for use in gas furnace applications. One of these was rejected to 33,700 Btu/hr (9876 W) and installed in the 50-gal (0.1893-m³) gas-fired water heater. The base of the water heater was sealed so that combustion air could enter only through the blower intake. The air passages were sized so that the pilot operated with a reasonable excess-air ratio, and the additional air required for main burner consumption was supplied by the blower. A centrifugal switch on the blower motor opens an electric main gas valve only after the blower is up to speed. A disk-and-doughnut baffle array was installed in the flue, and the pilot gas flow was reduced to 0.56 ft³/hr (1.59×10^{-2} m³/hr), or 577 Btu/hr (169 W). The heater was equipped with the R-11 retrofit insulation for this test.

The water heater equipped with the power gas burner was not completely characterized as a function of water temperature, but some significant measurements were made of its performance. Referred to a

70°F (21.1°C) ambient, the asymptotic water tank temperature attained with only the pilot burning was 143°F (61.7°C). The jacket heat loss rate at this temperature, which exactly balances the heat input from the flue gas, is 280 Btu/hr (82 W), so the heat-exchange efficiency of the pilot burner at this temperature is 280/577, or 49%; and the total energy-loss rate is the input heat rate of 577 Btu/hr (169 W). The flue gas exit temperature without the disk-and-doughnut baffle array was 460°F (238°C) with the main burner on. The combination of the baffle and the power burner provided a dramatic improvement in main burner performance. At a water temperature of 160°F (71.1°C), the main burner heat-exchange efficiency was increased to about 85% (compared to 72% without the power burner), the excess-air ratio was 1.31, and the flue gas exit temperature was only 255°F (124°C). The implications of these improvements will be discussed in Sect. 4.

2.2 Electric Water Heaters

2.2.1 Description

The electric water heater tested in the laboratory was a fast-recovery type with a 66-gal (0.25-m³) nominal capacity. As shown in Fig. 7, the details of the tank, insulation, jacket, and water connections are similar to the gas-fired water heater. The tank is 20 in. (50.8 cm) in diameter and 48.5 in. (123 cm) tall. Two inches (5.1 cm) of glass fiber insulation separate the tank wall and the outer jacket. Total-immersion heaters of 4500 W nominal rating each are located near the top and bottom of the heater. Thermostats near the top and bottom of the heater control the heating elements to prevent simultaneous operation. They are usually set for the same temperature. If the top thermostat is calling for water heating, the top element is powered; convection currents in the water cause the water between the heating element and the outlet to be heated. When the top thermostat is satisfied, the thermostat transfers the electrical power to the bottom thermostat, which powers the bottom heater. Convection currents cause the water between the lower element and the top of the tank to be heated. When the lower thermostat is

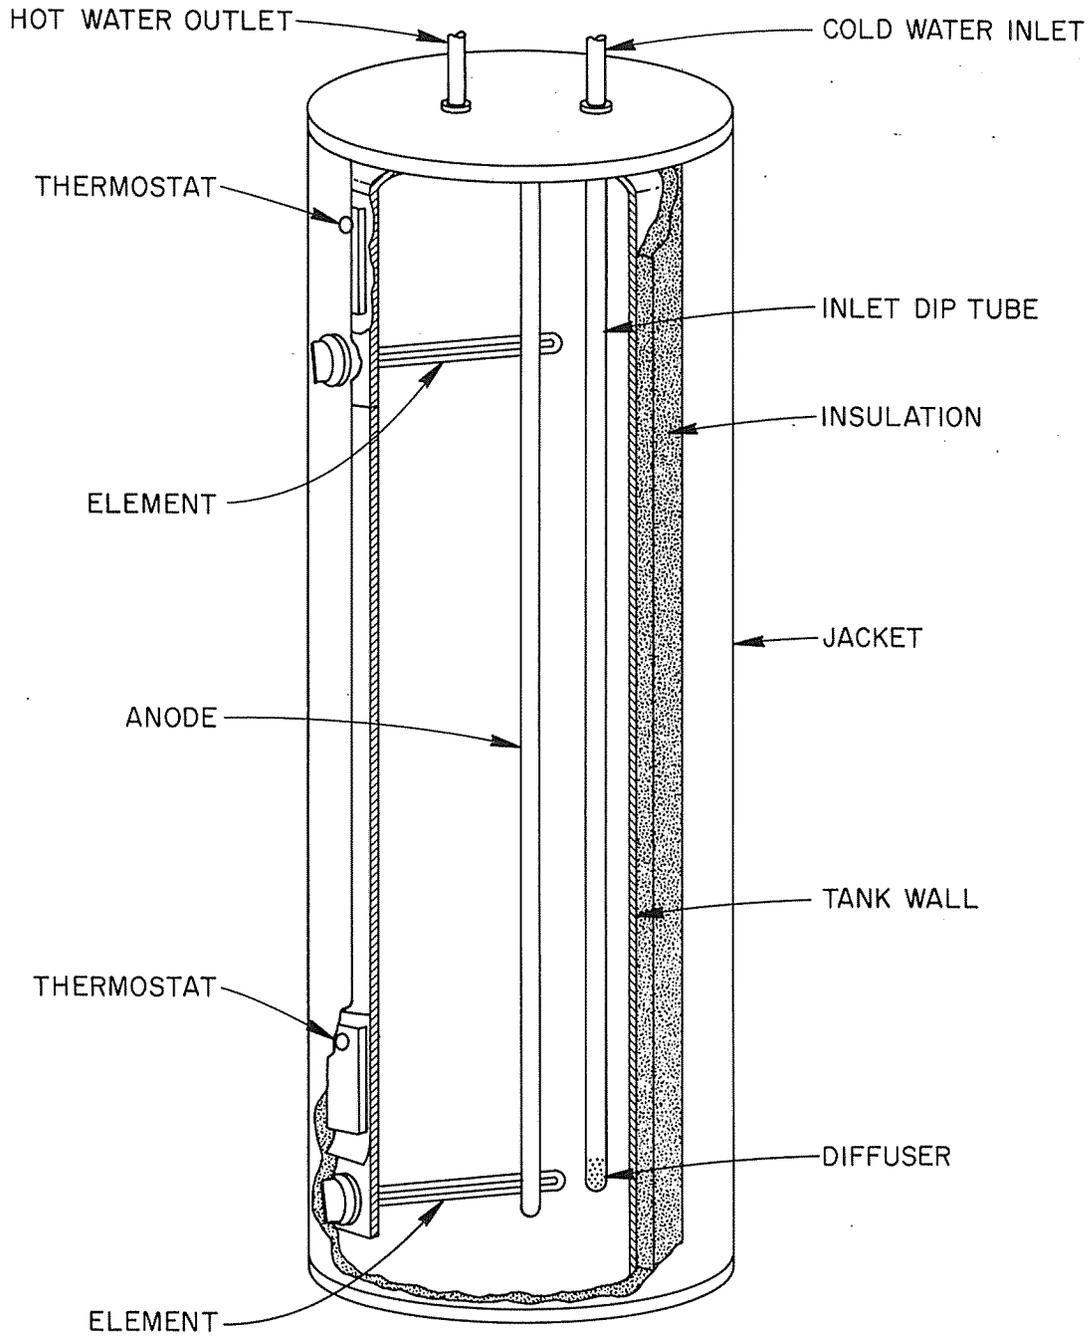


Fig. 7. Fast-recovery-type 66-gal electric water heater.

satisfied, both heaters are off. If the heater is recovering after having been totally drained of hot water, this arrangement allows a small volume of water at the top of the heater to be heated quickly, rather than waiting for the lower heater to heat the whole tank.

A 30-gal (0.1136-m^3), 2000-W mobile-home water heater was also tested in the laboratory. The dimensions of the tank are 16.6 in. (42.2 cm) in diameter by 32 in. (81.3 cm) high, and $3/4$ in. (1.9 cm) of glass fiber insulation separates the tank and the outer jacket. Unless otherwise stated, the following remarks will refer to the 66-gal (0.25-m^3) electric water heater.

A critical look at the design of the 66-gal (0.25-m^3) electric water heater indicates that the jacket loss per unit area of tank will be less for the same ambient temperature than that of the gas-fired water heater, because the insulation is thicker. The heat-exchange efficiency should be close to 100%, since the heaters are totally immersed in the water. The recovery rate of the electric heater should be lower than for the gas heater, since the heat-exchange rate is nominally 15,350 Btu/hr (4500 W) as compared with the gas water heater exchange rate of about 33,500 Btu/hr (9818 W). The rate of temperature rise during recovery will be less than the factor indicated by the heat-exchange input heat rates, since the electric water heater tank is larger. The power input rate to the electric water heater elements was measured as 4200 W (14,330 Btu/hr) instead of the nominal rating of 4500 W.

2.2.2 Characterization of electric water heaters

The heat input rate from the elements, and the jacket and piping heat loss rates as a function of temperature, completely characterize the electric water heater. The jacket heat loss rate was measured (as for the gas-fired water heater) by the temperature-rate-of-decay method. The service efficiency is then:

$$[(\text{heat input rate}) - (\text{jacket heat loss rate})]/(\text{heat input rate}) .$$

These heat loss rates are shown in Fig. 8 and in Table 6 for various insulation configurations and water temperatures. Note that at 150°F (65.6°C), the retrofit R-11 insulation reduces the heat loss rate to 68% of that without the extra insulation, as compared with 40% of the heat loss rate without extra insulation for the gas-fired water heater. The electric water heater is equipped with more insulation at the factory, so the reduction in heat loss is less with the addition of extra insulation. Table 7 shows the service efficiency and recovery rate [55°F (12.8°C) in] for both electric water heaters in the as-received insulation configuration. The 66-gal (0.25-m³) electric water heater has a much lower maximum load or recovery rate than the gas-fired water heater and a higher service efficiency than the 30-gal (0.1136-m³) electric water heater. The 8-gal/hr (0.03-m³/hr) recovery rate of the mobile-home 30-gal (0.1136-m³) water heater is marginal for many family use patterns.

These efficiencies are quite high if the heat input rate from the power lines is considered. However, the overall efficiency of the electric power generation and distribution system is about 29%, so the above efficiencies must be multiplied by 0.29 to obtain the ratio (useful heat rate)/(heat rate input at power station). This latter ratio is significant in regard to conservation of energy resources. Historically, the cost of heat from the direct combustion of fossil fuels has been considerably lower than the cost from electric resistive heat, which may explain the rationale for the thicker insulation layer on the electric water heater.

2.3 Efficiency Evaluation of Water Heaters: Appliance Efficiency and Service Efficiency

The so-called appliance efficiency of a water heater credits the heater with a fixed useful output of hot water [for example, 75 gal heated from 55 to 150°F (12.8 to 65.6°C)] during a fixed time period — for example, 24 hours — and charges the heater with both the useful output and the total energy losses for the full period. In general, the heater is capable of producing the useful output in a small fraction of the fixed time period. The appliance efficiency is thereby distinguished from the instantaneous, or service, efficiency in that the heater is

ORNL-DWG 77-15755

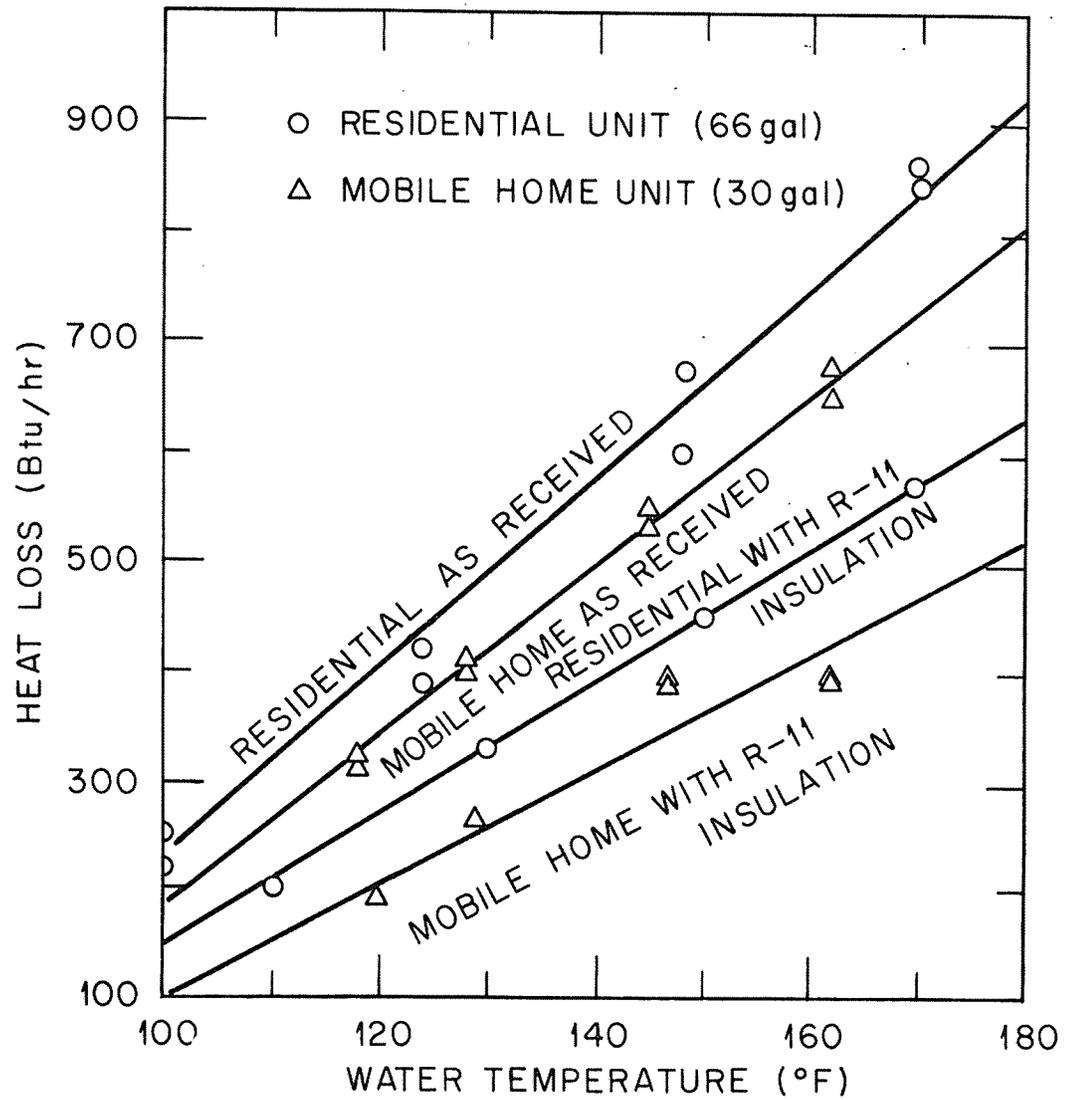


Fig. 8. Standby heat loss rates for electric water heaters vs water temperature with typical data points shown (ambient temperature = 70°F).

Table 6. Standby heat losses of electric water heaters^a

Water temp. (°F)	Standby heat loss, Btu/hr				
	66-gal residential			30-gal mobile home	
	As received (2-in. ins.)	1 1/2-in. kit retrofitted	3 1/2-in. R-11 retrofitted	As received (3/4-in. ins.)	3 1/2-in. R-11 retrofitted
110	315	227	206	265	151
130	487	351	325	420	256
150	660	482	446	577	360
170	832	610	569	731	477

^aAmbient temperature = 70°F.

Table 7. Full-load efficiency of 30- and 66-gal electric water heaters
(55°F input temperature)

Water temperature (°F)	Maximum load (gal/hr)	Service efficiency (%)
	<u>30-gal tank</u>	
110	14.4	96
130	10.4	94
150	8.0	92
	<u>66-gal tank</u>	
110	30.8	97.8
130	22.43	96.6
150	17.6	95.4

charged with the energy loss during standby conditions for long periods of time. The indirect consumptions of the heater, such as for air conditioning the combustion air or removing heat leaking through the jacket, are not considered in the definitions of either efficiency.

The definition of appliance efficiency brings up conceptual questions regarding its calculation. Since the heat loss rate of a water heater is dependent upon the water temperature, appropriate temperatures must be used for both the standby phase and the water heating phase of the daily operation. Also, the specification of a fixed output affects the efficiency of large versus small heaters. The suitable water temperatures for the two phases of heater operation will be considered first.

The concepts involved will be explained in terms of electric water heaters; specifically, the 66-gal (0.25-m³) heater. The heat loss rate of a heater is almost directly proportional to the difference between the water temperature and the ambient temperature within the temperature range of interest. This implies that the time rate of decay of the heater temperature without any heat input is closely exponential with time. If the temperature is allowed to decay a small fraction of the

temperature difference between the nominal thermostat set point and the ambient temperature, then the decay can be considered to be almost linear, and average temperatures can be used with little error. While the main heat source is on, the exponential term is overwhelmed by it, and again the average temperatures can be used with little error. If the hysteresis of the thermostat is centered on 150°F (65.6°C), then the time average of the tank temperature will be very close to 150°F (65.6°C), and the appropriate heat loss rate will be 660 Btu/hr (193 W) (from Table 6) during standby, if the thermostat hysteresis is not too large. If 75 gal/day (0.28 m³/day) of hot water is drawn at a constant rate of 3.125 gal/hr (0.012 m³/hr), then the influx of water at 55°F (12.8°C) will reduce the heat content of the stored water by 2451 Btu/hr (718 W), in addition to the 660 Btu/hr (193 W) lost through the jacket. This total loss rate is well within the 14,330 Btu/hr (4200 W) capacity of the main heating element, so the water temperature will stay within the thermostat dead band, the average will again be 150°F (65.6°C), and the average jacket heat loss will be 660 Btu/hr (193 W) during the recovery phase, or a total of 15,840 Btu/day (1672 MJ/day).

Assume that the water is delivered in two sudden draws of 37.5 gal (0.14 m³) each, with time between draws for complete recovery of the heater. The stratification within the heater is such that the output will be very close to the assumed temperature of 150°F (65.6°C) even at the end of the draw. The influx of cold water reduces the temperature of the tank to 96°F (35.6°C), so that the average temperature during water heating is the average of the thermostat set point and this temperature, or 123°F (50.6°C). The average heat loss rate during this period would be about 430 Btu/hr (126 W). The actual draw schedule will probably be between the two extremes of slow draw and fast draw cited above, and the appropriate average temperature during water heating would be between 123 and 150°F (50.6 and 65.6°C).

It is common practice to assume that the recovery efficiency, E_r , applies in all cases of water heater recovery regardless of the draw schedule. The recovery efficiency would be measured for the 66-gal (0.25-m³) electric water heater under the above-assumed conditions by filling the heater with water at 55°F (12.8°C) and measuring the total

input energy required to raise the water temperature to 150°F (65.6°C). The recovery efficiency would then be the quotient of the heat added to the water and the total heat input to the heater during the period. The recovery efficiency includes the initial heating period during which the efficiency is greater than 100% because heat flows into the water [initially at 55°F (12.8°C)] from the surroundings at 70°F (21.1°C). The effective average temperature during the recovery efficiency measurement is very close to the average of the starting and ending temperatures of the water, or 102.5°F (39.2°C). This is not a suitable temperature to use for calculating the heat loss rate through the jacket during the water heating phase. The difference in using the recovery efficiency and the actual heat loss rates is not large, so the error is more conceptual than actual. The heat loss rate at the thermostat set point will be used for appliance efficiency calculations as being more representative of the true situation.

Since the appliance efficiency is defined as the quotient of a fixed useful output and the sum of the useful output and the total losses for the stated period, it is obvious that the appliance efficiency can be increased by reducing the total losses. This may be done for an electric water heater by increasing the thickness and R value of the insulation or by reducing the size of the tank, using the same insulation configuration. The heat loss rate through the jacket of a heater with a given thickness and R value of insulation is closely proportional, for a given shape, to the area of the bare tank which in turn is proportional to $V^{2/3}$, where V is the volume of the tank. Stated mathematically, then,

$$\text{appliance efficiency} = \text{useful output} / (\text{useful output} + C_2 V^{2/3}) ,$$

where C_2 is the appropriate dimensioned constant to relate the surface area of the tank and the energy loss rate through the jacket. For a given C_2 (shape of tank, insulation thickness, and R value fixed), the appliance efficiency decreases monotonically with an increase in V. Thus an appliance which is not in conformity with a stated appliance efficiency criterion could be brought into conformance merely by reducing the size of the tank.

The original criterion for the performance of gas-fired water heaters in delivering a quota of hot water per day specified that the quota vary essentially as $V^{2/3}$, or the uninsulated tank area.³ With this specified variation, the expression for appliance efficiency becomes:

$$\text{appliance efficiency} = C_1 V^{2/3} / (C_1 V^{2/3} + C_2 V^{2/3}) ,$$

where C_1 is the dimensioned constant which relates the calculated heat output in the form of hot water and the surface area of the tank. This expression is obviously independent of the volume of the heater.

Service efficiency, previously defined, gives very little information regarding the performance of an electric water heater other than the relative magnitudes of the jacket heat loss rate and the input heat rate. This efficiency may be raised by increasing the wattage of the heating element, which has no effect upon the energy-conserving aspects of the performance; or by applying better insulation. Main heater elements in domestic electric water heaters seem to be limited to 4500 W (non-simultaneous operation is usually specified for heaters with two heating elements), so a stated service efficiency would discriminate against large electric heaters.

The calculated appliance efficiencies for the two electric water heaters tested are shown in Fig. 9 for two water temperatures. The jacket heat loss rates appropriate to the temperatures shown on the figure were used. The large heater had a greater thickness of insulation surrounding it, with a concomitantly lower heat loss rate per unit of tank area. However, the total heat loss rate of the large heater is larger, so it has a lower appliance efficiency than the poorly insulated mobile-home heater. This is an example of the size effect on appliance efficiency.

Domestic hot water requirements vary widely. Households that require large amounts of hot water each day should have a correspondingly large water heater. From an energy conserving point of view, it is generally not advisable to substitute several small water heaters for one large one, even though both definitions of efficiency might suggest otherwise.

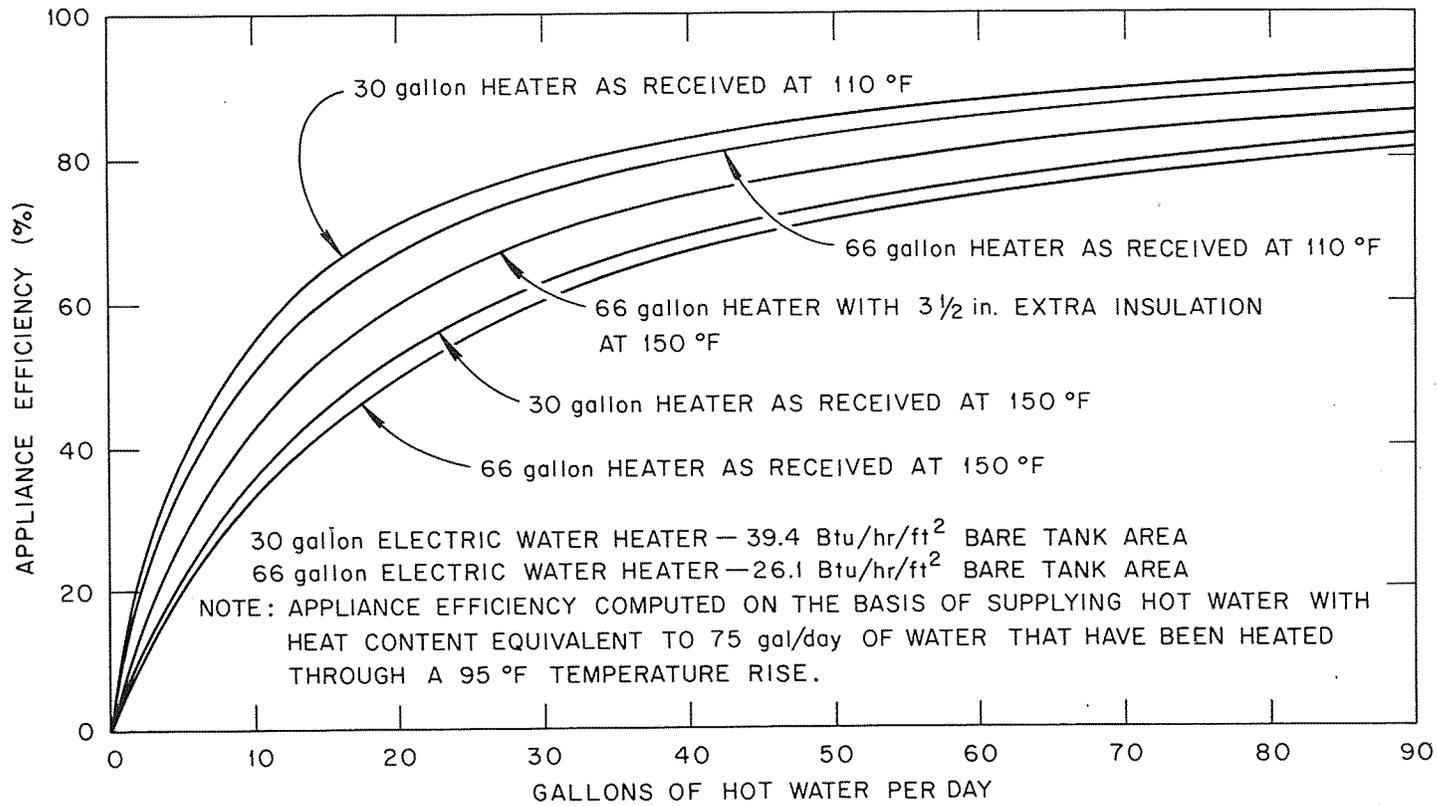


Fig. 9. Appliance efficiencies of electric water heaters.

For example, if we consider the two electric water heaters we have tested, we have already noted that the 30-gal (0.1136-m^3) water heater has a higher appliance efficiency than the 66-gal (0.25-m^3) heater even though the smaller heater has less insulation. From Table 6 we see that at 150°F (66°C) the 66-gal (0.25-m^3) water heater has a standby heat loss of 660 Btu/hr (193 W) whereas two 30-gal (0.1136-m^3) water heaters would have a total heat loss of 1150 Btu/hr (337 W). Even with retrofitted insulation of 3 1/2 in. (88.9 mm) on each tank the loss rate is 446 Btu/hr (131 W) for the 66-gal (0.25-m^3) tank versus 720 Btu/hr (211 W) for two 30-gal (0.1136-m^3) water heaters.

The calculation of the appliance efficiency for the gas-fired water heater is not as straightforward as for the electric water heaters because the jacket loss is supplied at a higher heat-exchange efficiency while the main burner is on. The appliance efficiency curves shown in Fig. 10 are for the as-received configuration and the retrofit insulation with flue-blocked configuration. At 150°F (65.6°C), the modification increases the appliance efficiency for delivery of 75 gal (0.28 m^3) of water per day from 0.48 to 0.65.

Appliance efficiency and service efficiency are essentially responsive to the total heat loss rate of a heater, thereby favoring small heaters. If, instead, one wishes to specify a criterion that is independent of both size and throughput, then the jacket heat loss rate per unit of bare tank area should be used. For both electric and gas-fired water heaters, this quantity is a good measure of insulation quality.

Gas-fired water heaters suffer flue losses in addition to jacket losses. There is considerable potential for reduction of flue heat loss rates in gas-fired water heaters. For the 50-gal (0.189-m^3) gas-fired water heater in the as-received configuration at a water temperature of 160°F (71.1°C), the main burner flue losses approached 28% and the flue gas exited at a temperature of 550°F (288°C). With the power burner modification, the main burner flue losses at the same water temperature were 15% and the flue gas exited at a temperature of 255°F (124°C). The main burner flue losses probably cannot be reduced much below 15% because some excess air must be provided to prevent carbon monoxide formation.

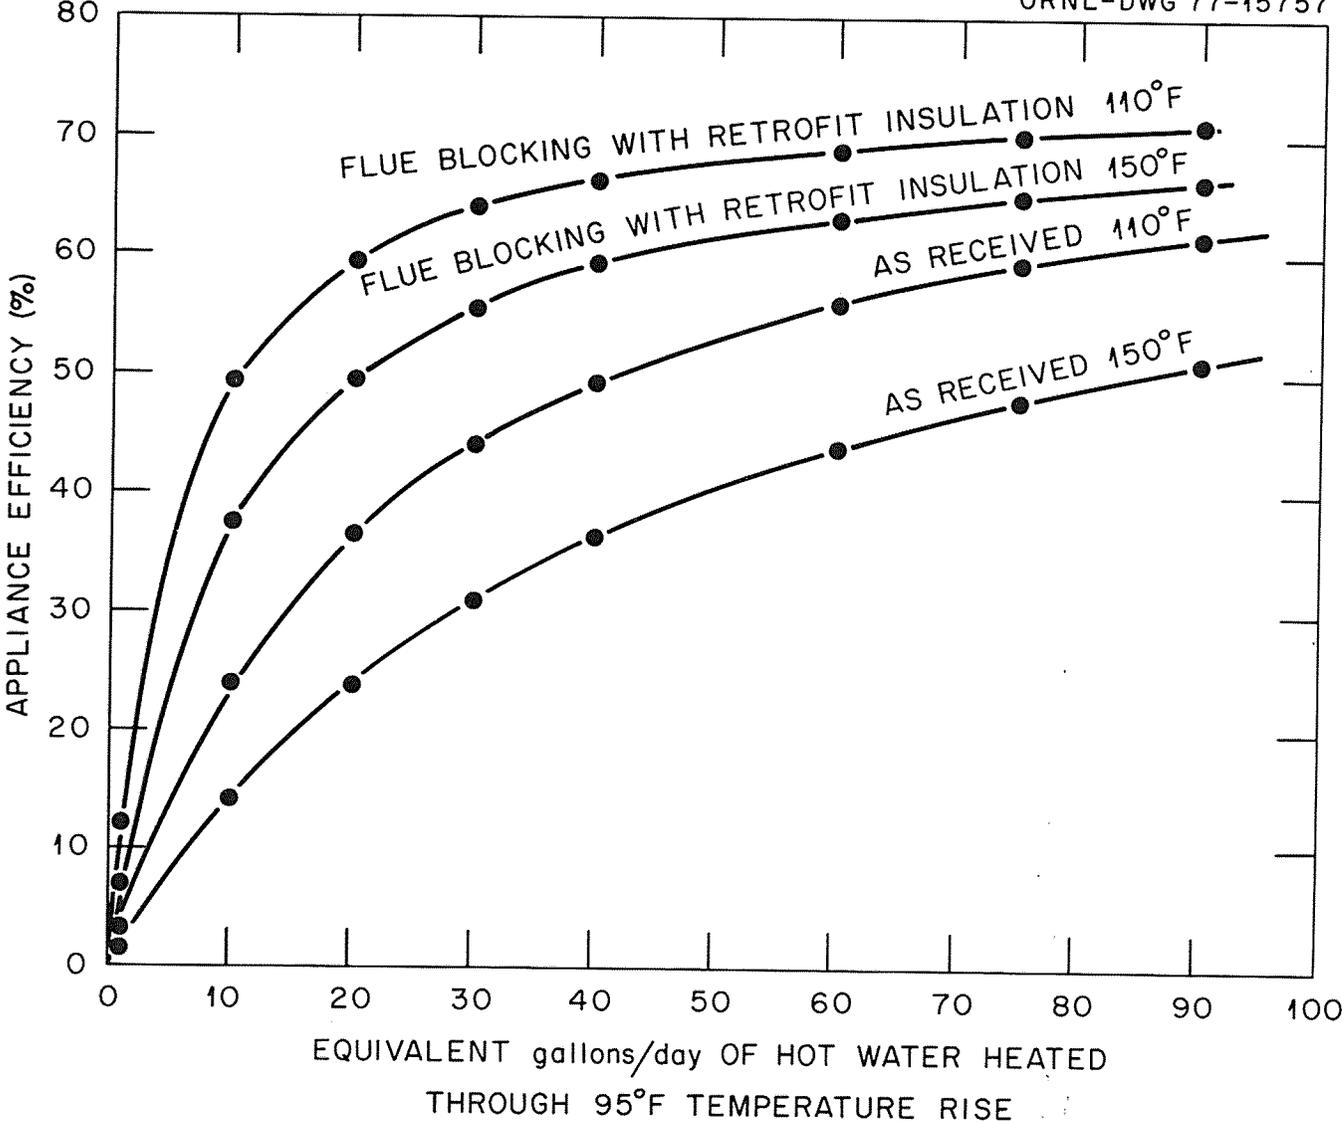


Fig. 10. Appliance efficiency of 50-gal gas-fired water heater.

The pilot burner flue losses in the as-received configuration were 92% at an operating temperature of 150°F (65.6°C). This heat loss rate was reduced to about 25% of the input by means of the flue orifice restriction, and was essentially eliminated by flue blocking with electric ignition.

The power burner pilot has a flue loss rate of 51% at a tank temperature of 143°F (61.7°C). The air intake orifice had to be adjusted to eliminate carbon monoxide in the main burner flue gas. The orifice could be restricted for pilot operation by a light flapper which is lifted by the blower draft.

3. ENERGY CONSERVATION PRACTICES IN THE HOME

Energy conservation measures undertaken in the home have varying effects upon the lifestyle of the occupants, and this is particularly true of hot water use patterns. For example, a shower or bath at 110°F (43.3°C) is the hottest water that most people can tolerate. The average bath temperature is about 105°F (40.6°C), and a shower at 100°F (37.8°C) would still feel warm. If this were the only criterion, then a water temperature of 110°F (43.3°C) would be satisfactory. The highest-temperature water is demanded by an automatic dishwasher for sanitary reasons. Many automatic dishwashers have auxiliary heaters to heat the water to a higher temperature if necessary, so with those machines, the lower limit on hot-water temperature would not be set by the automatic dishwasher. Dishwashing by hand is limited to water temperatures that a hand (probably in rubber gloves) can tolerate. The hand-rinse process might set a somewhat higher minimum temperature. Clothes washing involves so many variables, both physical and aesthetic, that no attempt will be made to specify a minimum hot-water temperature for this process.

In consideration of the above uses, the easiest way to save water-heating energy is merely to lower the thermostat setting. The standby heat loss rate is directly responsive to the lowered setting and is almost independent of the amount of water used. The thermostat setting can be lowered if none of the above uses are jeopardized and if the heat content of the stored water is adequate for the use schedule. For example, if a certain volume of water at 105°F (40.6°C) is obtained for a shower by mixing incoming water [at about 55°F (12.8°C)] and water from the heater, the total heat content of the water used is independent of the thermostat setting as long as it is 105°F (40.6°C) or higher. The heat content of the stored water is directly proportional to the difference between the storage temperature and the temperature of the incoming water and may not be adequate if the thermostat setting is too low. Another means of reducing the standby heat loss rate, which also reduces the heat content of the stored water, is to utilize a tank of smaller volume. If the smaller heater is assumed to have the same quality and thickness

of insulation as a larger heater, the total heat loss rate will be smaller because the surface area of the tank is smaller. However, the heat loss rate decreases less rapidly than the volume, so the smaller heater will have a greater heat loss rate per gallon of water (at a given temperature) than the larger heater.

Changes in lifestyle can compensate for a lower stored-heat content in the water heater. The heavier hot-water uses must be scheduled far enough apart for the heater to recover between uses. Other changes in habits can yield energy conservation in the total amount of hot water used. For example, the shower head can be restricted to 3 gal/min (11.4 liters/min), rather than the 10 gal/min (37.85 liters/min) or more of which most are capable. A 5-min shower at 3 gal/min (11.4 liters/min) uses nine times less water than a 15-min shower at 9 gal/min (34.07 liters/min). For a family of four, the monthly cost of daily showers at 0.0345 \$/kWhr is \$8.48 for the economy showers as compared with \$76.28 for the long, luxury showers [assuming an average ground water temperature for the year of 55°F (12.8°C)]. For maximum energy efficiency, dishwashers and clothes washers should be operated only when full, and the hot water should not be allowed to run continuously when shaving. It may be possible to do laundry in cold water, if suitable detergents are used.

Some other energy-conserving measures do not affect lifestyles. Retrofit insulation of electric water heaters (but *not* gas-fired water heaters, for reasons of safety) using R-11 home insulation is highly cost effective (see Sect. 4). Also, the location of the water heater can markedly affect the standby heat loss rate. Ideally the heater should be coupled to the living quarters in the heating season so that advantage may be taken of its heat loss rate, and decoupled in the cooling season so that the heat loss rate will not have to be removed by the air conditioner. Heaters are found in almost any conceivable location in the home, and the degree of coupling to the living quarters varies widely. In mobile homes, for example, the water heater is frequently located near the outer wall. One could conserve energy by having removable panels so that in the winter the heater is coupled to

the living quarters, and in the summer it is coupled to the outside by a removable panel on the outside wall. Insulation of hot-water pipes is only marginally cost effective because the amount of stored heat is small. Hot-water pipes should definitely not be cast into concrete floor slabs, which will act as large and effective heat sinks.

Energy conservation measures in the future may include solar heating of hot water and heat-pump water heaters. The latter could heat water at a coefficient of performance (heat output/heat input) approaching 3, instead of unity as for resistance heating.

4. ECONOMIC ANALYSIS OF STORAGE-TYPE WATER HEATERS

4.1 Gas-Fired Water Heaters

The economic virtues of the previously mentioned water-heater modifications need to be examined with regard to the present worth of the annual savings derived from such modifications. This will give an upper limit to the cost increment for the modifications that will still leave the homeowner with a positive savings after alternative uses for the money are considered. The alternate use to be followed is the investment of the money at 9% interest compounded annually for the expected life of the water heater, which will be taken as 10 years. The present worth, P , of a series of annual savings is $R[1 - (1 + i)^{-n}]/i$, where R is the annual saving, i is the compound interest rate per year, and n is the number of years under consideration. In the present case, $i = 0.09$ and $n = 10$ are assumed. For a \$1.00 annual saving, the present worth is \$6.42; for example, if a modification to the water heater saves \$1.00 per year, then \$6.42 can be invested in the modification at the beginning of the service life and still return to the homeowner the same amount as the money invested at 9% for 10 years.

The annual operating costs to be considered will be those of a family of four using 75 gal (0.284 m³) of hot water per day heated through a temperature rise of 95°F (52.8°C) [for example, from 55 to 150°F (12.8 to 65.6°C)]. If a thermostat setting lower than 150°F (65.6°C) is specified, then it is assumed that the energy content of the hot water used will still be the same as if the thermostat were set for 150°F (65.6°C).

The yearly operating costs for the above scenario are shown in Table 8 for the same configurations treated in Table 3: flue blocked between firings of the main burner, with the jacket losses supplied by the main burner; flue open and pilot off between firings of the main burner, with the jacket and pilot-off flue losses supplied by firings of the main burner; and flue open and pilot on between firings of the main burner (as-received), with the net water-tank loss rate supplied by the

Table 8. Operating costs and savings with pilot off and flue open or blocked during standby for a gas-fired water heater^a

	Water temperature, °F		
	110	130	150
As-received configuration			
Annual operating cost, \$/year ^b	71.25	78.10	88.46
Pilot off, flue open			
Annual operating cost, \$/year ^b	68.65	76.38	85.79
Annual saving compared to as-received, \$/year	2.60	1.72	2.67
Present worth of 10 years' savings, \$ ^c	16.69	11.04	17.14
Pilot off, flue blocked			
Annual operating cost, \$/year ^b	64.82	69.62	75.57
Annual saving compared to as-received, \$/year	6.43	8.48	12.89
Present worth of 10 years' savings, \$ ^c	41.28	54.44	82.75

^aGas cost assumed to be 1.98 \$/MBtu.

^bOperation includes supplying hot water with heat content equivalent to 75 gal/day of water that has been heated through a 95°F temperature rise.

^cPresent worth computed at 9% interest, 10-year life.

main burner. In the case of the gas-fired water heater with the pilot on, the cost of the standby heat loss rate and the cost of the heat required to raise the temperature of the incoming water are not simply additive, because the main burner supplies losses at a higher heat-exchange efficiency while it is on.

As shown in Table 8, sizable savings can be realized by lowering the thermostat setting if the final temperature and stored-heat content are adequate. No present worth can be assigned to this conservation measure, since it is free. Electric ignition (flue open and pilot off between main burner firings) would yield marginal returns if applied without flue blocking. The maximum cost of this device to the homeowner could not exceed \$10.00 to \$15.00 additional for cost effectiveness.

Blocking of the flue in addition yields appreciable savings over electric ignition alone. The additional acceptable equipment cost is \$40.00 to \$80.00.

The orifice restriction and power burner were evaluated only for the retrofitted R-11 insulation configuration. The power burner was not characterized for the full range of water-tank temperatures, so the economic analysis for these configurations will encompass only the retrofit insulation and a water temperature of 150°F (65.6°C). The results are shown in Table 9. The present-worth values are calculated relative to the as-received configuration of the water heater, with a standing pilot. The savings allocated to the retrofit insulation are abstracted in Table 9. It is clear that retrofit insulation is highly cost effective. The savings are about \$10.60/year, and the cost of the materials required to insulate a heater is about \$6.00 (retrofit insulation of gas-fired water heaters must not be attempted by the homeowner). The return over the useful life of the heater would then be about \$62.00. The present worth of the flue blocked, orifice restriction, and power burner modifications is more than the present retail cost (about \$115.00) of a new gas-fired 50-gal water heater. These modifications should be highly cost effective.

Compared with the orifice restriction, the power burner derives its improved cost performance from the higher main burner efficiency [at 150°F (65.6°C), 85% as compared with 73%]. The cost of raising the temperature of the input water is \$8.15 lower for the power burner, but this advantage is reduced to \$4.85 because of the lower pilot heat-exchange efficiency. The pilot burner excess-air ratio was not optimized, so improvements in the pilot heat-exchange efficiency are possible.

4.2 Electric Water Heaters

The standby jacket heat loss rates of the two electric water heaters in the various retrofitted insulation configurations listed in Table 6 are translated into annual savings in Table 10. The savings are remarkably high because the cost of electricity (at 3.45 ¢/kWhr) is 10.11 \$/MBtu as opposed to 1.98 \$/MBtu for gas. However, the gas is

Table 9. Operating costs of as-received and modified gas-fired water heater while delivering 75 gal/day of 150°F hot water^a

Configuration	Annual operating cost ^b (\$/yr)	Savings compared with as-received (\$/yr)	Present worth of savings ^c (\$)
As-received	88.46		
Pilot off	85.79	2.67	17.14
Pilot off, flue blocked	75.57	12.89	82.75
Retrofit insulation			
Pilot on	77.83	10.63	68.24
Pilot off	75.10	13.36	85.77
Pilot off, flue blocked	64.96	23.50	150.87
Flue orifice restriction	65.06	23.40	150.23
Power burner	60.21	28.25	181.37
Savings attributable to retrofit insulation only			
Pilot on		10.63	68.24
Pilot off		10.69	68.63
Pilot off, flue blocked		10.61	68.12

^aGas cost assumed to be 1.98 \$/MBtu.

^bOperation includes supplying 75 gal/day of water that has been heated through a 95°F temperature rise (heat equivalent = 58,282 Btu/day).

^cPresent worth computed at 9% interest, 10-year life.

Table 10. Cost of standby heat losses for electric water heater^a

Water temp. (°F)	As-received annual cost ^b (\$/year)	1 1/2-in. retrofit insulation			3 1/2-in. retrofit insulation		
		Annual cost ^b (\$/year)	Annual saving (\$/year)	Present worth of savings ^c (\$)	Annual cost ^b (\$/year)	Annual saving (\$/year)	Present worth of savings ^c (\$)
<u>66-gal heater</u>							
110	27.92	20.12	7.80	50.08	18.26	9.66	62.02
130	43.16	31.11	12.05	77.36	28.81	14.35	92.13
150	58.50	42.72	15.78	101.31	39.53	18.97	121.79
<u>30-gal heater</u>							
110	23.49				13.38	10.11	64.91
130	37.23				22.69	14.54	93.35
150	51.14				31.91	19.23	123.46

^aElectricity cost assumed to be 0.0345 \$/kWhr.

^bFor the total operating cost, add the cost of heating 75 gal/day through a 95°F temperature rise, or \$215.24 per year.

^cPresent worth computed at 9% interest, 10-year life.

utilized at about a 73% heat-exchange efficiency, so the cost of gas is $\$1.98/0.73$, or 2.71 $\$/\text{MBtu}$ ($2.57 \text{ \$/}10^9 \text{ J}$) actually delivered to the water tank. In all cases, the cost of the R-11 retrofit insulation ($\$5.00$ to $\$6.00$) is returned within one year, with present worths ranging to an appreciable fraction of the cost of a new heater [$\$175$ for a 66-gal (0.25-m^3) electric, fast-recovery water heater]. The 1 1/2-in. (3.81-cm) retrofit insulation consists of a commercially supplied kit that includes glass fiber insulation with a flame-proof vinyl sheet backing, which results in a neat installation. Although this kit decreased the heat loss rate less than for the R-11 insulation and cost more ($\$10.00$ to $\$20.00$ retail), it is still quite cost effective. The cost to heat 75 gal (0.28 m^3) of water per day through a temperature rise of 95°F (52.8°C) is $\$215.24/\text{year}$, which should be added to the figures in Table 10 to determine the total cost of operating the heater.

4.3 Indirect Energy Usage of Storage-Type Water Heaters

A water heater may properly be charged with both its direct consumption of energy and with the energy that it, by its operation, causes to be consumed. If a gas-fired water heater is located within the conditioned living space, the airflow out of the chimney causes infiltration of makeup air, which must be conditioned by the space-heating and air-conditioning installation in the house. The jacket heat loss rate, if needed, aids in space heating; conversely, this heat must be removed during periods of space cooling. These considerations apply only to the degree that the water heater space is coupled to the living space.

Chimney airflows induced by a water heater (similar to the water heater tested in the laboratory) inside a residence were measured. The chimney airflow was 1.39 times the flue airflow with the pilot on and 1.93 times the flue airflow with the main burner on. Using the measured flue airflows from Table 2, the total chimney airflow was calculated as $17,163 \text{ ft}^3/\text{day}$ ($486 \text{ m}^3/\text{day}$) to deliver 75 gal (0.28 m^3) of water and supply standby losses. Assuming an average specific volume for the heated air of $14.75 \text{ ft}^3/\text{lb}$ ($0.92 \text{ m}^3/\text{kg}$), $1164 \text{ lb}/\text{day}$ ($528 \text{ kg}/\text{day}$) of air

were conditioned. The heat required per Fahrenheit degree of temperature difference is $282 \text{ Btu}/^{\circ}\text{F}^{-1}\text{day}^{-1}$ ($1.65 \times 10^5 \text{ J}/^{\circ}\text{C}^{-1}\text{day}^{-1}$). A gas furnace operating at 50% efficiency² would consume $562 \text{ Btu}/^{\circ}\text{F}^{-1}\text{day}^{-1}$ ($3.3 \times 10^5 \text{ J}/^{\circ}\text{C}^{-1}\text{day}^{-1}$) to supply this heat. The cost per month, at $1.98 \text{ \$/MBtu}$ ($1.88 \text{ \$/}10^9 \text{ J}$), would be $0.034 \text{ \$/}^{\circ}\text{F}^{-1}\text{mo}^{-1}$ ($0.061 \text{ \$/}^{\circ}\text{C}^{-1}\text{mo}^{-1}$), or $1.02 \text{ \$/month}$ for an average temperature difference of 30°F (16.7°C). This is an appreciable fraction of the $2.30 \text{ \$/month}$ standby cost of maintaining the gas-fired water heater at 150°F (65.6°C) in the as-received configuration. During a hot month in which the outside temperature remained above a set point of 78°F (25.6°C) for $200 \text{ }^{\circ}\text{F-days}$ ($111 \text{ }^{\circ}\text{C-days}$), the total heat to be removed from the living space would be $282 \text{ Btu}/^{\circ}\text{F-day}$ ($1.65 \times 10^5 \text{ J}/^{\circ}\text{C}^{-1}\text{day}^{-1}$) times $200 \text{ }^{\circ}\text{F-days}$ ($111 \text{ }^{\circ}\text{C-days}$), or $56,400 \text{ Btu}$ ($3.2 \times 10^6 \text{ J}$). An air conditioner operating with an energy-efficiency ratio of 7 Btu/Whr (2 J/J) would consume 8057 Whr ($29 \times 10^7 \text{ J}$), which would cost $\$0.28$ for the month.

The jacket heat loss rate of a gas-fired water heater or an electric water heater contributes to the space heating during the heating season if the appliance is located in the living space. The degree to which credit may be taken for a constant, uncontrollable heat source in the living space is arguable. The electric heater may be said to be 100% efficient under these conditions, but not for heating water. For the gas-fired water heater at 150°F (65.6°C), 92% of the pilot burner heat input goes up the flue, so it contributes very little to space heating. Also, energy used to warm the incoming air helps to offset any heating credit. Many water heaters are located in spaces that are loosely coupled to the living space; therefore, credit can be taken for the jacket heat loss rate only if the details of the installation are closely defined.

The jacket heat loss rate must be removed by the air-conditioning system during the cooling season. Table 11 shows the cost per month of continuous air conditioning for removing this heat rate. If the air-conditioning system runs for one continuous month of the year, the extra insulation pays for itself by reducing the air-conditioning load for some of the situations. For example, the gas water heater at 150°F (65.6°C)

Table 11. Cost per month of continuous air conditioning to remove water heater jacket loss from conditioned space^a

Heater type and configuration	Water temperature, °F		
	110	130	150
Gas heater, as received	\$1.31	\$2.01	\$2.70
Gas heater, 3 1/2-in. retrofit insulation	0.60	0.84	1.09
Electric heater, 66-gal, as received	1.13	1.75	2.38
Electric heater, 66-gal, 3 1/2-in. retrofit insulation	0.74	1.17	1.61

^aMonthly operating cost computed on basis of air conditioner energy efficiency ratio of 7.0 Btu/Whr and electricity cost of 0.0345 \$/kWhr.

requires \$1.61 less per continuous month of running for heat removal if it is insulated with R-11 glass fiber insulation. This saving, over a 10-year period, has a present worth of \$10.34.

5. SUMMARY AND CONCLUSIONS

The heat loss through the jacket is the only major heat loss mechanism for the electric water heater, and is one of the two heat loss mechanisms for the gas-fired water heater. At a tank temperature of 150°F (65.6°C) and an ambient temperature of 70°F (21.1°C), the retrofit of 3 1/2 in. (8.9 cm) of glass fiber insulation reduced the 66-gal (0.25-m³) electric water heater jacket heat loss rate to 68%, and the gas-fired water heater jacket heat loss rate to 40% of that without the extra insulation. The cost of the extra insulation (about \$6.00) would be paid back to the homeowner through energy savings in about 4 months for the electric water heater and in about 7 months for the gas-fired water heater. We conclude that more insulation should be installed at the factory on both types of heaters, and existing *electric* water heaters should have additional insulation retrofitted.

The other major heat loss mechanism for the gas-fired water heater is the flue. The flue loss percentage is particularly high for the pilot burner because it must operate with an excess-air ratio of about 50, caused by the necessary sizing of the flue for the main burner. The pilot flue loss for the gas-fired water heater was measured as 58% at 110°F (43.3°C) and 92% at 150°F (65.6°C). This was reduced to 22% at 110°F (43.3°C) and about 28% at 150°F (65.6°C) by flue restriction to a 5/16-in. (0.79-cm) orifice. The pilot flue loss was eliminated completely by blocking the flue during standby conditions. Provision must be made for removing the flue restriction or block by mechanical or electrical means whenever the main burner is on, and for igniting the main burner electrically when the flue block is removed.

An electrically powered burner and improved flue baffle increased the heat-exchange efficiency of the main burner from about 72% at 160°F (71.1°C) to about 85% at the same temperature. The combination of additional insulation and either flue restriction, flue blocking, or power burner was highly cost effective. The present worth of savings, computed at 9% interest for 10 years, for these configurations was about \$150, \$151, and \$181, respectively.

REFERENCES

1. Eric Hirst and Janet Carney, *Residential Energy Use to the Year 2000: Conservation and Economics*, ORNL/CON-17 (November 1977). [See also W. D. Lee and R. P. Wilson, *Energy Saving Options for Refrigerators and Water Heaters*, FEA Contract CO-04-50228-00 (March 1977), and J. J. Mutch, *Residential Water Heating: Fuel Conservation, Economics, and Public Policy*, Rand Corporation Report R-1498-NSF (May 1974).]
2. E. C. Hise and A. S. Holman, *Heat Balance and Efficiency Measurements of Central, Forced-Air Residential Gas Furnaces*, ORNL/NSF/EP-88 (October 1975).
3. American National Standards Institute, *American National Standard for Gas Water Heaters, Volume I: Automatic Storage Heaters with Inputs of 75,000 Btu Per Hour or Less*, ANSI Z21.10.1-1974.

INTERNAL DISTRIBUTION

- | | |
|----------------------|-----------------------------------|
| 1. L. A. Abbatiello | 48. J. W. Michel |
| 2. S. I. Auerbach | 49-68. R. E. Minturn |
| 3. M. Baker | 69. W. R. Mixon |
| 4. V. D. Baxter | 70. J. C. Moyers |
| 5. S. E. Beall | 71. E. A. Nephew |
| 6. D. J. Bjornstad | 72. D. L. O'Neal |
| 7. J. R. Buchanan | 73. H. Postma |
| 8. R. S. Carlsmith | 74. C. K. Rice |
| 9. W. S. Chern | 75. M. W. Rosenthal |
| 10. C. V. Chester | 76. T. H. Row |
| 11. F. A. Creswick | 77. G. G. Slaughter |
| 12. R. M. Davis | 78. R. L. Spore |
| 13. J. G. Delene | 79. E. G. Struxness |
| 14. R. D. Ellison | 80. T. Takayama |
| 15. W. Fulkerson | 81. D. B. Trauger |
| 16. V. O. Haynes | 82. G. U. Ulrikson |
| 17. N. E. Hinkle | 83. D. J. Walukas |
| 18. E. A. Hirst | 84. T. J. Wilbanks |
| 19. E. C. Hise | 85. H. E. Zittel |
| 20. A. S. Holman | 86. A. Zucker |
| 21. C. C. Hopkins | 87. Biology Division Library |
| 22. P. L. Johnson | 88-89. Central Research Library |
| 23. S. I. Kaplan | 90. Document Reference Section |
| 24. D. Kaserman | 91-92. Energy Information Library |
| 25. R. S. Livingston | 93. Laboratory Records (RC) |
| 26. H. M. Long | 94-96. Laboratory Records Dept. |
| 27-46. P. M. Love | 97. ORNL Patent Office |
| 47. H. J. Metz | |

EXTERNAL DISTRIBUTION

98. Mike Barganier, c/o C&S Mortgage Company, 1619 Norcross-Tucker Road, Norcross, GA 30093
99. Ron Bishop, Johns-Manville Sales Corporation, P. O. Box 5108, Denver, CO 80217
100. J. O. Collins, Johns-Manville Sales Corporation, Research and Development Center, Ken-Caryl Ranch, Denver, CO 80217
101. Vic Pappas, United Cities Gas Company, 1200 Parkway Towers, 404 James Robertson Parkway, Nashville, TN 37219
102. Bill Tate, Portland General Electric Company, 1212 Georgia-Pacific Boulevard, Portland, OR 97205
103. Institute of Energy Analysis, ORAU - Library
104. Research and Technical Support Division, DOE-ORO
- 105-131. Technical Information Center, DOE, P. O. Box 62, Oak Ridge, TN 37830
- 132-600. External Energy Conservation Distribution Mailing List and Energy Conservation Office, Building 9102-1, Room 2

