

ORNL/HSSI (6953)/MLSR-2001/2

HEAVY-SECTION STEEL IRRADIATION (HSSI) PROGRAM (W6953)

**Monthly
Letter Status
Report**

November 2000

DOCUMENT AVAILABILITY

Reports produced after January 1, 1996, are generally available free via the U.S. Department of Energy (DOE) Information Bridge.

Web site <http://www.osti.gov/bridge>

Reports produced before January 1, 1996, may be purchased by members of the public from the following source.

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
Telephone 703-605-6000 (1-800-553-6847)
TDD 703-487-4639
Fax 703-605-6900
E-mail info@ntis.fedworld.gov

Web site <http://www.ntis.gov/support/ordernowabout.htm>

Reports are available to DOE employees, DOE contractors, Energy Technology Data Exchange (ETDE) representatives, and International Nuclear Information System (INIS) representatives from the following source.

Office of Scientific and Technical Information
P.O. Box 62
Oak Ridge, TN 37831
Telephone 865-576-8401
Fax 865-576-5728
E-mail reports@adonis.osti.gov
Web site <http://www.osti.gov/contact.html>

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

ORNL/HSSI (6953)/MLSR-2001/2

HEAVY-SECTION STEEL IRRADIATION
PROGRAM
JCN W6953

MONTHLY LETTER STATUS REPORT
FOR

NOVEMBER 2000

Submitted by

T. M. Rosseel
HSSI Project Manager

Compiled by
R. D. Godfrey

Submitted to
C. J. Fairbanks
NRC Project Manager

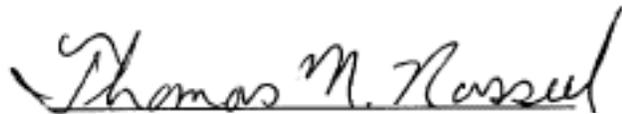
OAK RIDGE NATIONAL LABORATORY
Oak Ridge, Tennessee 37831
managed by
UT-Battelle, LLC.
for the
U. S. DEPARTMENT OF ENERGY
Under DOE Contract No. DE-AC05-00OR22725

PREFACE

This report is issued monthly by the staff of the Heavy-Section Steel Irradiation (HSSI) Program (JCN:W6953) to provide the Nuclear Regulatory Commission (NRC) staff with summaries of technical highlights, important issues, and financial and milestone status within the program.

This report gives information on several topics corresponding to events during the reporting month: (1) overall project objective, (2) technical activities, (3) meetings and trips, (4) publications and presentations, (5) property acquired, (6) problem areas, and (7) plans for the next reporting period. Next the report gives a breakdown of overall program costs as well as cost summaries and earned-value-based estimates for performance for the total program and for each of the eight program tasks. The six tasks correspond to the 189, dated March 23, 1998, and modified by the inclusion of the former "Embrittlement Data Base and Dosimetry Evaluation" Program, JCN 6164 in March, 1999. The final part of the report provides financial status for all tasks and status reports for selected milestones within each task. The task milestones address the period from April 1998 to December 2000, while the individual task budgets address the period from October 1999 to November 2000.

Beginning in October, 1992, the monthly business calendar of the Oak Ridge National Laboratory was changed and no longer coincides with the Gregorian/Julian calendar. The business month now ends earlier than the last day of the calendar month to allow adequate time for processing required financial reports to the Department of Energy. The precise reporting period for each month is indicated on the financial and milestone charts by including the exact start and finish dates for the current business month.



Thomas M. Rosseel, Manager
Heavy-Section Steel Irradiation

MONTHLY LETTER STATUS REPORT
November 2000

Job Code Number:	W6953
Project Title:	Heavy-Section Steel Irradiation Program
Period of Performance:	4/1/98 to 2/28/01
Performing Organization:	Oak Ridge National Laboratory
Program Manager:	T. M. Rosseel
Address:	P.O. Box 2008 Oak Ridge, Tennessee 37831-6138
Telephone:	(865) 574-5380
Telefax:	(865) 241-3650
Email:	rosseeltm@ornl.gov

1. PROJECT OBJECTIVE:

The primary goal of the Heavy-Section Steel Irradiation (HSSI) Program is to provide a thorough, quantitative assessment of the effects of neutron irradiation on the material behavior, and in particular the fracture toughness properties, of typical pressure vessel steels as they relate to light-water reactor pressure vessel (RPV) integrity. The program includes studies of the effects of irradiation on the degradation of mechanical and fracture properties of vessel materials augmented by enhanced examinations and modeling of the accompanying microstructural changes. Effects of specimen size; material chemistry; product form and microstructure; irradiation fluence, flux, temperature, and spectrum; and post-irradiation mitigation are being examined on a wide range of fracture properties. This program will also maintain and upgrade computerized data bases, calculational procedures, and standards relating to RPV fluence-spectra determinations and embrittlement assessments. Results from the HSSI studies will be incorporated into codes and standards directly applicable to resolving major regulatory issues that involve RPV irradiation embrittlement such as pressurized-thermal shock, operating pressure-temperature limits, low-temperature overpressurization, and the specialized problems associated with low upper-shelf welds. Six technical tasks and one for program management are now contained in the HSSI Program.

2. TECHNICAL ACTIVITIES:

TASK 1: Program Management (T. M. Rosseel)

This task is responsible for managing the program to ensure that the overall objectives are achieved. The management responsibilities include three major activities: (1) program planning and resource allocation; (2) program monitoring and control; and (3) documentation and technology transfer. Program planning and resource allocation includes: (a) developing and preparing annual budgetary proposals and (b) issuing and administrating subcontracts to other contractors and consultants for specialized talents not available at Oak Ridge National Laboratory (ORNL) or that supplement those at ORNL. Program monitoring and control includes: (a) monitoring and controlling the project through an earned-value, project-management system; (b) ensuring that quality assurance (QA) requirements are satisfied; and (c) issuing monthly management reports. Documentation and technology transfer includes: (a) participating in appropriate codes and standards committees; (b) preparing briefings for the NRC; (c) coordinating NRC and internal ORNL review activities; (d) coordinating domestic and foreign information exchanges approved by NRC; and (e) documenting the activities of the program through letter and NUREG reports.

(Milestone 1.1 A) Due to input problems, the three percent federal access charge (FAC) that was to be applied during this reporting period will instead be applied during the next reporting period to all uncosted funds including prior year carryover and committed funds as well as new obligations. The FAC was, however, applied to the FY 2001 incremental funding received during this reporting period.

Programmatic reductions are expected to result in the loss of a valuable staff member with extensive experience in crack-arrest studies, machining of irradiated pressure vessel materials, and annealing and reirradiation experiments.

(Milestone 1.1.B) The University of Michigan, Phoenix Memorial Laboratory informed the HSSI Program manager that due to new University requirements to obtain full-cost recovery for the operation of the Ford Nuclear Reactor (FNR), the cost of FNR services could double or even triple beginning in January. Since the current Program does not have funds budgeted for this type of increase, all options, including finding alternate test reactors, will be reviewed.

(Milestone 1.2.B) A schedule to complete the repairs of the 100-kip MTS servo-hydraulic machine in the Irradiated Materials Examination and Testing (IMET) hot cell # 3 has been completed and work has begun. Work is expected to be completed before the holidays. And it is now anticipated that testing of the KS-01 1T compact specimens, which will be used to examine shape of the master curve for highly-embrittled RPV material (see subtask 2.2), will resume in late December.

Unexpected reductions in support from several DOE programs as well as continued pressure from the HSSI Program to reduce costs has resulted in a potential shortfall in the support for the IMET hot cell facility. One option under serious consideration is a reduced operating schedule in FY 2001. Under this plan, the KS01 material would be tested, but testing of the PSI-supplied JRQ specimens (subtask 3.3) could be delayed until the fourth quarter of fiscal year 2001 or the first quarter of fiscal year 2002.

(Milestone 1.3.E) The draft NUREG report, *Attenuation of Charpy Impact Toughness Through the Thickness of a JPDR Pressure Vessel Weldment*, by S. K. Iskander, J. T. Hutton, L. E. Creech, M. Suzuki, K. Onizawa, E. T. Mannesmidt, R. K. Nanstad, T. M. Rosseel, and P. S. Bishop, was submitted to the NRC Program Monitor, thereby fulfilling an NRC intermediate operational milestone.

Task 2: Fracture-Toughness Transition and Master-Curve Methodology (M. A. Sokolov)

Fracture-toughness transition and master-curve (MC) methodology will be broadly explored for pressure-vessel applications through a series of experiments, analyses, and evaluations in eight Subtasks. For example, pertinent fracture-toughness data needed to assess the shift and potential change in shape of the fracture-toughness curves due to neutron irradiation will be collected and statistically analyzed. The effects of irradiation on fracture-toughness curve shape for highly embrittled RPV steels, dynamic effects, crack arrest, intergranular fracture, and subsized specimens will also be explored. Finally, guidelines for the application of "surrogate materials" to the assessment of fracture toughness of RPV steels will be evaluated.

Subtask 2.1: Fracture-Toughness Transition-Temperature Shifts (M. A. Sokolov)

The purpose of this subtask is to collect and statistically analyze pertinent fracture-toughness data to assess the shift and potential change in shape of the fracture-toughness curves due to neutron irradiation. The MC methodology will be applied to provide a statistical analysis of the fracture-toughness data and Charpy data will be fitted by hyperbolic tangent functions. The resulting reference fracture-toughness temperature, T_0 , shifts will be compared with Charpy shifts determined by various indexing methods.

(Milestone 2.1.A) As they become available, additional data are added to the database.

The report by M. A. Sokolov and R. K. Nanstad, *Comparison of Irradiation-Induced Shifts of K_{Jc} and Charpy Impact Toughness for Reactor Pressure Vessel Steels*, NUREG/CR-6609 (ORNL/TM-13755), was submitted to the NRC for publication in May 1999.

Subtask 2.2: Irradiation Effects on Fracture-Toughness Curve Shape (M. A. Sokolov)

The purpose of this subtask is to evaluate the assumption of constant shape for the MC even for highly embrittled RPV steels. The evaluation will be performed through irradiation of a pressure-vessel steel to a neutron fluence sufficient to produce a fracture-toughness transition-temperature shift (T_0) of about 150°C (270°F). Evaluation of the MC shape will be determined with sufficient numbers of 1T compact specimens, 1T C(T), to allow for testing at three temperatures in the transition-temperature region. Additionally, 0.5T C(T), and precracked Charpy V-notch (PCVN) specimens, for both quasi-static and dynamic tests, will be irradiated and tested to investigate the use of more practical surveillance-size specimens. Tensile specimens will also be included to determine the irradiation-induced hardening. A comprehensive test program with unirradiated material will be included to provide the necessary baseline data for comparison.

(Milestone 2.2.A) The servo-hydraulic machine in the hot cell is still under repair. The replacement actuator has been reconditioned and is being installed in the hot cell machine. To accomplish this task, the actuator has to be disconnected from the test frame, the cell roof plates removed, and the test frame and actuator separately removed from the hot cell. Following that removal, the reconditioned actuator will be placed into the cell, connected to the hydraulic lines, then the test frame placed into the cell and connected to the actuator. Because the actuator weighs nearly one thousand pounds and the test frame weighs about 4000 lb, substantial preparations and plans are required to accomplish the task. Additional funds have been received from NRC to accomplish this work and a schedule has been established by the hot cell staff.

The machine is scheduled to be back in service in mid-December. As soon as the repairs are complete and successful operation of the machine is verified, the testing of 1T C(T) of KS-01 weld will be resumed.

Irradiation of the Midland beltline weld and a high-nickel weld from the Palisades steam generator is under way and proceeding on schedule in the FNR at the University of Michigan.

Subtask 2.3: Dynamic Effects, Including Precracked Charpy V-Notch Testing (S. K. Iskander)

As reactors age, the operating window between the startup or shutdown K_a curve, generated from the allowable pressures and temperatures, and the K_{Ia} curve becomes smaller, making it difficult for plants to startup and shut-down. Dynamic testing of relatively small specimens will be evaluated as an alternative method to determine a lower bound to fracture toughness. Results from Subtask 2.5 (crack-arrest), which measures dynamic properties, will also be used in this subtask.

(Milestone 2.3.A) No significant activity during this reporting period.

Subtask 2.4: Irradiation Effects on Fracture Toughness of Midland RPV Weld (R. K. Nanstad)

The purpose of this subtask is to determine the transition-temperature shift and to evaluate transition-toughness curve shape for a low Charpy upper-shelf weld metal at a relatively high neutron fluence that will produce greater embrittlement damage than previously obtained with irradiations at lower fluences. This subtask will evaluate the assumption of constant shape for the MC with highly embrittled low-upper-shelf RPV steels that exhibit onset of stable ductile tearing at relatively low-fracture toughness. The evaluation will be performed through irradiation of the

beltline weld from the Midland Unit 1 RPV to a fluence of about 2.5 to 5×10^{19} n/cm² (>1 MeV) for which a substantial database of unirradiated and irradiated results to a fluence of 1×10^{19} n/cm² (>1 MeV) already exists. This research is needed to assess the fracture-toughness behavior of such a weld at high-embrittlement levels. Evaluation of the MC shape will be determined with sufficient numbers of 0.5T C(T) to allow for testing at three temperatures in the transition-temperature region. Additionally, PCVN specimens, for both quasi-static and dynamic tests, will also be irradiated and tested to investigate the use of more typical surveillance-size specimens, and tensile specimens will be included to determine the irradiation-induced hardening. A comprehensive-test program with unirradiated material was previously completed under the first HSSI Program (L1098) 10th Irradiation Series, except for dynamic testing of PCVN specimens, which will be included to provide the necessary baseline data for comparison.

(Milestone 2.4.D) The final report, *Evaluation of WF-70 Weld Metal from the Midland Unit 1 Reactor Vessel*, by D. E. McCabe, R. K. Nanstad, S. K. Iskander, D. W. Heatherly, and R. L. Swain, NUREG/CR-5736 (ORNL/TM-13748), was submitted to the NRC for publication in February 1999.

Further evaluation of the Midland beltline weld will be performed under Subtask 2.2.

Subtask 2.5: Crack-Arrest including Midland (S. K. Iskander)

In this subtask, the low-temperature operating pressure regulatory concerns will be addressed through testing of the 15 irradiated, Midland crack-arrest specimens. This evaluation will provide an excellent opportunity to determine whether the lower bounds of crack initiation and arrest toughness coincide for this very important class of irradiated LUS welds. These specimens, which were produced and irradiated as part of the previous HSSI (L1098) program, will be used to evaluate the lower and transition arrest-toughness values.

(Milestone 2.5.A) The draft NUREG report, *Detailed Results of Testing Unirradiated and Irradiated Crack-Arrest Toughness Specimens from the Low Upper-Shelf Energy, High Copper Weld, WF-70*, by S. K. Iskander, C. A. Baldwin, D. W. Heatherly, D. E. McCabe, I. Remec, and R. L. Swain, NUREG/CR-6621 (ORNL/TM-13764), is nearly complete and will be submitted for internal technical review.

Subtask 2.6: Intergranular Fracture (R. K. Nanstad and J. G. Merkle)

This subtask will address the issue of whether the MC technique can be applied to materials that experience brittle fracture by an intergranular mechanism. Specifically, it will be determined whether steels that experience intergranular fracture can be correctly characterized by the MC T_O temperature and whether the transition-curve shape can be changed by different fracture modes. Complete intergranular fracture from temper embrittlement occurs only at lower-shelf temperatures. As it is with transgranular cleavage, the transition to upper shelf is marked by an increased volume percentage of ductile rupture mixed with the lower-shelf, brittle-fracture mechanism. Since the onset of crack instability is most likely triggered in the brittle zones, the critical issue is understanding the influence of the triggering mechanism on the distribution of K_{Jc} values obtained. This information can be obtained on the lower shelf and, in part, into the transition range.

The proposed approach is to determine if there is an operational weakest-link effect when instability is triggered within an intergranular region. If an effect is observed, there should also be a measurable specimen-size effect on K_{Jc} . It will also be determined if the temper-embrittled materials exhibit a change in the J-R fracture toughness since such steels do not show a significant change in upper-shelf CVN energy.

(Milestone 2.6.B) As reported in the previous progress report, two broken halves of previously tested compact specimens were sent for machining to obtain 12 0.5T compact specimens for further testing. The specimens were received, fatigue precracked, and seven specimens were tested at -125°C , the temperature estimated to result in a median K_{Jc} value of about $75 \text{ MPa}\sqrt{\text{m}}$ using the Master Curve obtained from the previous results. The actual value obtained was very close to the predicted value based on the test results obtained at the higher temperatures. The remaining five specimens will be tested at a different temperature, and a multitemperature master curve analysis will be conducted and included in the final letter report. These tests will be conducted in November. Additional scanning electron fractography will be performed to evaluate the fracture mode of the specimens previously tested at the highest temperatures (room temperature and above). This fractographic evaluation will specifically evaluate the presence of so-called ductile intergranular fracture. This is an important aspect of the evaluation as it relates to the relationship between the master curve shape, which is used to describe unstable cleavage fracture in the ductile-brittle transition region, and unstable fracture by intergranular fracture. Based on discussions R. K. Nanstad held with French researchers during the IGRDM meeting (see 4.4) regarding their studies of intergranular fracture, they will send fracture toughness data from material, which exhibited intergranular fracture, for master curve analysis.

Subtask 2.7: Subsize Specimens (M. A. Sokolov)

The purpose of this subtask is to evaluate the applicability of the weakest-link theory-based size-adjustment procedure in the MC methodology to specimen sizes that are the most likely to be present in surveillance capsules. The MC methodology will be applied using precracked Charpy-size or smaller specimens to test the lower-size limit applicability. Testing will be performed at two or more temperatures with at least six specimens at each temperature. The exact number of temperatures and specimens will be determined following analysis of initial results. The testing of these subsize specimens will also satisfy the HSSI Program suggested testing matrix within the New Coordinated Research Program (CRP) of the International Atomic Energy Agency (IAEA). Subsize specimens will be fabricated from previously characterized materials within the HSSI Program, such as HSST Plate 02, HSSI Welds 68W through 73W, the Midland beltline weld and plate JRQ.

The program for the ASTM Fourth International Symposium on Small Specimen Techniques has been developed and posted on the ASTM web site. This symposium will be held in January of 2001 and M. A. Sokolov is serving as the Chairman.

(Milestone 2.7.A) Three blocks of materials were machined into 1T C(T) and precracked Charpy specimens for the size effect study. Two of the blocks are broken halves of 4T C(T) specimens of two A302B plates previously tested by the HSSI Program. The third block of material is the well-characterized Plate 13A. This study is specifically oriented towards an evaluation of the precracked Charpy specimen.

Subtask 2.8: Quantification of Surrogate Materials for use in a Statistics-Based Fracture Toughness Assessment (R. K. Nanstad and J. G. Merkle)

The purpose of this subtask is to establish guidelines for the use of "surrogate materials" in the assessment of fracture toughness of RPV steels. A plan will be developed to describe the information acquired and the means of collecting it, the method of evaluating the information, and the methods for using the information. Analyses will be performed to provide a methodology for determining limits for predicting fracture toughness of one material, i.e., a surrogate material, with measured fracture toughness of similar materials.

(Milestone 2.8.B) The draft NUREG report, *Considerations for Use of Surrogate Materials Data for Reactor Pressure Vessels*, by R. K. Nanstad, J. G. Merkle, and J. Galt, has been prepared and sent to the NRC technical monitor for review. The abstract was included in a previous progress

report. Further review of data, both unirradiated and irradiated, is continuing with a view towards eventual preparation of a table of uncertainties which could be utilized for evaluating the application of surrogate materials. This work is intended to be included in the final NUREG report on this subject.

Subtask 2.10: Dosimetry and Fluence Analysis of the IAR Irradiation Capsules from the First IAR Campaign (C. A. Baldwin, I. Remec, and T. M. Rosseel)

The purpose of this task is measure and analyze the dosimeters used during the first IAR Campaign and to obtain accurate fluence determinations.

(Milestone 2.10.A) No significant activity during this reporting period

Task 3: Irradiation Embrittlement of RPV Steel (S. K. Iskander)

The purpose of this task is to examine two important issues affecting the application of mitigation procedures to RPVs. The first addresses the effects of temper embrittlement on the coarse-grained HAZ in RPV steels. The second examines the effects of reirradiation on K_{Jc} and K_{Ia} in order to evaluate the relative changes in the recovery and reembrittlement between CVN and fracture-toughness properties and a detailed examination of reembrittlement rates. These questions will be addressed using the IAR facility designed, fabricated, and installed as part of the previous HSSI (L1098) program and with a matrix of irradiated and tempered specimens supplied by the Swiss Paul Scherrer Institut (PSI). Further data on reirradiation embrittlement will be obtained through reconstitution and reirradiation of previously irradiated specimens at the RRC-KI.

Subtask 3.1: HAZ Embrittlement (M. A. Sokolov and R. K. Nanstad)

Research conducted to date on temper embrittlement of the coarse-grain materials in HAZs of RPV steel multi-pass welds has revealed the potential for such embrittlement under some conditions. AEA-Technology discovered that using high-temperature austenitization to produce very coarse grains, followed by thermal aging resulted in large transition-temperature shifts. Further, post-irradiation mitigation of such material resulted in an even greater increase of the transition temperature. Subsequent research at ORNL under the previous HSSI Program (L1098) used five commercial RPV steels to investigate potential temper embrittlement. The first phase simulated the AEA-Technology heat treatment and observed large transition-temperature shifts, although not as large as those from AEA-Technology. The second phase of the ORNL study used the same five RPV steels, but used the Gleeble system (an electrical-resistance heating device) to produce material deemed representative of the coarse-grain region in RPV welds. These materials revealed very high toughness in the initial condition (i.e., from the Gleeble). After thermal aging at about 454°C for 168 hours the materials exhibited only modest transition temperature increases, however, after aging at the same temperature for 2000 hours, significant transition temperature increases were observed. Of course, 2000 hours is much in excess of the time that RPV steels would be exposed to mitigation cycles, but potential synergistic effects of irradiation and thermal aging are unknown. Moreover, questions also remain regarding other time-temperature effects, such as post-irradiation mitigation at somewhat lower or higher temperatures.

(Milestone 3.1.B) As noted in the previous progress report, following the observations of significant intergranular fracture on the irradiated/annealed specimens, further analyses and discussions are under way, with particular attention to the cooling rate following postweld heat treatment of the simulated HAZ material. To investigate the cooling rate effect, additional material would be treated in the Gleeble system to simulate the coarse-grain HAZ as accomplished previously. This would then be followed by thermal aging, as well as by irradiation and thermal

annealing. Excess material from the original investigation has been identified, and the proposed study will be discussed with the NRC technical monitor. Consideration is also being given to reirradiation of the remaining specimens from the initial series.

The paper by R. K. Nanstad et al., "Investigation of Temper Embrittlement in Reactor Pressure Vessel Steels Following Thermal Aging, Irradiation, and Thermal Annealing," presented at the ASTM 20th International Symposium on Radiation Effects on Materials, has been reviewed and is being modified for final submission to ASTM.

Subtask 3.2: Embrittlement Rate of Reirradiated Steel (S. K. Iskander, I. Remec, E. D. Blakeman, and C. A. Baldwin)

This subtask will examine the effects of reirradiation on K_{Ic} and K_{Ia} toughness of RPV steel so as to evaluate the relative changes in recovery and reembrittlement between CVN and fracture-toughness properties and to provide a detailed examination of reembrittlement rates. This will be accomplished using the HSSI IAR and the University of California Santa Barbara (UCSB) irradiation facilities at the University of Michigan, Ford Nuclear Reactor (FNR), and through the reirradiation of previously irradiated specimens at RRC-KI, if funding is available. Emphasis will also be placed on completing dosimetry calculations for the new IAR facility.

(Milestone 3.2.B) Neutronics Analysis of the IAR/UCSB Irradiation Capsules (I. Remec, E. D. Blakeman, and C. A. Baldwin). The report entitled: *Characterization of the Neutron Field in the HSSI/UCSB Irradiation Facility at the Ford Nuclear Reactor*, by I. Remec, E. D. Blakeman, and C. A. Baldwin, NUREG/CR-6646 (ORNL/TM-1999/140) was submitted to the NRC in September 1999.

(Milestone 3.2.C) No significant activity during this reporting period.

Subtask 3.3: Evaluation of Reirradiated JRQ Specimens (R. K. Nanstad, and T. M. Rosseel)

The purpose of this subtask is to examine the fracture-toughness behavior of a model steel that has been irradiated, tempered, and re-irradiated. The specimens, identified as JRQ, will be supplied by the Swiss PSI from a terminated research program.

(Milestone 3.3.A) The testing of the JRQ specimens from the Paul Scherrer Institute has been placed on hold due to scheduling and cost issues in the hot cells, particularly the need for repair of the servo-hydraulic machine.

Task 4: Validation of Irradiated and Aged Materials (R. K. Nanstad)

The purpose of this task is to validate the assessment of the effects of neutron irradiation on the fracture-toughness properties of typical RPV materials obtained in the previous HSSI (L1098) Program, tasks 2 and 3 of this program, and retired RPVs. This will be accomplished through the examination of the effects of neutron irradiation on the fracture toughness (ductile and brittle) of the HAZ of welds and of typical plate materials used in RPVs. The irradiated materials from retired RPVs will be machined and tested in the Irradiated Materials Examination and Testing (IMET) hot cells. The feasibility of reconstitution for CVN and 0.5T C(T) and aging of stainless steel welds will also be explored in this task. Other issues to be addressed include foreign interactions and technical assistance to the NRC.

Subtask 4.1: Examination of Materials from Retired RPVs (S. K. Iskander and J. T. Hutton)

This subtask will examine the issue of neutron-irradiation-induced damage attenuation through the RPV wall. The damage will be related to measurements of received dose, such as displacements per atom (dpa) through the wall. The HSSI program will obtain suitable-size trepans of materials from previously decommissioned RPVs, because these materials would incorporate conditions from actual operating reactors such as the effects of irradiation on stressed material. A sufficient number and size of trepans will be obtained to permit use of the MC approach to relate measures of damage to the fracture toughness. Specimens will be machined on the CNC milling machine located in Cell 6 of the IMET facility. Depending upon availability and appropriateness, trepans from the Japan Power Demonstration Reactor (JPDR) project, Trojan, and Maine Yankee RPVs may be examined.

(Milestone 4.1.2.B) The draft of the NUREG report: *Attenuation of Charpy Impact Toughness Through the Thickness of a JPDR Pressure Vessel Weldment*, by S. K. Iskander with major contributions from J. T. Hutton, L. E. Creech, M. Suzuki, K. Onizawa, E. T. Manneschildt, R. K. Nanstad, T. M. Rosseel, and P. S. Bishop, has been completed and submitted for internal technical review. A copy of the draft report was submitted to the NRC technical monitor, thereby fulfilling an NRC intermediate operational milestone.

Subtask 4.2: Reconstitution of Irradiated Toughness Specimens (S. K. Iskander)

Feasibility studies for reconstitution of CVN, PCVN, and 0.5T bend bar specimens will be prepared. To adequately survey the state-of-the-art capabilities, on-site evaluations of US and international facilities will be required. A letter report that includes the estimated costs of either using existing and available facilities or implementing a reconstitution facility at ORNL will be prepared at the completion of this task.

No work is currently funded in this subtask.

Subtask 4.3: Toughness Changes in Aged Stainless Steel Welds (R. K. Nanstad)

The purpose of this subtask is to evaluate the effects of irradiation and thermal aging on stainless-steel weld metals. Two projects are incorporated in this subtask. The first involves completion of fracture-toughness testing on irradiated stainless-steel weld-overlay cladding specimens at 288 °C to complete the testing of the matrix from the HSSI (L1089) 7th Irradiation Series. The PCVN specimens were irradiated in HSSI Capsule 10.06. The second project involves completion of a NUREG report on thermal aging of stainless-steel welds for nuclear piping, a project that began before the inception of the HSSI (L1098) Program and involved thermal aging at 343 °C for up to 50,000 hours.

(Milestone 4.3.B) The report, *The Effect of Aging at 343°C on the Microstructure and Mechanical Properties of Type 308 Stainless Steel Weldments*, by D. J. Alexander, K. B. Alexander, M. K. Miller, and R. K. Nanstad, NUREG/CR-6628 (ORNL/TM-13767), was submitted for publication to the NRC in July 1999.

Subtask 4.4: Foreign Interactions (R. K. Nanstad)

The purpose of this subtask is to provide technical support and continued collaboration for a number of cooperative relationships with foreign institutions in the area of radiation effects on RPV steels. Collaborative relationships may be developed during the course of this program and will be developed with the cognizance of NRC. Current relationships are:

1. U.S.-Russia Joint Coordinating Committee for Civilian Nuclear Reactor Safety (JCCCNRS) Working Group on Radiation Embrittlement and Aging of Components.
2. Cooperation with SCK-CEN in Belgium regarding the supply of well-characterized materials and comparison of test results, including dynamic PCVN testing for development of RPV testing standards.
3. Collaboration with AEA-Technology in the United Kingdom regarding fracture toughness testing of intergranular embrittlement of RPV HAZs.
4. Collaborative studies on fracture properties of high-copper RPV materials with Korean institutes such as KAERI.
5. Collaboration with institutes in the Czech Republic, Germany, and Finland on fracture toughness with small specimens in support of MC evaluations.
6. Collaboration with PSI in Switzerland on reirradiation.
7. Information and data exchange with all of the above and other countries, especially regarding RPV surveillance data and comparisons of fracture toughness and Charpy impact data.
8. Participation, including membership on the Executive Committee, in the International Group on Radiation Damage Mechanisms (IGRDM).
9. Participation in two coordinated research programs (CRPs) sponsored by the International Atomic Energy Agency (IAEA), informally designated CRP-5 and CRP-6. These CRPs will investigate the use of PCVN specimens to determine fracture toughness of RPV steels, and effects of nickel on irradiation-induced embrittlement of RPV steels, respectively.
10. Collaboration with NRI, Rez (Czech Republic) in the area of microstructural evolution in RPV steels as a consequence of irradiation, annealing, and reirradiation.
11. Collaboration with the University of Lille (France) in the area of primary radiation damage simulation.

(Milestone 4.4.B) No significant activity during this reporting period.

Subtask 4.5: Technical Assistance (R. K. Nanstad, S. K. Iskander, and M. A. Sokolov)

The purpose of this subtask is to provide special analytical, experimental, and administrative support to the NRC in resolving various regulatory issues related to irradiation effects. Specific identified activities are incorporated in this subtask, while other activities may be included through modification to the task by the NRC. The currently identified activities involve evaluation of the irradiated specimens contained in capsules previously irradiated at the University of Michigan FNR by Materials Engineering Associates (MEA), evaluation of highly irradiated high-nickel weld

surveillance specimens from the Palisades Reactor, evaluation of the effects of post-weld heat treatment (PWHT) on the copper solubility and fracture toughness of unirradiated RPV steels, and compilation of available materials at ORNL and elsewhere for studies of irradiation effects on RPV steels.

(Milestone 4.5.B) The letter report on RPV materials available for irradiation studies is in progress.

(Milestone 4.5.F) Testing of unirradiated specimens has continued with the high-copper weld given varying time/temperature postweld heat treatments. A Charpy impact energy versus temperature curve has been obtained for each condition to evaluate toughness as a function of PWHT. If funding can be realized, atom probe tomography will be used to determine the matrix copper contribution as a function of PWHT. A presentation of progress on this study was made at the IGRDM meeting in September in Leuven, Belgium. A letter report will be prepared following completion of all testing and evaluation. Abstracts are being prepared for offers of presentations at various meetings in 2001.

Task 5: Modeling & Microstructural Analysis (R. E. Stoller)

This task shall determine the microstructural basis for radiation-induced property changes in RPV materials to aid in understanding and applying the experimental results obtained in Tasks 2 through 4. The subtasks comprise two major components: (1) theoretical modeling and data analysis, and (2) experimental investigations. The modeling work focuses on the development of an improved description of primary-damage formation in irradiated materials, and the further development and use of predictive models of radiation-induced microstructural evolution and its impact on the mechanical behavior of RPV materials. The experimental component consists of special-purpose irradiation experiments to isolate particular irradiation variables (neutron-flux level and energy spectrum), and detailed microstructural characterization of RPV materials in relevant conditions using atom probe and transmission electron microscopy techniques. These conditions include: long-term, thermally-aged, irradiated, post-irradiation mitigation (IA), and reirradiated (IAR). The information obtained from the experiments and microstructural characterization will be used to support validation of the theoretical models. Further model verification will be carried out through extensive use of the commercial-reactor surveillance data and test-reactor data contained in the NRC-funded Embrittlement Database (EDB), and data generated in other experiments coordinated by this task.

The major areas of inquiry will be: (a) the effects of chemical composition, (b) the role of displacement rate (neutron flux level), (c) the impact of differences in neutron-energy spectrum, (d) potential differences in hardening and embrittlement behavior at very high fluence, and (e) the response of materials that are reirradiated following a post-irradiation mitigation. Damage modeling will also address such questions as attenuation through the RPV wall. The overall goal of the task is to provide an embrittlement model that can be used in a predictive way to anticipate the response of RPV materials at high fluences near or slightly beyond their nominal end-of-life, and to provide support to the NRC for related safety or licensing questions. The tools developed in this task will also be used to support the analysis of experimental results obtained in other program tasks. Both the modeling and experimental research will be coordinated with complementary activities carried out by other NRC contractors.

Subtask 5.1: Modeling of Damage Evolution (R. E. Stoller)

The modeling and analysis work will include completion of the development required to incorporate alloying effects in the embrittlement model. Additional thermodynamic components are needed to account for chemical effects, particularly for the simulation of high-fluence effects and thermal mitigation. Enhancements to the code used for simulating displacement cascades will permit the investigation of the effects of alloying elements on primary damage formation.

(Milestone 5.1.A) The NUREG report entitled "Evaluation of Neutron Energy Spectrum Effects Based on Primary Damage Simulations in Iron," NUREG/CR-6670, (ORNL/TM-1999/334) was submitted to the NRC in July.

Subtask 5.2: Microstructural Analysis (R. E. Stoller and M. K. Miller)

Round-Robin studies, using atom probe field-ion microscopy (APFIM), small angle neutron scattering (SANS), and field-emission scanning transmission electron microscopy (FEGSTEM), will be coordinated to resolve the inconsistencies between these techniques that have been used to determine the matrix copper content and the chemical composition of radiation-induced precipitates in RPV materials. Additionally, APFIM characterization will be used to determine whether additional radiation-induced phases are forming.

(Milestone 5.2.A). With the incorporation of atom probe tomography results on weld 73W specimens the NUREG report entitled, "Effect of Reirradiation Rate on The Charpy Properties of an Irradiated/Annealed High Copper Reactor Pressure Vessel Weld HSSI 73W," is under going final revisions before preparation for submission to the NRC.

The NUREG report entitled, "Atom Probe Tomography Characterization of the Solute Distributions in a Neutron-Irradiated and Annealed Pressure Vessel Steel Weld", NUREG/CR-6629, (ORNL/TM-13768), was submitted to the NRC in September 1999.

Subtask 5.3: Experimental Verification of Neutron Flux and Energy Spectrum Effects
(R. E. Stoller)

An experimental examination of neutron-flux level (displacement rate) and neutron energy spectrum effects (thermal-to-fast-flux ratio) will be conducted in collaboration with other NRC contractors.

No significant activity occurred in this subtask during this reporting period.

Task 6: Test Reactor Irradiation Coordination (K. R. Thoms)

This task provides the support required to supply and coordinate irradiation services needed by NRC contractors, such as the UCSB and the ORNL HSSI Program at the University of Michigan FNR. These services include the design and assembly of irradiation facilities (and/or capsules), as well as arranging for their exposure, periodic monitoring by remote computer access and interaction with the FNR staff, and return of specimens to the originating research organization.

Subtask 6.1: Operate the HSSI Irradiation (IAR) Facility (K. R. Thoms and D. W. Heatherly)

With the fabrication, installation, and initial testing of the HSSI IAR facility at the University of Michigan FNR completed as part of the previous (L1098) HSSI program, the activities associated with the new program include supervising the irradiation of the reusable irradiation capsules in the dual-capsule irradiation facility at FNR. A NUREG report on the design, assembly, installation, and operation of the HSSI IAR facility will be prepared.

(Milestone 6.1.A) Irradiation of the ORNL specimens in the HSSI-IAR 1 and 2 irradiation facilities continued during this reporting period.

The HSSI-IAR irradiation facilities continue to operate without incident following performance of annual maintenance and calibration of the facilities in late September. During this reporting period, the HSSI-IAR facilities were irradiated for 10 days during reactor half-cycle 451B, 6.9 days during

half-cycle 452A, and the first 2.2 days of half-cycle 452B. Reactor half-cycle 451B was shortened to only 6.9 days due to the Thanksgiving holiday.

During the 10 days of reactor half-cycle 451B, the IAR irradiation facilities received a total of 241 EFPH (effective full power hours). During the holiday shortened 6.9 days of reactor half-cycle 452A, the facilities received a total of 165 EFPH. The facilities received an additional 54 EFPH during the first 2.2 days of reactor half cycle 452B. During this reporting period, the HSSI-IAR irradiation facilities received a total of 460 EFPH.

At the beginning of this reporting period, the second group of specimens to be irradiated in the new IAR facilities had been irradiated for a total of 3,826 EFPH. At the end of this reporting period the second group of specimens had been irradiated for a total of 4286 EFPH. The facilities themselves had been in service for a total of 8,614 EFPH.

(Milestone 6.1.B) The draft NUREG report on the reusable irradiation facilities was delayed in order to evaluate other test reactor options as substitutes for the FNR.

Subtask 6.2: Operate the HSSI/UCSB Irradiation Facility (K. R. Thoms and D. W. Heatherly)

This subtask includes supervising the overall operation and providing assistance to the reactor personnel in the routine operation and maintenance of the HSSI/UCSB irradiation facility. A NUREG report on the design, assembly, installation, and operation of the UCSB facility will be prepared.

(Milestone 6.2.A) Irradiation of the UCSB specimens in the HSSI-UCSB irradiation facility continued during this reporting period.

The HSSI-UCSB irradiation facility continued to operate without incident following performance of annual maintenance and calibration of the facility in late September. During this reporting period the HSSI-UCSB facility was irradiated for 10 days during reactor half-cycle 451B, 6.9 days during half-cycle 452A, and the first 2.2 days of half-cycle 452B. Reactor half-cycle 451B was shortened to only 6.9 days due to the Thanksgiving holiday.

During the 10 days of reactor half-cycle 451B, the HSSI-UCSB irradiation facility received a total of 241 EFPH (effective full power hours). During the holiday shortened 6.9 days of reactor half-cycle 452A, the facility received a total of 165 EFPH. The facility received an additional 54 EFPH during the first 2.2 days of reactor half cycle 452B. During this reporting period, the HSSI-UCSB irradiation facility received a total of 460 EFPH.

At the beginning of this reporting period, the HSSI-UCSB facility and original specimen compliment had been irradiated for a total of 15,639 EFPH. At the end of this reporting period, the HSSI-UCSB facility and original specimen compliment had been irradiated for a total of 16,099 EFPH. The latest irradiation plan received from the UCSB experimenters indicated that the final specimens would be removed from the UCSB facility after 13,500 EFPH. Additional specimen irradiations have been added to the original plan and, at the end of this reporting period, the UCSB irradiation program had obtained 119% of the original desired irradiation time.

Task 7: Embrittlement Data Base and Dosimetry Evaluation (T. M. Rosseel)

This task was until March 1, 1999, the Embrittlement Data Base (EDB) and Dosimetry Evaluation Program, JCN: 6164. The objectives of the two subtasks listed below have been reduced but the focus remains the same. Nuclear radiation embrittlement information from radiation embrittlement research on nuclear RPV steels and from power-reactor surveillance reports will be maintained in a data base to be published on a periodic basis. The information will assist the Office of Nuclear

Reactor Regulation and the Office of Nuclear Regulatory Research to effectively monitor current procedures and data bases used by vendors, utilities, and service laboratories in the pressure vessel irradiation surveillance program. It will also provide technical expertise and analysis to the NRC regarding dosimetry and transport calculations and methodologies.

Subtask 7.1: Embrittlement Data Base (J.-A. Wang)

The purpose of the subtask is to maintain and update the EDB. This includes evaluating surveillance reports, entering the data into the EDB, and providing an update to the NRC by the end of the fiscal year.

(Milestone 7.1.B) The completed UPDATE-11 of PR-EDB was transmitted to the US NRC technical program monitor in July.

Subtask 7.2: Dosimetry Evaluation (I. Remec)

Technical expertise and analysis regarding dosimetry and transport calculations and methodologies will be provided as needed to the US NRC. Specifically, work will be performed to complete the review of, and hold final discussions with the NRC concerning, the dosimetry guide, DG-1053.

This activity was eliminated as directed by SOEW 60-99-356.

3. MEETINGS AND TRIPS:

On November 11-15, M. A. Sokolov traveled to Orlando, Florida, to chair the E08.08.03 Task Group and participate in ASTM E08 Committee Week meetings.

On November 20, Dr. Marc Scibetta of SCK-CEN, Mol, Belgium, visited ORNL to meet with HSSI staff members concerning RPV steels.

4. PRESENTATIONS, REPORTS, PAPERS, AND PUBLICATIONS:

The draft NUREG report, *Attenuation of Charpy Impact Toughness Through the Thickness of a JPDR Pressure Vessel Weldment*, by S. K. Iskander et al., was transmitted to the NRC, fulfilling an NRC Intermediate Operational Milestone.

5. PROPERTY ACQUIRED:

Items listed in this section include all nonconsumable project purchases that were actually paid for during this reporting period. They do not include either accruals or accrual reversals and hence may not accurately reflect total material procurement charges within this period.

Item

Cost (\$)

None

6. PROBLEM AREAS:

The University of Michigan, Phoenix Memorial Laboratory informed the HSSI Program manager that due to new University requirements to obtain full-cost recovery for the operation of the Ford Nuclear Reactor (FNR), the cost of FNR services could double or even triple beginning in January.

Funds have been received from NRC to install the servo-hydraulic machine in the hot cell. A schedule has been established by the hot cell staff, work has begun, and is expected to be completed in mid-December. This issue has caused a delay in completion of the fracture toughness testing of the highly embrittled KS-01 1T compact specimens to examine shape of the master curve for highly embrittled RPV material.

Unexpected reductions in DOE programmatic support for the IMET hot cell facility may result in limited operations during FY 2001.

7. PLANS FOR THE NEXT REPORTING PERIOD:

The plans for the next reporting period are described in Section 2.

FINANCIAL STATUS
for W6953

Reporting Period: 10/22/00-11/26/00

	Current Month	Fiscal Year to Date	Cumulative Project to date
I. Direct Staff Effort	10 MM	1.5 MY	31.3 MY
II. A. Direct Lab Staff Effort (\$)			
Direct Salaries	70,379	117,671	3,133,376
Materials and Services	770	-113	375,843
ADP Support	61	122	1,907
Subcontracts	6,553	13,106	375,524
Travel	5,305	9,397	126,006
Indirect Labor Costs	0	0	0
Other: NRC-PO Tax	0	0	138,500
General and Administrative	29,795	49,844	1,429,066
 Total UT-Battelle Costs	 112,863	 190,027	 5,580,222
B. DOE Federal Access Costs	8,738	8,738	8,738
 TOTAL PROJECT COSTS	 121,601	 198,765	 5,588,960
 Percentage of available cumulative funds costed		94	
Percentage of available current FY funds costed		34	
Funds Remaining		381,040	
Commitments:		19,846	
BA Remaining		361,194	

III. Funding Status

Prior FY Carryover	FY 01 Projected Funding Level	FY 01 Funds Received to Date	FY 00 Funding Balance Needed	Cumulative Amt. Obligated	Cumulative Amt. Costed
279,802	1,450,000	300,000	1,150,000	5,970,000	5,588,960

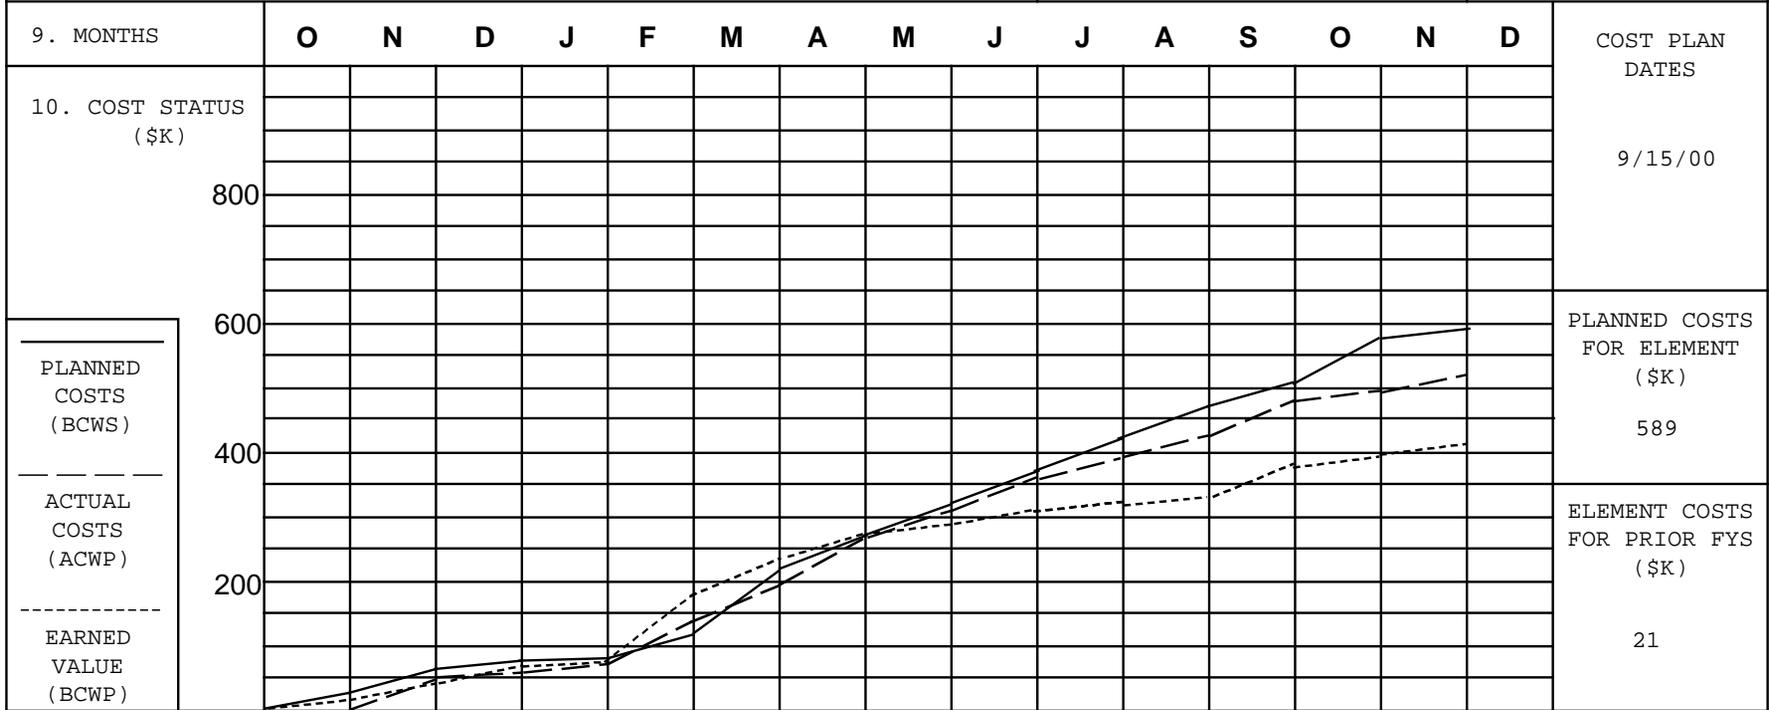
Comments: Federal Access Charge for FY 00 carryover will appear next month

1. CONTRACT REPORTING ELEMENT HSSI - Heavy-Section Steel Irradiation Program										2. REPORTING PERIOD 10/23/00 - 11/26/00					3. JCN NO. W6953						
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831										5. CONTRACT PERIOD FY 1999-2001					6. ACTIVITY NUMBER 41 W6 95 3W 1						
										7. NRC B&R NO. 860 15 21 20 05					8. DOE B&R NO. 40 10 01 06						
9. MONTHS		O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	COST PLAN DATES				
10. COST STATUS (\$K)																	9/15/00				
PLANNED COSTS (BCWS)																	PLANNED COSTS FOR ELEMENT (\$K)				
ACTUAL COSTS (ACWP)																	1,966				
EARNED VALUE (BCWP)																	ELEMENT COSTS FOR PRIOR FYS (\$K)				
																	306				
ACCRUED COSTS (\$K)	PLANNED	168	156	99	115	118	166	163	166	172	142	132	150	150	69						
	ACTUAL	113	207	29	149	153	159	137	147	144	95	107	247	77	113						
	EARNED	140	157	104	107	172	139	137	112	122	101	119	120	76	87						
	CUM. PLAN.	168	324	423	538	656	822	985	1151	1323	1465	1597	1747	1897	1966						
	CUM. ACT.	113	320	349	498	651	810	947	1094	1238	1333	1440	1687	1764	1877						
	CUM. EARN.	177	334	434	508	680	819	956	1068	1190	1291	1410	1530	1606	1693						
11. REMARKS:																					

1. CONTRACT REPORTING ELEMENT HSSI - 1. Program Management										2. REPORTING PERIOD 10/23/00 - 11/26/00					3. JCN NO. W6953						
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831										5. CONTRACT PERIOD FY 1999-2001					6. ACTIVITY NUMBER 41 W6 95 3W 1						
										7. NRC B&R NO. 860 15 21 20 05					8. DOE B&R NO. 40 10 01 06						
9. MONTHS		O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	COST PLAN DATES				
10. COST STATUS (\$K)																	9/15/00				
PLANNED COSTS (BCWS)																	PLANNED COSTS FOR ELEMENT (\$K)				
ACTUAL COSTS (ACWP)																	229				
EARNED VALUE (BCWP)																	ELEMENT COSTS FOR PRIOR FYS (\$K)				
																	29				
ACCRUED COSTS (\$K)	PLANNED	18	25	21	17	13	11	12	13	15	12	14	25	18	15						
	ACTUAL	18	37	20	17	21	19	25	15	16	11	13	12	4	10						
	EARNED	18	24	23	14	18	13	14	12	15	13	17	13	5	9						
	CUM. PLAN.	18	43	64	81	94	105	117	130	145	157	171	196	214	229						
	CUM. ACT.	18	55	75	92	113	132	157	172	188	199	212	223	227	237						
	CUM. EARN.	18	42	65	79	97	110	124	136	151	164	181	194	199	208						

11. REMARKS:

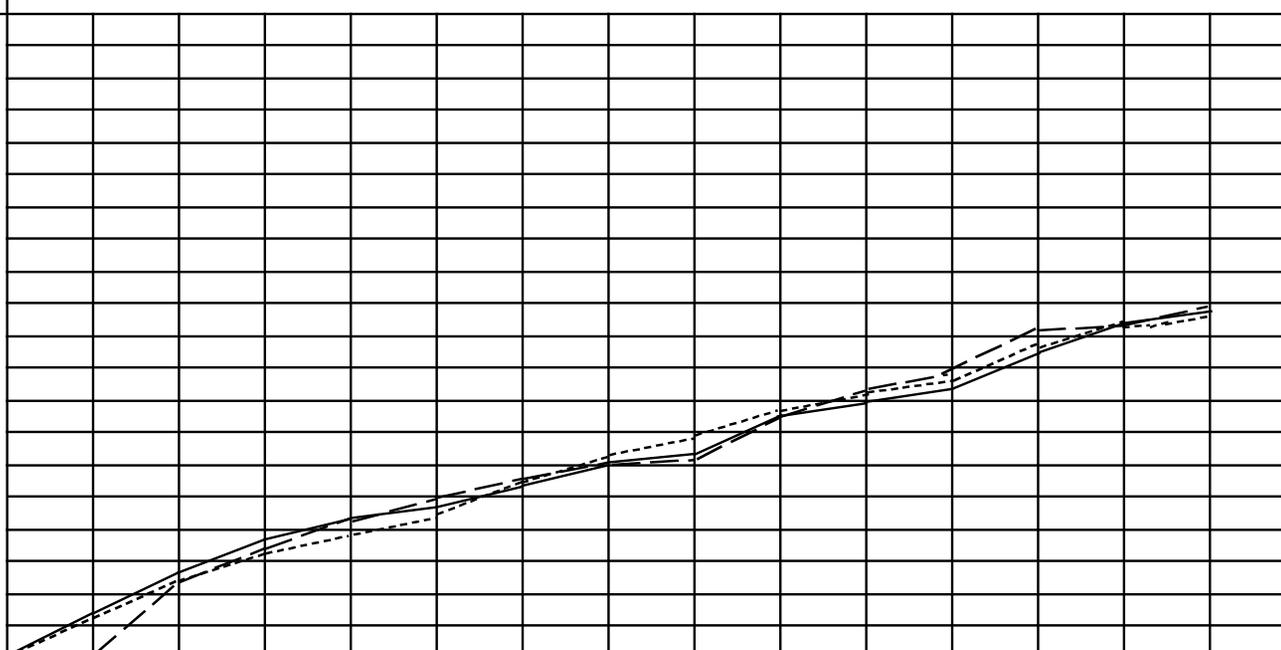
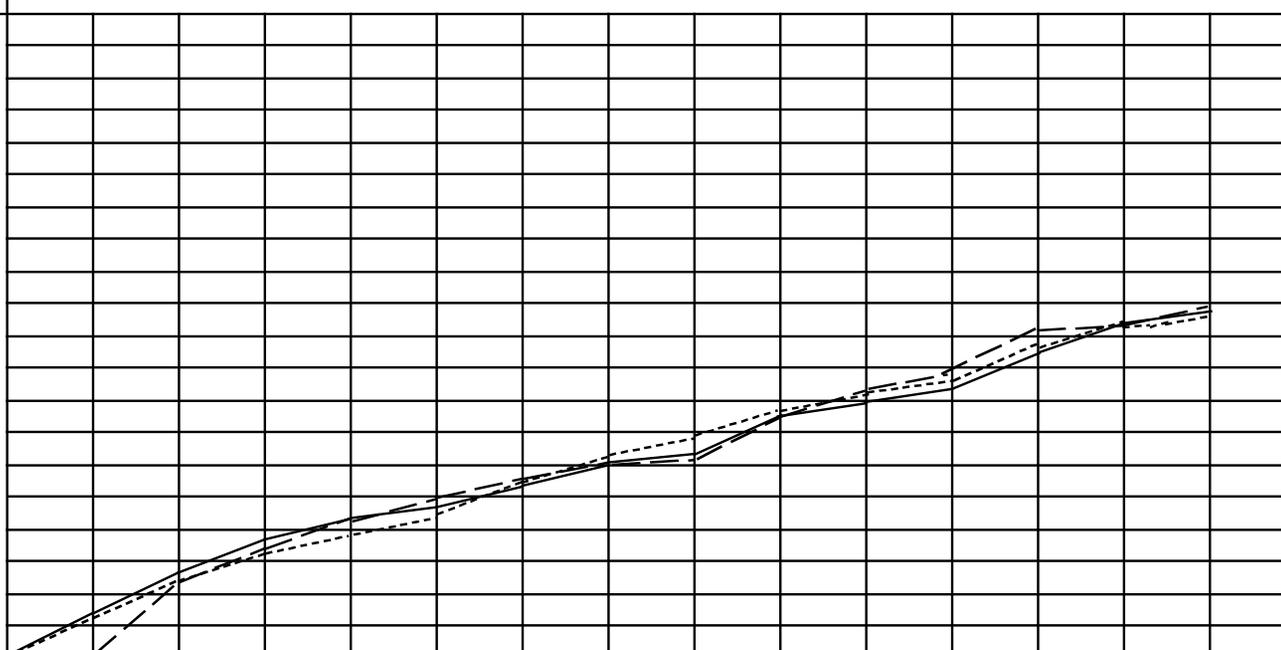
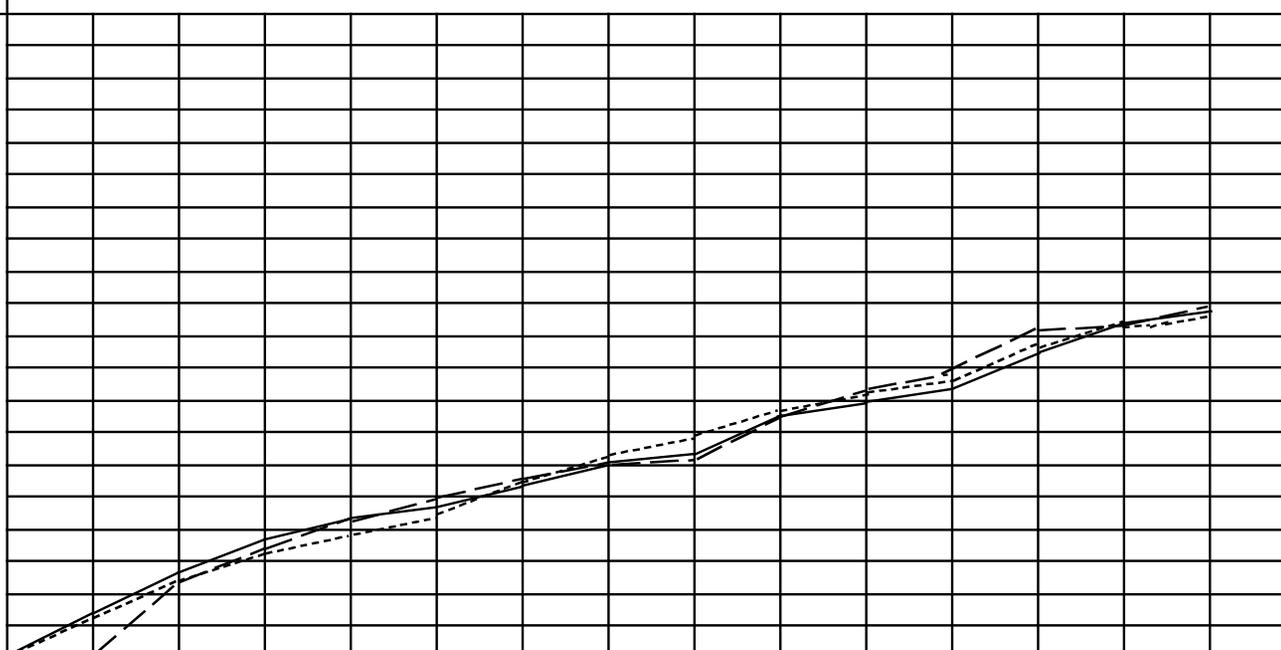
1. CONTRACT REPORTING ELEMENT HSSI - 2. Fracture Toughness Transition and MC Methodology	2. REPORTING PERIOD 10/23/00 - 11/26/00	3. JCN NO. W6953
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831	5. CONTRACT PERIOD FY 1999-2001	6. ACTIVITY NUMBER 41 W6 95 3W 1
	7. NRC B&R NO. 860 15 21 20 05	8. DOE B&R NO. 40 10 01 06



ACCRUED COSTS (\$K)	PLANNED	29	25	14	20	36	80	57	55	47	52	45	44	70	15
	ACTUAL	-18	43	14	50	53	53	63	51	44	29	43	51	20	33
	EARNED	24	24	11	26	89	59	36	20	18	13	23	30	13	17
	CUM. PLAN.	29	54	68	88	124	204	261	316	363	415	460	504	574	589
	CUM. ACT.	-18	25	39	89	142	195	258	309	353	382	425	476	496	529
CUM. EARN.	24	48	59	87	174	233	269	289	307	320	343	373	386	403	

11. REMARKS:





1. CONTRACT REPORTING ELEMENT HSSI - 3. Irradiation Embrittlement of RPV Steel										2. REPORTING PERIOD 10/23/00 - 11/26/00					3. JCN NO. W6953						
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831										5. CONTRACT PERIOD FY 1999-2001					6. ACTIVITY NUMBER 41 W6 95 3W 1						
										7. NRC B&R NO. 860 15 21 20 05					8. DOE B&R NO. 40 10 01 06						
9. MONTHS		O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	COST PLAN DATES				
10. COST STATUS (\$K)																	1/31/00				
PLANNED COSTS (BCWS)																	PLANNED COSTS FOR ELEMENT (\$K) 552				
ACTUAL COSTS (ACWP)																	ELEMENT COSTS FOR PRIOR FYS (\$K) 167				
EARNED VALUE (BCWP)																					
ACCRUED COSTS (\$K)	PLANNED	52	43	30	41	35	42	46	52	51	41	41	32	24	22						
	ACTUAL	92	31	-50	48	28	62	17	32	35	20	25	115	32	26						
	EARNED	48	42	29	33	28	33	38	40	41	40	47	38	20	34						
	CUM. PLAN.	52	95	125	166	201	243	289	341	392	433	474	506	530	552						
	CUM. ACT.	92	123	73	121	149	211	228	260	295	315	340	455	487	513						
	CUM. EARN.	48	90	119	152	180	213	251	291	332	372	419	457	486	520						
11. REMARKS:																					

1. CONTRACT REPORTING ELEMENT HSSI - 4. Validation of Irradiated and Aged Materials										2. REPORTING PERIOD 10/23/00 - 11/26/00					3. JCN NO. W6953				
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831										5. CONTRACT PERIOD FY 1999-2001					6. ACTIVITY NUMBER 41 W6 95 3W 1				
										7. NRC B&R NO. 860 15 21 20 05					8. DOE B&R NO. 40 10 01 06				
9. MONTHS		O N D J F M A M J J A S O N D														COST PLAN DATES			
10. COST STATUS (\$K)																1/31/00			
PLANNED COSTS (BCWS)																PLANNED COSTS FOR ELEMENT (\$K)			
ACTUAL COSTS (ACWP)																ELEMENT COSTS FOR PRIOR FYS (\$K)			
EARNED VALUE (BCWP)																30			
ACCRUED COSTS (\$K)	PLANNED	35	37	20	15	11	12	20	15	18	17	13	23	22	14				
	ACTUAL	1	57	29	20	17	13	14	11	26	29	17	20	2	18				
	EARNED	30	31	23	14	15	18	23	14	18	20	18	23	11	10				
	CUM. PLAN.	35	72	92	107	118	130	150	165	183	200	213	236	258	272				
	CUM. ACT.	1	58	87	107	124	137	151	162	188	217	234	254	256	274				
	CUM. EARN.	30	61	84	98	113	131	154	168	186	206	224	247	258	268				
11. REMARKS:																			

1. CONTRACT REPORTING ELEMENT HSSI - 5. Modeling and Microstructural Analysis										2. REPORTING PERIOD 10/23/00 - 11/26/00					3. JCN NO. W6953				
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831										5. CONTRACT PERIOD FY 1999-2001					6. ACTIVITY NUMBER 41 W6 95 3W 1				
										7. NRC B&R NO. 860 15 21 20 05					8. DOE B&R NO. 40 10 01 06				
9. MONTHS		O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	COST PLAN DATES		
10. COST STATUS (\$K)																		1/4/00	
PLANNED COSTS (BCWS)																		PLANNED COSTS FOR ELEMENT (\$K)	
																		102	
ACTUAL COSTS (ACWP)																		ELEMENT COSTS FOR PRIOR FYS (\$K)	
																		42	
EARNED VALUE (BCWP)																			
ACCRUED COSTS (\$K)	PLANNED	20	15	5	12	13	5	3	3	6	4	3	5	5	3				
	ACTUAL	4	29	7	5	24	5	6	10	8	1	1	0	0	0				
	EARNED	5	25	9	9	10	4	7	7	8	3	5	2	0	0				
	CUM. PLAN.	20	35	40	52	65	70	73	76	82	86	89	94	99	102				
	CUM. ACT.	4	33	40	45	69	74	80	90	98	99	100	100	100	100				
	CUM. EARN.	5	30	39	48	58	62	69	75	84	87	92	94	94	94				
11. REMARKS:																			

1. CONTRACT REPORTING ELEMENT HSSI - 6. Irradiation Coordination										2. REPORTING PERIOD 10/23/00 - 11/26/00					3. JCN NO. W6953						
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831										5. CONTRACT PERIOD FY 1999-2001					6. ACTIVITY NUMBER 41 W6 95 3W 1						
										7. NRC B&R NO. 860 15 21 20 05					8. DOE B&R NO. 40 10 01 06						
9. MONTHS		O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	COST PLAN DATES				
10. COST STATUS (\$K)																	1/4/00				
PLANNED COSTS (BCWS)																	PLANNED COSTS FOR ELEMENT (\$K)				
																	187				
ACTUAL COSTS (ACWP)																	ELEMENT COSTS FOR PRIOR FYS (\$K)				
																	17				
EARNED VALUE (BCWP)																					
ACCRUED COSTS (\$K)	PLANNED	10	9	10	10	10	15	20	23	30	11	11	11	11	0						
	ACTUAL	16	9	9	9	10	7	4	16	8	3	9	11	19	26						
	EARNED	15	10	9	11	12	12	11	11	13	12	13	16	18	16						
	CUM. PLAN.	16	25	35	45	55	70	90	113	143	154	165	176	187	187						
	CUM. ACT.	16	25	34	43	53	60	64	80	88	91	100	149	168	194						
	CUM. EARN.	15	25	34	45	57	69	80	91	104	116	129	145	163	179						
11. REMARKS:																					

Milestone Symbology

	Intermediate milestone planned
	Intermediate milestone completed
	Major milestone planned
	Major milestone completed
	Rescheduled milestone planned
	Rescheduled milestone completed

n = number of calendar-year month in which milestone was rescheduled

1. CONTRACT REPORTING ELEMENT HSSI - 1. Program Management		2. REPORTING PERIOD 10/23/00 - 11/26/00		3. JCN NO. W6953																				
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831		5. CONTRACT PERIOD FY 1998-2001		6. ACTIVITY NO. 41 W6 95 3W 1																				
		7. NRC B&R NO. 860 15 21 20 05		8. DOE B&R NO. 40 10 01 06																				
9. MILESTONE IDEN. NO.	10. MILESTONE DESCRIPTION	FY 1998		FY 1999				FY 2000				FY 2001												
		Q3	Q4	Q1	Q2	Q3	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D
1. 1. A.	Issue Project & Budget Proposal		▲	◆ ⁹	◆ ¹	◆ ²	◆ ³	▲													▲	◆ ⁹	◆ ¹⁰	
1. 1. B.	Select and Administer Subcontracts	▼						▼																
1. 2. A.	Issue Earned Value Based Monthly Management Reports (by the end of subsequent month)																							
1. 2. B.	Ensure QA Requirements are met																							
1. 3. A.	Participate in Appropriate Codes and Standards Committees																							
1. 3. B.	Participate in NRC-Sponsored Meetings and Discussions		▼																		▼	◆ ⁸		
1. 3. C.	Coordinate NRC and Internal Reviews																							
1. 3. D.	Coordinate Domestic and Foreign Information Exchange as Approved by NRC-RES																							
1. 3. E.	Coordinate HSSI Letter and NUREG Reports																							
1. 3. F.	Document the Historical Information Generated by the Old HSSI Program																				▼	▲	◆ ¹⁰	
11. REMARKS																								

1. CONTRACT REPORTING ELEMENT HSSI - 2. Fracture Toughness Transition & MC Methodology		2. REPORTING PERIOD 10/23/00 - 11/26/00		3. JCN NO. W6953																					
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831		5. CONTRACT PERIOD FY 1998-2001		6. ACTIVITY NO. 41 W6 95 3W 1																					
		7. NRC B&R NO. 860 15 21 20 05		8. DOE B&R NO. 40 10 01 06																					
9. MILESTONE IDEN. NO.	10. MILESTONE DESCRIPTION	FY 1998		FY 1999				FY 2000				FY 2001													
		Q3	Q4	Q1	Q2	Q3	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	
2. 6. B.	Age & Evaluate by CVN	█		▼																					
2. 6. C.	Machine C(T)s and Test	█		▼																					
2. 6. D.	MC Impact Evaluations	█		▼																					
2. 6. E.	Reports and Administration	█		█										◊	10										
2. 7. A.	Complete Fabrication and Preliminary Testing of Subsize Specimen					█				▼	◊	7	◆	2											
2. 7. B.	Complete Testing of Subsize Specimens												█		▼										
2. 7. C.	Complete NUREG Report on Results of Subsize Specimen Fracture Toughness Tests																				█		▲		
2. 7. D.	Fabricate A302B PCVNs from 3 Heats																								
2. 7. E.	Test and Analyze																								
2. 7. F.	Prepare Letter Report																								
11. REMARKS																									

1. CONTRACT REPORTING ELEMENT HSSI - 2. Fracture Toughness Transition & MC Methodology			2. REPORTING PERIOD 10/23/00 - 11/26/00			3. JCN NO. W6953																			
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831			5. CONTRACT PERIOD FY 1998-2001			6. ACTIVITY NO. 41 W6 95 3W 1																			
			7. NRC B&R NO. 860 15 21 20 05			8. DOE B&R NO. 40 10 01 06																			
9. MILESTONE IDEN. NO.	10. MILESTONE DESCRIPTION	FY 1998		FY 1999					FY 2000					FY 2001											
		Q3	Q4	Q1	Q2	Q3	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	
2. 8. A.	Complete Plan for Assembly and Compilation of Surrogate Materials Data Base	█																							
2. 8. B.	Complete Assembly and Compilation for Unirradiated Materials		█																						
2. 8. C.	Complete Statistical Analyses of Data Base for Unirradiated Materials				█																				
2. 8. D.	Complete Draft NUREG Report on Guidelines for use of Surrogate Materials to Establish									█															
2. 8. E.	Complete Assembly and Compilation for Irradiated Materials										█														
2. 8. F.	Complete Statistical Analysis of Data Base for Irradiated materials																								
11. REMARKS																									

1. CONTRACT REPORTING ELEMENT HSSI - 3. Irradiation Embrittlement of RPV Steel		2. REPORTING PERIOD 10/23/00 - 11/26/00		3. JCN NO. W6953																				
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831		5. CONTRACT PERIOD FY 1998-2001		6. ACTIVITY NO. 41 W6 95 3W 1																				
		7. NRC B&R NO. 860 15 21 20 05		8. DOE B&R NO. 40 10 01 06																				
9. MILESTONE IDEN. NO.	10. MILESTONE DESCRIPTION	FY 1998		FY 1999					FY 2000					FY 2001										
		Q3	Q4	Q1	Q2	Q3	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D
3. 1. A.	Age HAZ Materials	▽ ◆ ⁶																						
3. 1. B.	Machine CVN Specimens		▼																					
3. 1. C.	Evaluate Results and Prepare Letter Report			▬																				
3. 1. D.	Irradiate Capsules																							
3. 1. E.	Ship Specimens																							
3. 1. F.	Test Specimens																							
3. 1. G.	NUREG Report																							
3. 2. A.	NUREG on IA Work to Date																							
3. 2. B.	Dosimetry of 30 CVNs		▽	▬																				
3. 2. C.	NUREG on 30 CVNs (IAR)																							
3. 2. D.	Test Plan for Critical Materials																							
3. 2. E.	IAR of Critical Materials																							
11. REMARKS																								

1. CONTRACT REPORTING ELEMENT HSSI - 3. Irradiation Embrittlement of RPV Steel				2. REPORTING PERIOD 10/23/00 - 11/26/00				3. JCN NO. W6953																	
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831				5. CONTRACT PERIOD FY 1998-2001				6. ACTIVITY NO. 41 W6 95 3W 1																	
				7. NRC B&R NO. 860 15 21 20 05				8. DOE B&R NO. 40 10 01 06																	
9. MILESTONE IDEN. NO.	10. MILESTONE DESCRIPTION	FY 1998		FY 1999					FY 2000					FY 2001											
		Q3	Q4	Q1	Q2	Q3	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	
3.3.A.	Ship JRQ Specimens From PSI to ORNL											▽	◇ ⁹	◇ ¹⁰											
3.3.B.	Complete Test Plan											▽	◇ ⁹	◇ ¹¹											
3.3.C.	Complete JRQ Specimen Testing																								
3.3.D.	Complete Draft NUREG Report on IAR Results of JRQ																								
11. REMARKS																									

1. CONTRACT REPORTING ELEMENT HSSI - 4. Validation of Irradiated and Aged Materials				2. REPORTING PERIOD 10/23/00 - 11/26/00				3. JCN NO. W6953																	
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831				5. CONTRACT PERIOD FY 1998-2001				6. ACTIVITY NO. 41 W6 95 3W 1																	
				7. NRC B&R NO. 860 15 21 20 05				8. DOE B&R NO. 40 10 01 06																	
9. MILESTONE IDEN. NO.	10. MILESTONE DESCRIPTION	FY 1998		FY 1999					FY 2000					FY 2001											
		Q3	Q4	Q1	Q2	Q3	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	
4. 1. 1. A.	JPDR Information Exchange with JAERI	[Gantt bar spanning from Q3 FY 1998 to Q4 FY 2000]																							
4. 1. 1. B.	Machining & Inspection of JPDR	[Gantt bar spanning from Q3 FY 1998 to Q3 FY 1999]																							
4. 1. 1. C.	Testing, Letter & NUREG Report	[Gantt bar spanning from Q4 FY 1998 to Q4 FY 2000]																							
4. 1. 3	Maine Yankee RPV Feasibility Study	[Gantt bar spanning from Q3 FY 1999 to Q4 FY 2000]																							
4. 3. B.	Complete Draft NUREG Report on Thermal Aging of SS Welds	[Gantt bar spanning from Q3 FY 1998 to Q3 FY 1999]																							
4. 4. A.	Complete Preparation of List of Anticipated Foreign Travel	[Gantt bar spanning from Q3 FY 1998 to Q4 FY 2000]																							
4. 4. B.	Participate in Periodic Meetings of IGRDM	[Gantt bar spanning from Q1 FY 1999 to Q4 FY 2000]																							
4. 4. C.	Complete Progress Reports of Collaboration Activities	[Gantt bar spanning from Q3 FY 1998 to Q4 FY 2000]																							
11. REMARKS																									

1. CONTRACT REPORTING ELEMENT HSSI - 4. Validation of Irradiated and Aged Materials				2. REPORTING PERIOD 10/23/00 - 11/26/00				3. JCN NO. W6953																
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831				5. CONTRACT PERIOD FY 1998-2001				6. ACTIVITY NO. 41 W6 95 3W 1																
				7. NRC B&R NO. 860 15 21 20 05				8. DOE B&R NO. 40 10 01 06																
9. MILESTONE IDEN. NO.	10. MILESTONE DESCRIPTION	FY 1998		FY 1999					FY 2000					FY 2001										
		Q3	Q4	Q1	Q2	Q3	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D
4.5.A.	Complete Plans for Testing of Specimens in MEA Capsule, Procurement and Testing of Palisades Capsule & Evaluation of PWHT Sheets	■																						
4.5.B.	Complete Letter Report Regarding RPV Materials Available for Irradiation Study				▲	◆ ¹²	◆ ⁴						◆ ¹¹	◆ ¹						◆ ⁵				
4.5.D.	Complete Letter Report on Test results From MEA Capsule						▲					◆ ⁷	◆ ¹¹							◆ ¹				◆ ⁵
11. REMARKS																								

1. CONTRACT REPORTING ELEMENT HSSI - 5. Modeling & Microstructural Analysis				2. REPORTING PERIOD 10/23/00 - 11/26/00				3. JCN NO. W6953																	
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831				5. CONTRACT PERIOD FY 1998-2001				6. ACTIVITY NO. 41 W6 95 3W 1																	
				7. NRC B&R NO. 860 15 21 20 05				8. DOE B&R NO. 40 10 01 06																	
9. MILESTONE IDEN. NO.	10. MILESTONE DESCRIPTION	FY 1998		FY 1999					FY 2000					FY 2001											
		Q3	Q4	Q1	Q2	Q3	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	
5. 1. A.	Development and Predictive use of Embrittlement Model				▽	◇ ¹																			△
5. 1. B.	Model Validation and Data Analysis																								
5. 2. A.	Coordinate and Analyze APFIM/SANS/FEGSTEM Round Robin Experiment			△																					◇ ¹
5. 2. B.	APFIM Characterization				△	◇ ¹																			◇ ⁵
5. 3. A.	Conduct and Coordinate Experiments in HFIR HFBR, and FNR			▽																					
5. 3. B.	High-Flux Irradiation-Annealing-Reirradiation in HFIR																								
5. 4	Administration of Task Activities		▽																						▽
11. REMARKS																									

1. CONTRACT REPORTING ELEMENT HSSI - 6. Irradiation Coordination				2. REPORTING PERIOD 10/23/00 - 11/26/00				3. JCN NO. W6953																	
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831				5. CONTRACT PERIOD FY 1998-2001				6. ACTIVITY NO. 41 W6 95 3W 1																	
				7. NRC B&R NO. 860 15 21 20 05				8. DOE B&R NO. 40 10 01 06																	
9. MILESTONE IDEN. NO.	10. MILESTONE DESCRIPTION	FY 1998		FY 1999					FY 2000					FY 2001											
		Q3	Q4	Q1	Q2	Q3	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	
6. 1. A.	Coordinate the Operation, Data Collection, and Maintenance of the HSSI IAR Facility																								
6. 1. B.	Comprehensive Report on Reusable Irradiation Facilities																								
6. 2. A.	Coordinate the Operation, Data Collection, and Maintenance of the UCSB Irrad. Facility																								
11. REMARKS																									

1. CONTRACT REPORTING ELEMENT HSSI - 7. Embrittlement DB & Dosimetry Evaluation				2. REPORTING PERIOD 10/23/00 - 11/26/00				3. JCN NO. W6953																	
4. CONTRACTOR (NAME AND ADDRESS) OAK RIDGE NATIONAL LABORATORY P.O. BOX 2008 OAK RIDGE, TN 37831				5. CONTRACT PERIOD FY 1998-2001				6. ACTIVITY NO. 41 W6 95 3W 1																	
				7. NRC B&R NO. 860 15 21 20 05				8. DOE B&R NO. 40 10 01 06																	
9. MILESTONE IDEN. NO.	10. MILESTONE DESCRIPTION	FY 1998		FY 1999					FY 2000					FY 2001											
		Q3	Q4	Q1	Q2	Q3	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	
7. 1. A.	Evaluate and Input Surveillance Reports into Embrittlement Database																								
7. 1. B.	Complete Update 10																								
7. 1. C.	Complete Update 11																								
11. REMARKS																									