



ORNL/TM-12968

**OAK RIDGE
NATIONAL
LABORATORY**

RECEIVED

MAY 23 1966

OSTI



**Results of the Independent
Radiological Verification Survey
of the Remedial Action
Performed at the Former Alba
Craft Laboratory Site
Oxford, Ohio
(OXO001)**

K. R. Kleinhans
M. E. Murray
R. F. Carrier

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

MANAGED BY
LOCKHEED MARTIN ENERGY SYSTEMS, INC.
FOR THE UNITED STATES
DEPARTMENT OF ENERGY

UCN-13673 (36 6-95)

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

RM **MASTER**

This report has been reproduced directly from the best available copy.

Available to DOE and DOE contractors from the Office of Scientific and Technical Information, P.O. Box 62, Oak Ridge, TN 37831; prices available from (615) 576-8401, FTS 626-8401.

Available to the public from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Rd., Springfield, VA 22161.

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

HEALTH SCIENCES RESEARCH DIVISION

Environmental Restoration and Waste Management Non-Defense Programs
(Activity No. EX 20 20 010)

**Results of the Independent Radiological Verification Survey
of the Remedial Action Performed at the Former
Alba Craft Laboratory Site, Oxford, Ohio
(OXO001)**

K. R. Kleinhans,* M. E. Murray, and R. F. Carrier

Date of publication — April 1996

Investigation Team

R. D. Foley— Measurement Applications and Development Manager
M. E. Murray— Radiological Program Director
K. R. Kleinhans* — Survey Team Leader

Survey Team Members

| | |
|------------------|-----------------|
| J. F. Allred | M. E. Murray |
| A. C. Butler** | V. P. Patania |
| G. H. Cofer | D. E. Rice |
| R. L. Coleman | D. A. Rose |
| R. C. Gosslee | R. E. Rodriguez |
| R. A. Mathis | P. F. Tiner |
| S. P. McKenzie | J. Wade |
| D. D. Mckinney** | W. A. Williams† |
| W. Winton | |


*Former employee of Martin Marietta Energy Systems, Inc

**Midwest Technical, Inc.

†U.S. Department of Energy

Work performed by the
Measurement Applications and Development Group

Prepared by the
OAK RIDGE NATIONAL LABORATORY
Oak Ridge, Tennessee 37831-6285
managed by
LOCKHEED MARTIN ENERGY RESEARCH CORP.
for the
U. S. DEPARTMENT OF ENERGY
under contract DE-AC05-96OR22464



CONTENTS

| | |
|--------------------------------------|-----|
| LIST OF FIGURES | iii |
| LIST OF TABLES | v |
| ACKNOWLEDGMENTS | vii |
| ABSTRACT | ix |
| INTRODUCTION | 1 |
| SCOPE OF THE SURVEY | 2 |
| SURVEY METHODS | 2 |
| SURFACE RADIATION MEASUREMENTS | 2 |
| SAMPLING AND ANALYSES | 2 |
| SURVEY RESULTS | 3 |
| RADIATION MEASUREMENTS | 3 |
| SAMPLE RESULTS | 3 |
| SIGNIFICANCE OF FINDINGS | 4 |
| REFERENCES | 5 |




LIST OF FIGURES

| | | |
|---|--|----|
| 1 | Diagram showing the general location of Oxford, Ohio | 6 |
| 2 | Diagram showing the location of the former Alba Craft Laboratory (ACL) in the City of Oxford, Ohio | 7 |
| 3 | Diagram of the ACL site showing the foundation line of the former building and the grid established for referencing data locations | 8 |
| 4 | Diagram showing the locations of most systematic samples collected at the ACL | 9 |
| 5 | Diagram showing locations of samples VS241, VS242, and VS243 collected over the sewer line between the corner of the former ACL building and the residential property to the northeast | 10 |
| 6 | Enlargement (from Fig. 4) showing locations of systematic samples collected at the north end of the ACL property from N20 to N50 | 11 |
| 7 | Enlargement (from Fig. 4) showing locations of systematic samples collected at the south end of the ACL property from S20 to ~N18 | 12 |
| 8 | Diagram showing locations of biased samples collected on the ACL property | 13 |


LIST OF TABLES

| | | |
|---|---|----|
| 1 | Applicable guidelines for protection against radiation | 14 |
| 2 | Background radiation levels for the Oxford, Ohio, area | 15 |
| 3 | Radionuclide concentrations in soil samples collected at the former ACL, Oxford, Ohio | 16 |



ACKNOWLEDGMENTS

This project was sponsored by the Office of Environmental Restoration, U.S. Department of Energy, under contract DE-AC05-96OR22464 with Lockheed Martin Energy Research Corp. The authors wish to acknowledge the essential contributions of J. F. Allred, G. H. Cofer, R. C. Gosslee, R. A. Mathis, S. P. McKenzie, D. D. McKinney, V. P. Patania, R. E. Rodriguez, D. A. Roberts, D. A. Rose, P. F. Tiner, and W. Winton of the Measurement Applications and Development Group, Health Sciences Research Division, Oak Ridge National Laboratory, for their participation in collecting, reporting, and analyzing the data for this effort. The surveying assistance of A. C. Butler and the graphics skills of J. M. Lovegrove of Midwest Technical, Inc., are also gratefully acknowledged.



ABSTRACT


Between October 1952 and February 1957, National Lead of Ohio (NLO), a primary contractor for the Atomic Energy Commission (AEC), subcontracted certain uranium machining operations to Alba Craft Laboratory, Incorporated, located at 10-14 West Rose Avenue, Oxford, Ohio. In 1992, personnel from Oak Ridge National Laboratory (ORNL) confirmed the presence of residual radioactive materials from the AEC-related operations in and around the facility in amounts exceeding the applicable Department of Energy (DOE) guidelines.

Although the amount of uranium found on the property posed little health hazard if left undisturbed, the levels were sufficient to require remediation to bring radiological conditions into compliance with current guidelines, thus ensuring that the public and the environment are protected. The Remedial Action Contractor for these properties was Bechtel National, Incorporated (BNI).

DOE requires that verification of completed cleanup work at DOE Formerly Utilized Sites Remedial Action Program (FUSRAP) sites such as this shall be performed and documented by an Independent Verification Contractor. The objective of verification activities is to certify that the remedial action reduced contamination levels to within authorized limits.

A team from ORNL conducted a radiological verification survey of the former Alba Craft Laboratory property between December 1994 and February 1995. The survey was conducted at the request of DOE and included directly measured radiation levels, the collection and analysis of soil samples to determine concentrations of uranium and certain other radionuclides, and comparison of these data to the guidelines. This document reports the findings of this survey.

The results of the independent verification survey of the former Alba Craft Laboratory property demonstrate that all contaminated areas have been remediated to radionuclide concentrations and activity levels below the applicable guideline limits set by DOE.



**Results of the Independent Radiological Verification Survey of the Remedial Action
Performed at the Former Alba Craft Laboratory Site, Oxford, Ohio
(OXO001)**

INTRODUCTION

During the approximate time period between October 1952 and February 1957, National Lead of Ohio (NLO), a primary contractor for the Atomic Energy Commission (AEC), subcontracted certain uranium machining operations to Alba Craft Laboratory, Incorporated, Oxford, Ohio. The facility, located at 10-14 West Rose Avenue, also housed operations in 1954 involving NLO personnel and NLO uranium material. It is not known how much material was machined at the site by NLO in 1954, but the total quantity of uranium machined by Alba Craft is estimated at several hundred tons. Figures 1 and 2 show the relative location of the City of Oxford in southwestern Ohio and the location of the property in Oxford.

Early investigations of the Alba Craft property had disclosed evidence of residual radioactive materials from the AEC-related operations at the site. At the request of the Department of Energy (DOE) under the Formerly Utilized Sites Remedial Action Program (FUSRAP), a radiological assessment was conducted in 1992 by personnel from Oak Ridge National Laboratory (ORNL) to locate and define the extent of the contamination on the site itself, and to determine whether any of these materials had migrated off-site.* The results of that survey confirmed the presence of residual radioactive material from the AEC-related operations in and around the Alba Craft facility in amounts exceeding the applicable DOE guidelines (Table 1).¹ Although the amount of uranium found posed little health hazard if left undisturbed, the levels were sufficient to require cleanup action to bring the property into compliance with current guidelines, thereby ensuring that the public and the environment are protected.

DOE's Environmental Restoration Program dictates that independent verification (IV) of completed cleanup work at DOE FUSRAP sites shall be performed and documented according to prescribed procedures prior to certification of the property for release for unrestricted use.^{2,3} The objective of verification activities is to confirm that the remedial action reduced contamination levels to within authorized limits.

As the designated Independent Verification Contractor (IVC) for this site, ORNL's Measurement Applications and Development Group was assigned to validate the remedial action and restoration activities conducted by the Remedial Action Contractor, Bechtel National, Incorporated (BNI). At the time of the verification survey, the building had been completely razed, and the majority of the dismantled remains had been removed off-site. Figure 3 is a diagram indicating the former location of the Alba Craft Laboratory building and showing the grid established by BNI during the remedial activities to enable precise location of measurements and samples.

*The survey was performed by members of the Measurement Applications and Development Group, Health Sciences Research Division, Oak Ridge National Laboratory under DOE contract DE-AC05-96OR22464 with Lockheed Martin Energy Research Corp.

SCOPE OF THE SURVEY

The outdoor survey of the property included:

- A gamma scan near the ground surface over 100% of the property.
- Collection of systematic surface and subsurface soil samples.
- Collection of biased surface soil samples.
- Measurements of gamma radiation levels at 1 m at soil sample locations.
- Selected beta-gamma scanning at suspect areas such as locations of former doors.
- On-site field screening with a portable gamma spectrometer to estimate uranium concentrations in soil samples.
- Measurements of radiation levels and sampling of drains, sewerlines, and areas downstream from Alba Craft gutter drains.

SURVEY METHODS

Descriptions of the typical methods and instrumentation providing guidance for this survey are given in *Procedures Manual for the ORNL Radiological Survey Activities (RASA) Program*, ORNL/TM-8600, April 1987, and in *Measurement Applications and Development Group Guidelines*, ORNL-6782, January 1995.^{4,5}

SURFACE RADIATION MEASUREMENTS

Gamma radiation levels were determined using a portable NaI gamma scintillation meter. Because NaI gamma scintillators are energy dependent, measurements of gamma radiation levels in counts per minute (cpm) are normalized to pressurized ionization chamber (PIC) measurements to estimate gamma exposure rates in $\mu\text{R/h}$. Using a Geiger-Mueller pancake detector, beta-gamma radiation levels were measured in counts per minute (cpm) over selected soil surfaces to detect areas of elevated activity. The measurements were then converted to dose rates (mrad/h) and/or disintegrations per minute over 100 cm^2 (dpm/100 cm^2) for comparison with guideline values.

SAMPLING AND ANALYSES

Systematic surface (0- to 15-cm) soil samples were collected outdoors in all remediated areas at selected locations without regard to radiation levels (e.g., at grid points). Systematic samples were also collected at locations surrounding anomalies to define the boundaries of detectable contamination, and repeatedly at locations where remediation was incomplete. Where appropriate, subsurface soil samples were taken at these locations at increments of 15 cm below the surface to determine the completeness of cleanup. Biased soil samples were taken at locations of anomalous gamma or beta-gamma radiation levels.

A portable gamma spectrometer was used on-site in conjunction with beta-gamma measurements as a screening device to provide an immediate estimate of uranium content (pCi/g) in the field using the freshly collected soil samples. The reliability of the field screening method was established at another site by comparison of the field-estimated uranium concentration in a specific sample to the results found from later laboratory analysis of that same sample. When the comparisons proved to be dependable, the field screening method was relied upon to provide the basis for an immediate decision on further action. Cleanup could then be instituted immediately and followed promptly by the verification survey. The approach was conservative in that the maximum uranium concentration resulting from multiple field analyses performed on a single sample was selected for comparison with the site-specific ^{238}U guideline. The process of drying, weighing, grinding, and homogenizing samples according to the required QA procedures was performed in the laboratory at a later time as confirmation of radionuclide concentrations.

SURVEY RESULTS

Current DOE guidelines for FUSRAP sites are summarized in Table 1; the derived site-specific guideline for ^{238}U is also listed.⁶ Typical background radiation levels for the Oxford, Ohio, area are presented in Table 2. These data are provided for comparison with the survey results presented in this report. Gamma radiation levels are reported in gross $\mu\text{R/h}$. Background concentrations have not been subtracted from radionuclide concentrations in soil, debris, or other materials.

RADIATION MEASUREMENTS

Verification activities began on December 6, 1994, when BNI notified ORNL that two of the grid blocks were ready for confirmation. The verification survey continued through February of 1995. Following remediation, gamma exposure rate measurements over the entire property ranged from 4 to 6 $\mu\text{R/h}$, values well below guidelines and less than the typical range of exposure rates for the Oxford area (Table 1).

SAMPLE RESULTS

Locations of soil sample collection are shown on Figs. 4 through 8. Figures 4 and 5 show the locations of all the systematic soil samples. Samples VS41 through VS43 (Fig. 5) were collected from surface soil over a storm drain leading from the former Alba Craft building to a common city pipeline north of the curb at S. Main Street. The path of the pipeline ran beneath a garage attached to the residential property just northeast of and adjoining the Alba Craft property.

Sampling of several remediated areas led ORNL to request that BNI repeat the excavation. In the process of re-excavating these areas, previously sampled uncontaminated soil was removed along with contaminated soil. These locations were necessarily sampled a second time. The initial samples were collected at the original soil surface and the later samples were taken from newly exposed surface soil. This occurred at locations 0N,0E, 20N,16E, 45N,20E, and 20N,20E for

samples VS44 and VS81, VS7 and VS191, VS63 and VS184, VS203 and VS229. For instance, sample VS44 was collected prior to excavation; VS81 was collected later from the new surface soil at the bottom of the trench that BNI dug to excavate the drainline from the NE corner of the Alba Craft site. Sample VS7 was the original surface soil sample; VS191 was collected later to verify the additional remediation. Figures 6 and 7 are enlargements of the north and south portions of Fig. 4. Figure 8 displays the locations of biased samples. Table 3 details the results of soil analysis.

Concentrations of ^{226}Ra in all samples were within the range of typical background values with a maximum concentration of 1.2 pCi/g (Tables 1 and 3). Concentrations of ^{232}Th were generally within the range of typical background values with the exception of 8 samples. Those samples exceeded that highest background concentration (0.99 pCi/g, Table 1) with a maximum of 2.2 pCi/g. However, concentrations of ^{226}Ra and ^{232}Th are well within the guideline values in all samples.

The results of laboratory analysis of systematic soil samples taken from all excavated areas demonstrate final concentrations of ^{238}U ranging from 0.83 to 53 pCi/g (Table 3). Seventeen systematic samples contained concentrations of ^{238}U exceeding the derived guideline of 17.5 pCi/g (Table 2). Elevated concentrations of ^{238}U ranging from 22 to 73 pCi/g were found in 4 of 6 biased samples. However, averaging the results of the elevated samples along with the results of others collected within each immediate 100-m² area results in an average value that meets the guideline in every case.

SIGNIFICANCE OF FINDINGS

The results of the independent verification survey of the former Alba Craft Laboratory property demonstrate that all contaminated areas have been remediated to radionuclide concentrations and activity levels below the applicable guidelines for unrestricted use set by DOE.

REFERENCES

1. M. E. Murray, K. S. Brown, and R. A. Mathis, *Results of the Radiological Survey at the Former Alba Craft Laboratory Site Properties, Oxford, Ohio (OXO001)*, ORNL/RASA-92/14, Martin Marietta Energy Systems, Oak Ridge Natl. Lab., March 1993.
2. R. P. Whitfield, Deputy Assistant Secretary for Environmental Restoration, U.S. DOE, memorandum to J. J. Fiore, Director, Office of Eastern Area Programs, Office of Environmental Restoration, U.S. DOE, May 6, 1992.
3. *Verification and Certification Protocol--Supplement No. 2 to the FUSRAP Summary Protocol*, Rev. 1, U.S. DOE, Office of Nuclear Energy, Division of Facility and Site Decommissioning Projects, November 1985.
4. *Procedures Manual for the ORNL Radiological Survey Activities (RASA) Program*, ORNL/TM-8600, Martin Marietta Energy Systems, Inc., Oak Ridge Natl. Lab., April 1987.
5. *Measurement Applications and Development Group Guidelines*, ORNL-6782, Martin Marietta Energy Systems, Oak Ridge, Natl. Lab., January 1995.
6. W. A. Williams, Designation and Certification Manager, Division of Off-Site Programs, Office of Eastern Area Programs, Office of Environmental Restoration, U.S. Department of Energy, memorandum, "Uranium Guidelines for the Alba Craft Site, Oxford, Ohio, to L. K. Price, Director, Former Sites Restoration Division, Oak Ridge Field Office, U.S. Department of Energy,

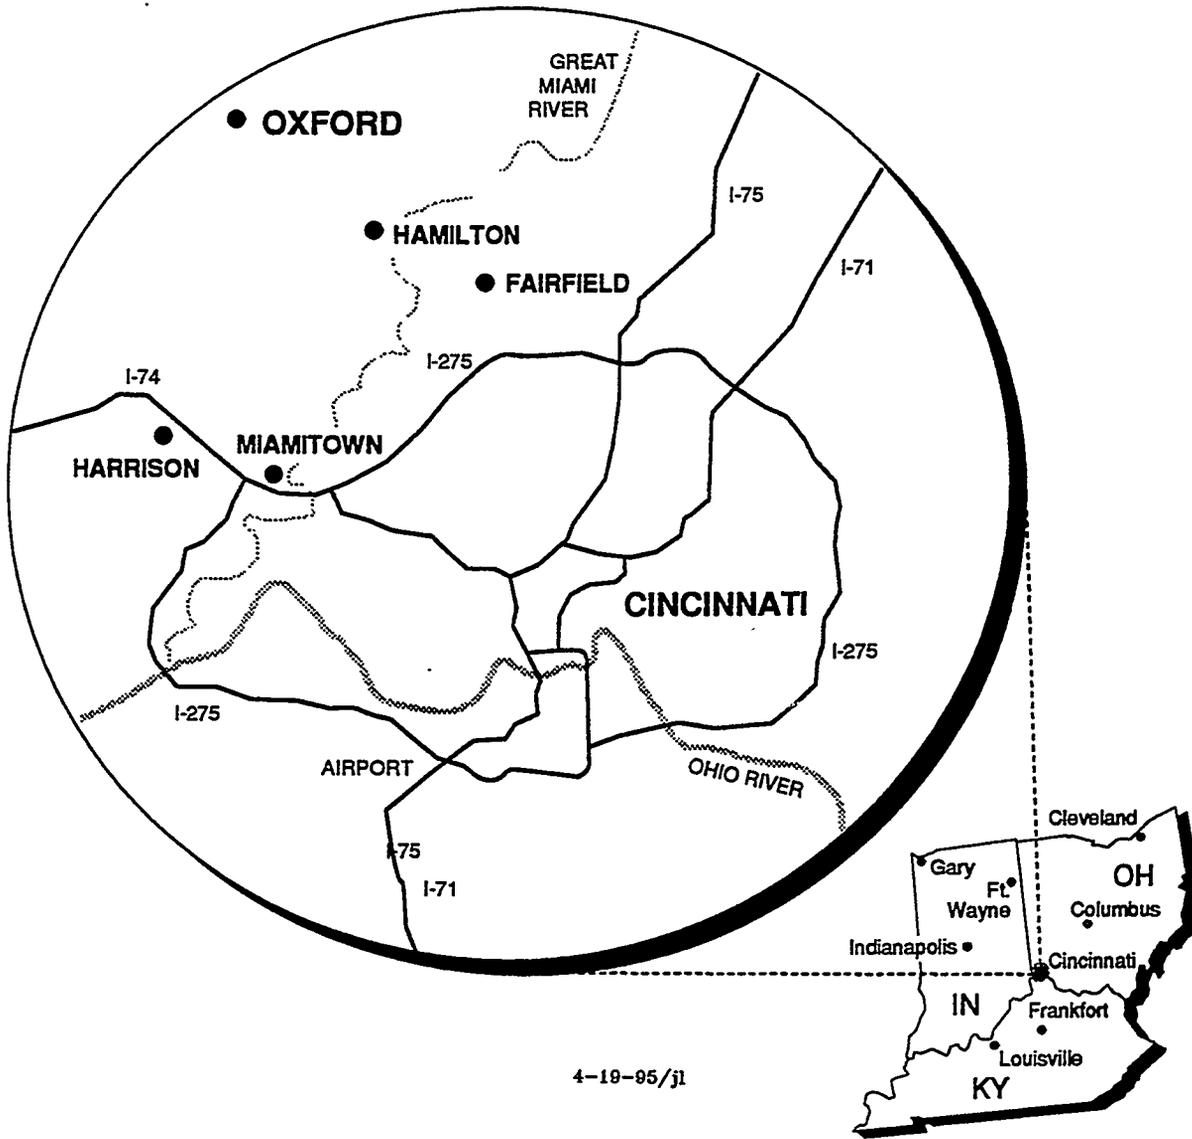


Fig. 1. Diagram showing the general location of Oxford, Ohio.

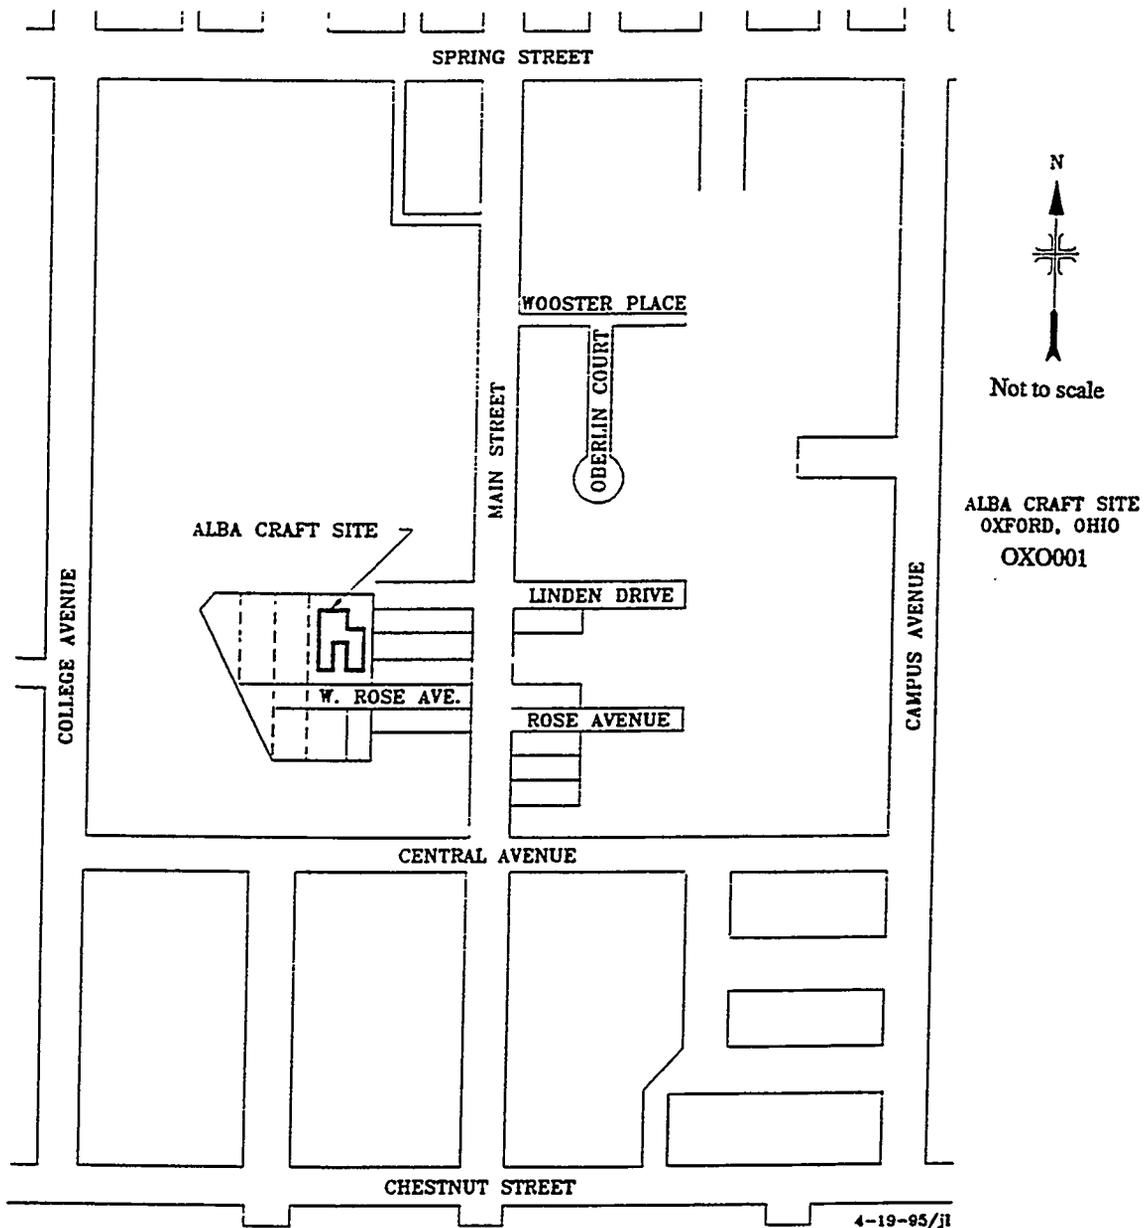


Fig. 2. Diagram showing the general location of the Alba Craft site, Oxford, Ohio.

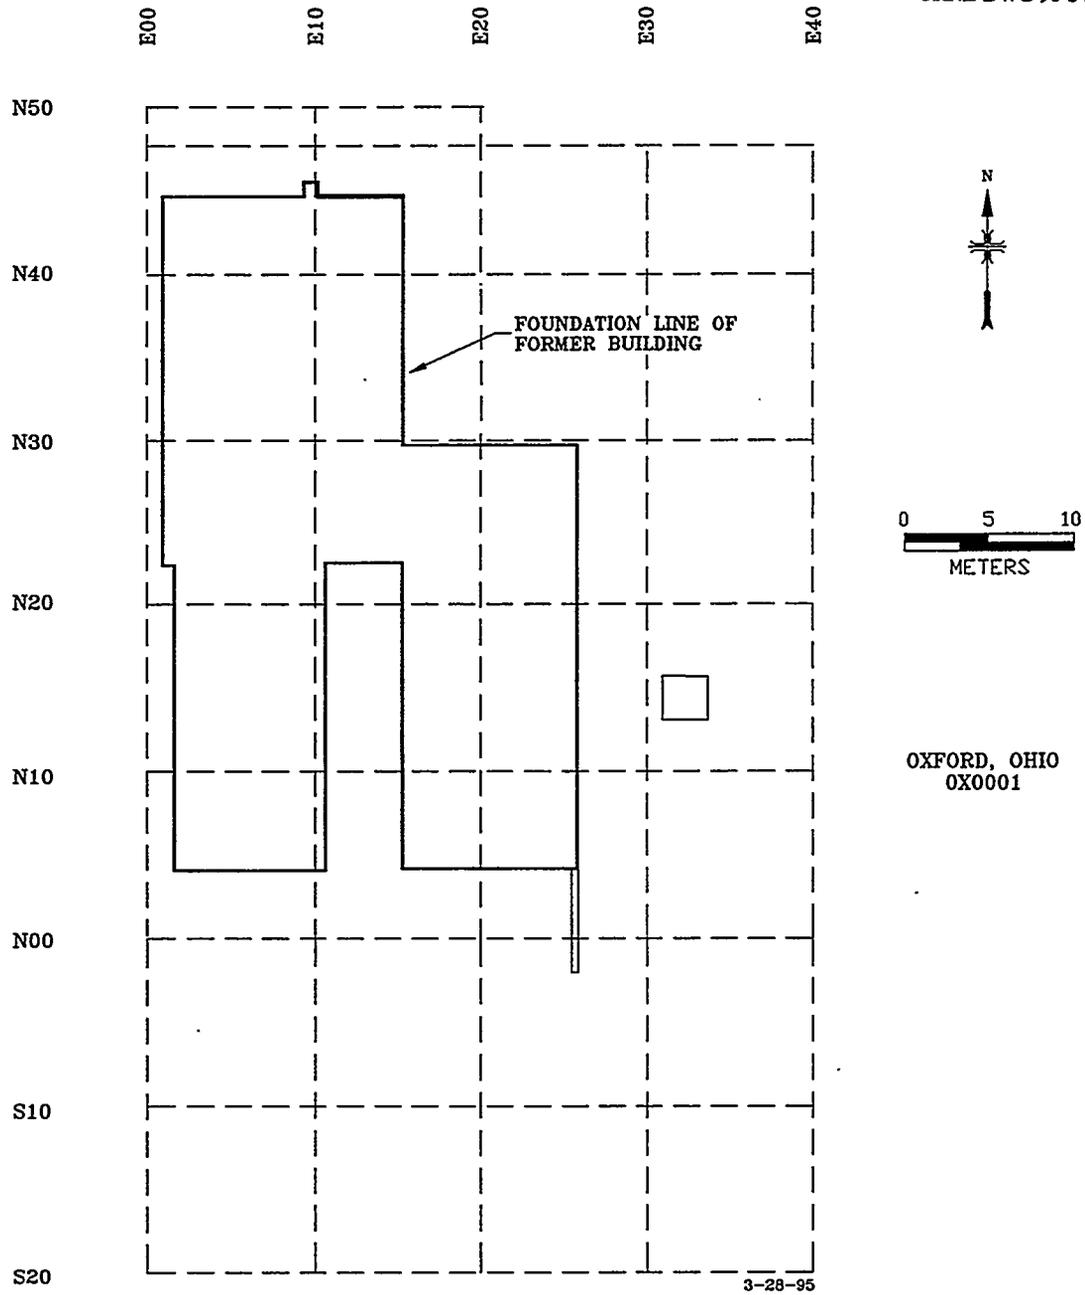


Fig. 3. Diagram of the ACL site showing the foundation line of the former building and the grid established for referencing data locations.

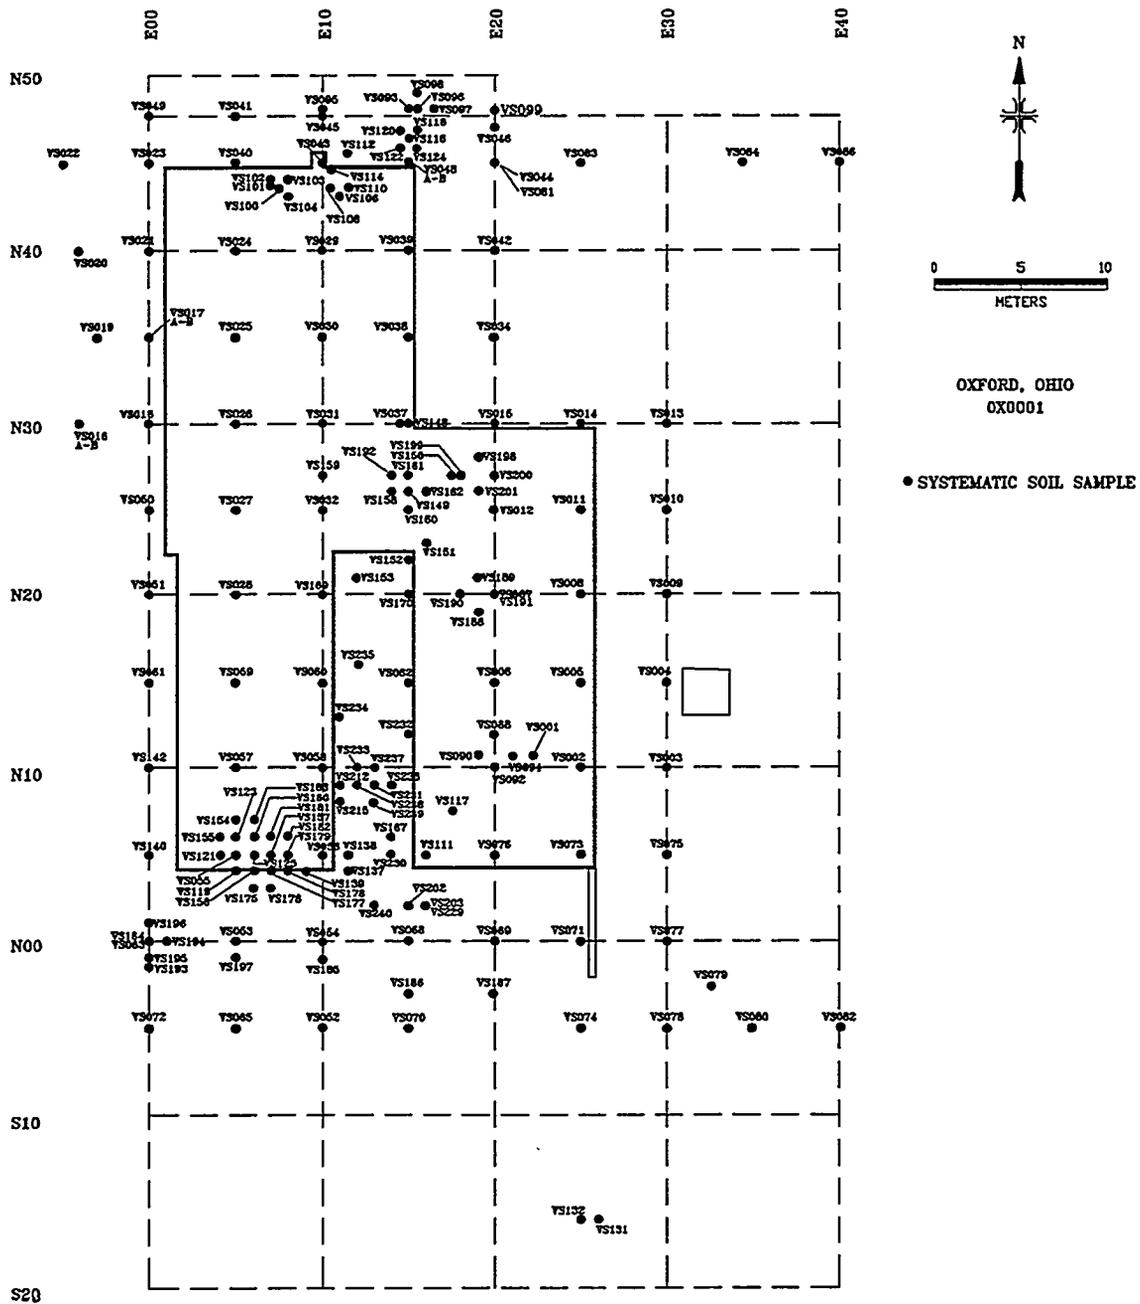


Fig. 4. Diagram showing the locations of most systematic samples collected at the ACL.

ORNL-DWG 95-5615R

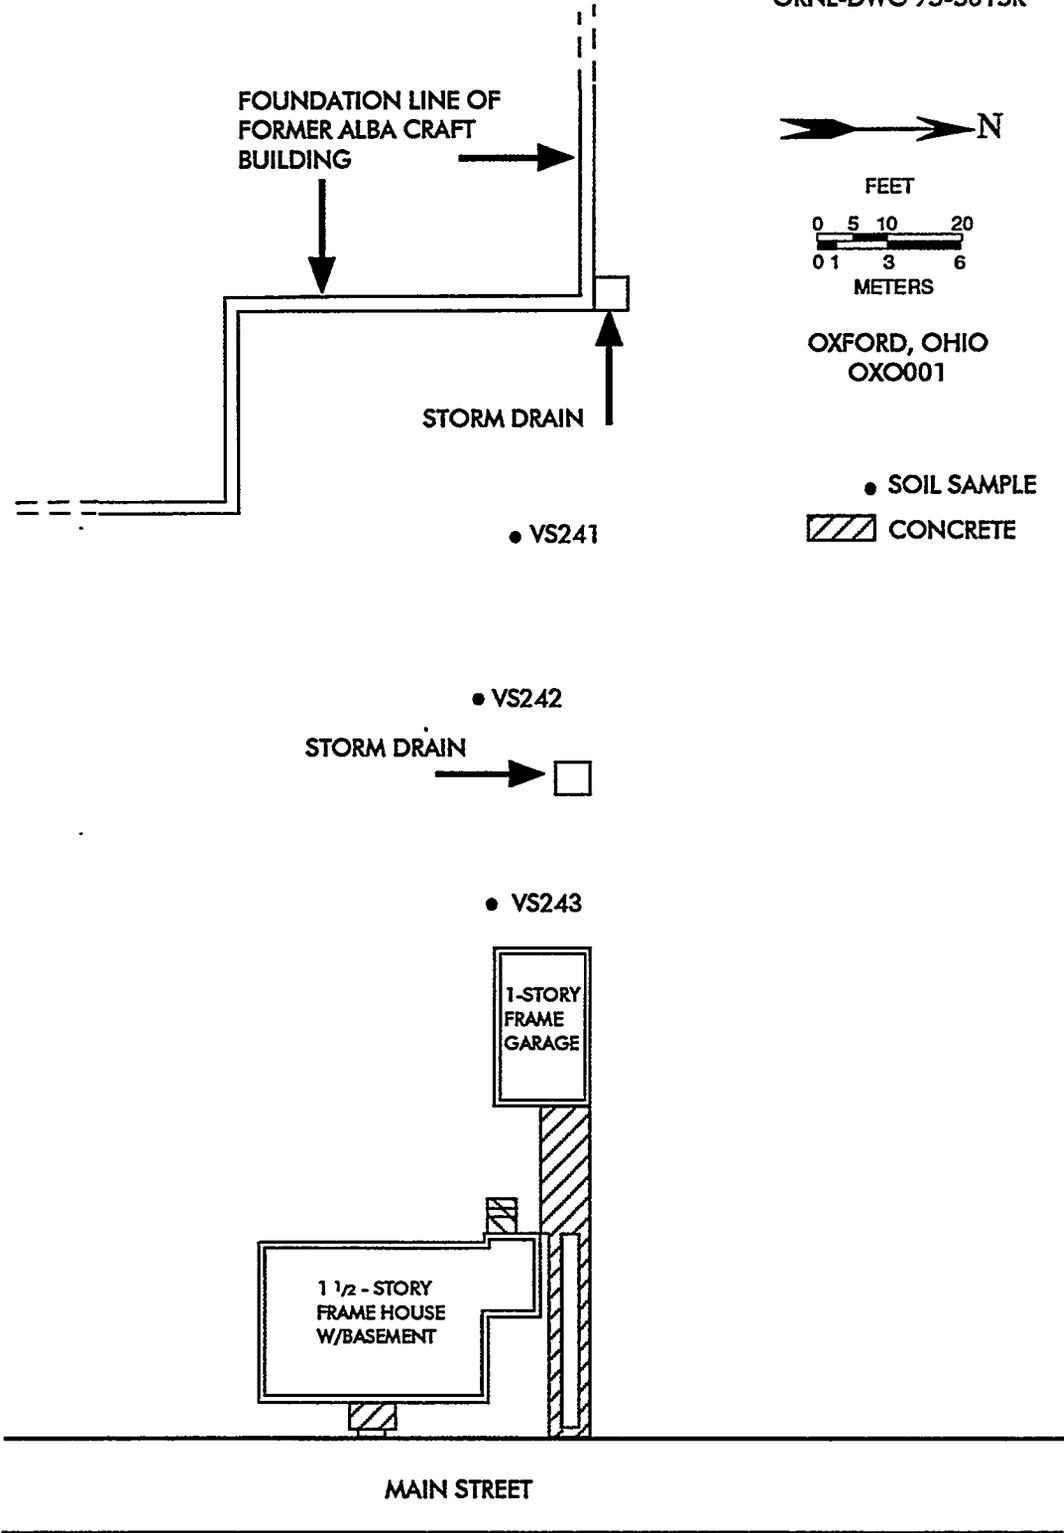


Fig. 5. Diagram showing locations of samples VS241, VS242, and VS243 collected over the sewer line between the corner of the former ACL building and the residential property to the northeast.

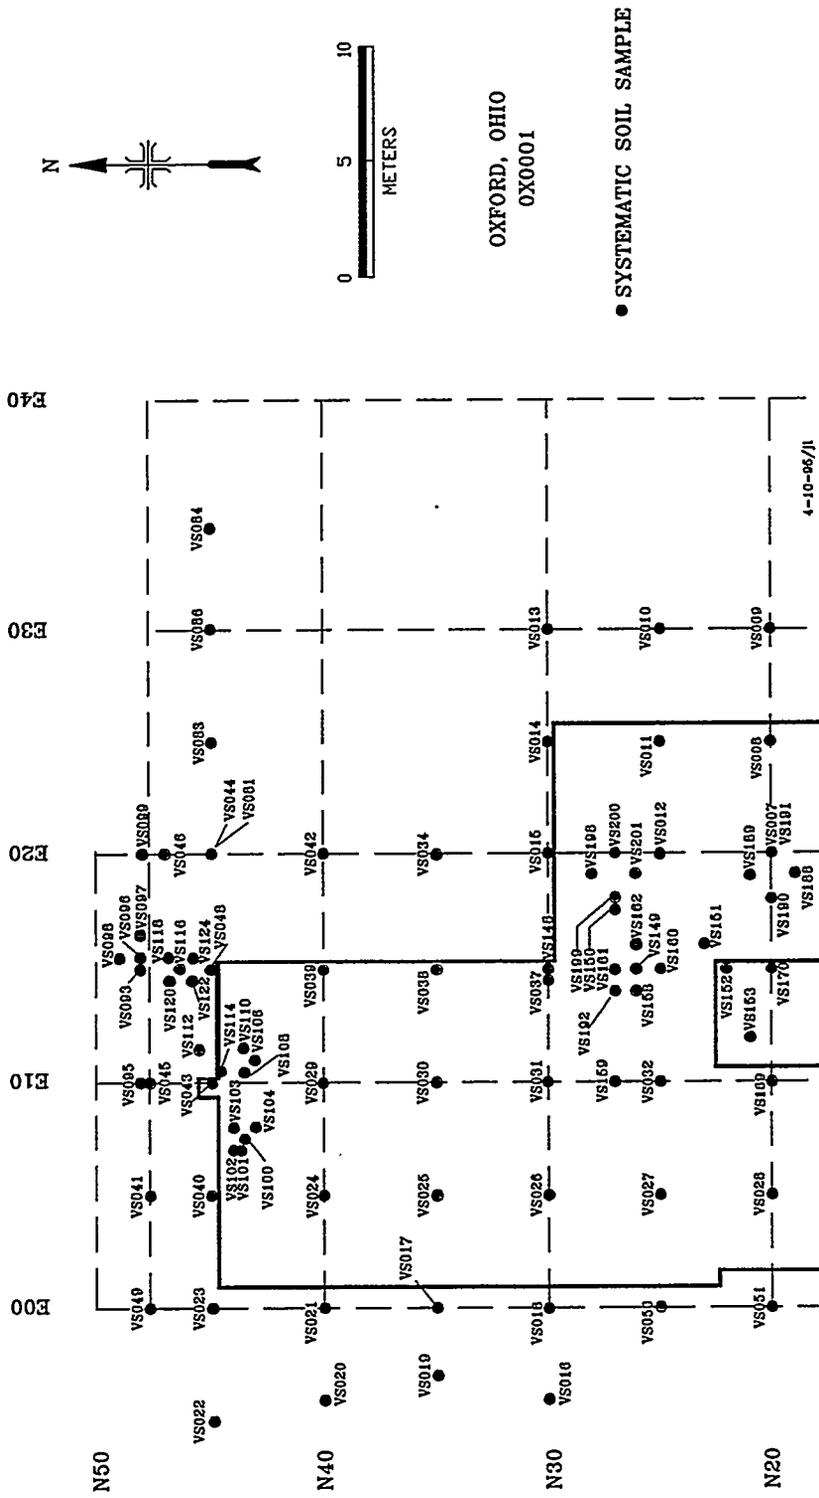


Fig. 6. Enlargement (from Fig. 4) showing locations of systematic samples collected at the north end of the ACL property from N20 to N50.

ORNL-DWG 95-5603

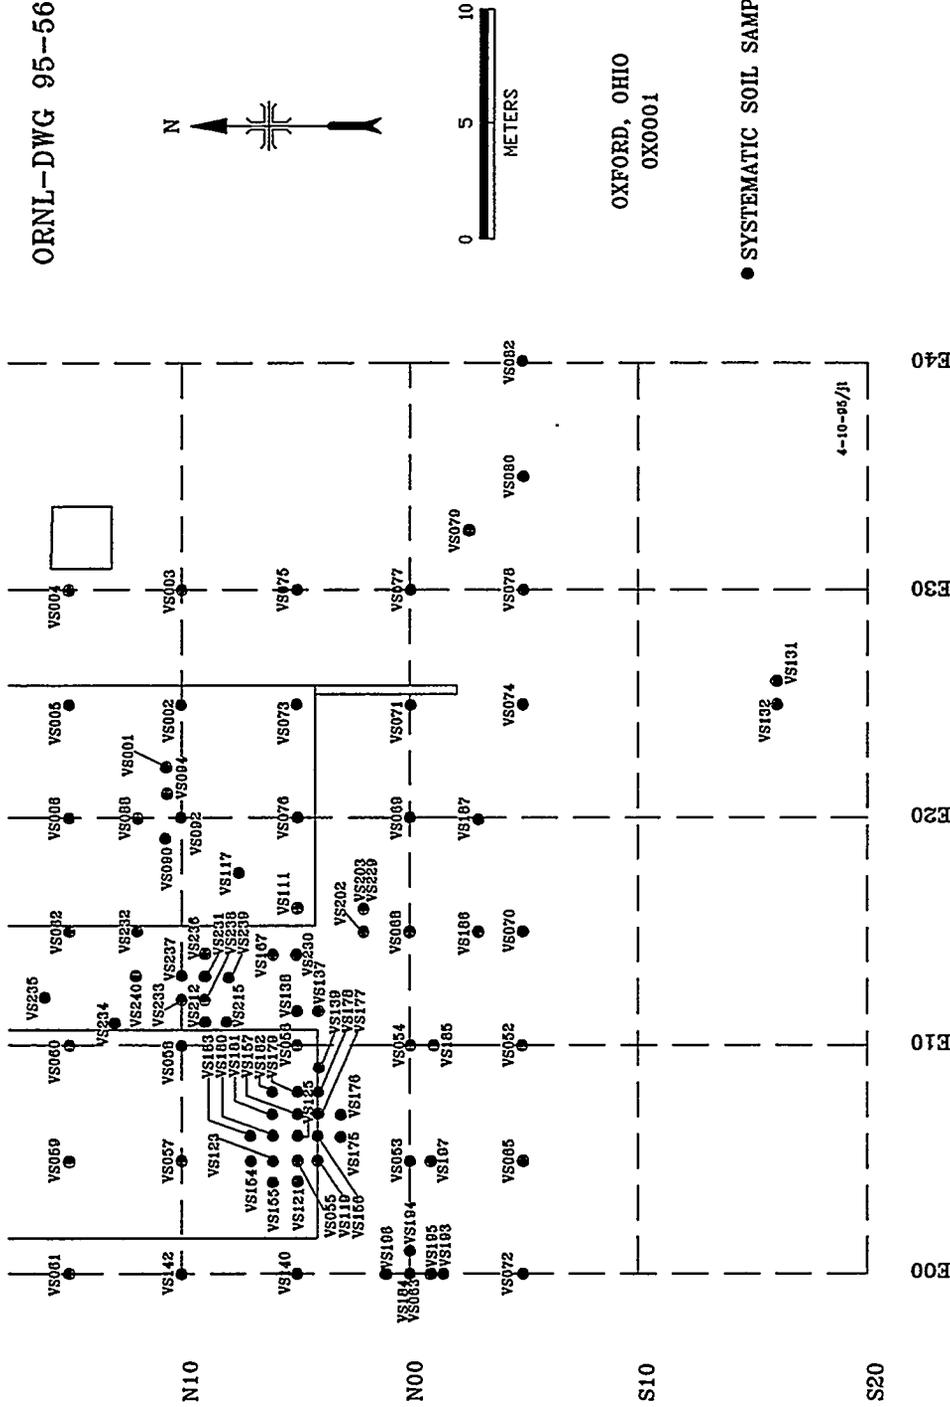


Fig. 7. Enlargement (from Fig. 4) showing locations of systematic samples collected at the south end of the ACL property from S20 to ~N18.

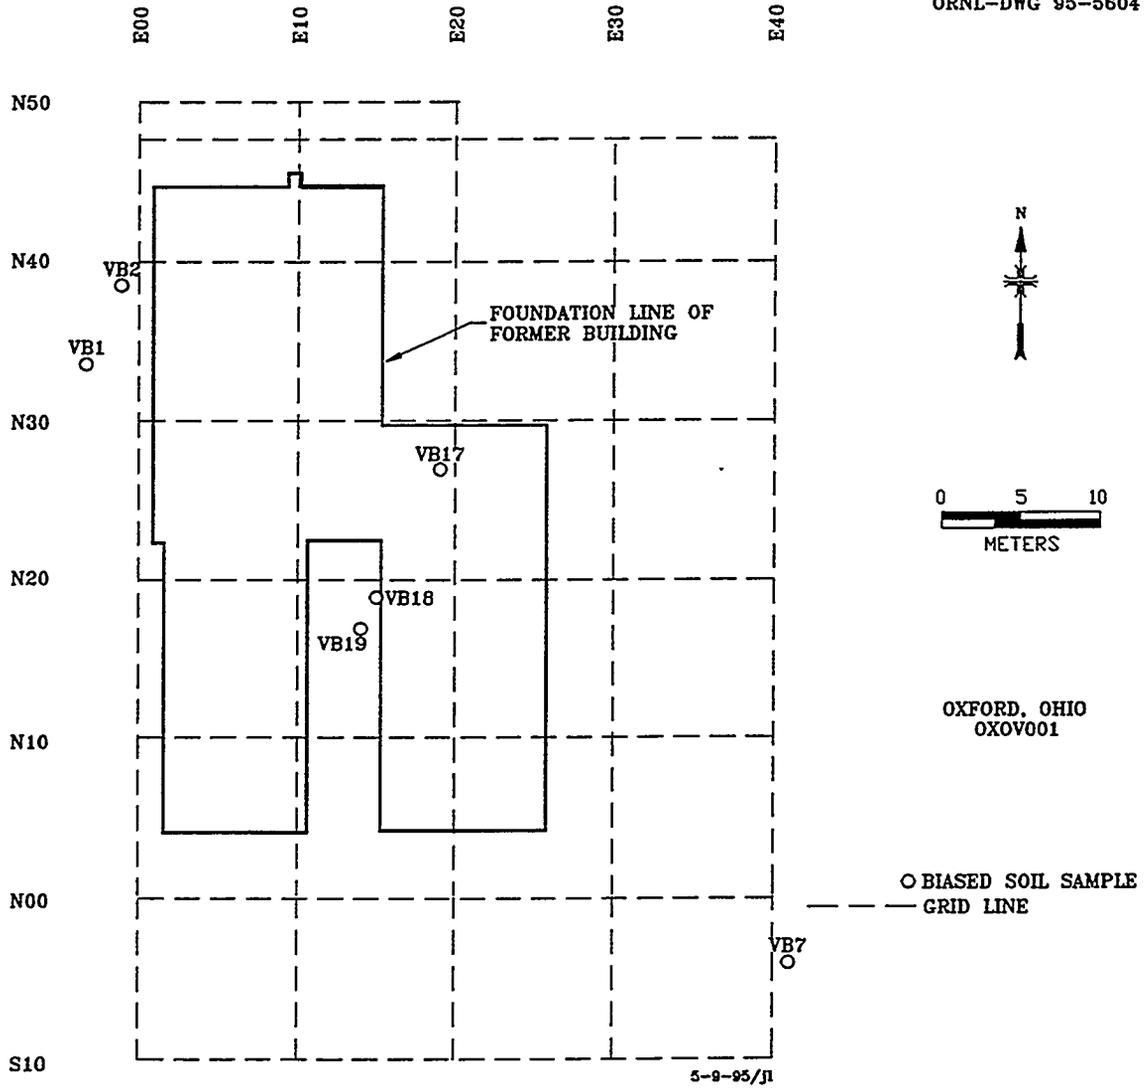


Fig. 8. Diagram showing locations of biased samples collected on the ACL property.

**Table 1. Applicable guidelines for protection against radiation
(Limits for uncontrolled areas)**

| Mode of exposure | Exposure conditions | Guideline value |
|---|--|---|
| Gamma radiation | Indoor gamma radiation level (above background) | 20 $\mu\text{R}/\text{h}^a$ |
| Total residual surface contamination ^b | ²³⁸ U, ²³⁵ U, U-natural (alpha emitters) or Beta-gamma emitters ^c Fixed and removable | 15,000 dpm/100 cm ² |
| | Average | 5,000 dpm/100 cm ² |
| | Removable | 1,000 dpm/100 cm ² |
| | ²³² Th, Th-natural (alpha emitters) or ⁹⁰ Sr (beta-gamma emitter) Fixed and removable | 3,000 dpm/100 cm ² |
| | Average | 1,000 dpm/100 cm ² |
| | Removable | 200 dpm/100 cm ² |
| Beta-gamma dose rates | ²²⁶ Ra, ²³⁰ Th, transuranics Fixed and removable | 300 dpm/100 cm ² |
| | Average | 100 dpm/100 cm ² |
| | Removable | 20 dpm/100 cm ² |
| | Surface dose rate averaged over not more than 1 m ² | 0.20 mrad/h |
| Radionuclide con- centrations in soil (generic) | Maximum dose rate in any 100-cm ² area | 1.0 mrad/h |
| | Maximum permissible con- centration of the following radionuclides in soil above background levels, averaged over a 100-m ² area ²²⁶ Ra ²³² Th ²³⁰ Th | 5 pCi/g averaged over the first 15 cm of soil below the surface; 15 pCi/g when averaged over 15-cm-thick soil layers more than 15 cm below the surface |
| Derived concentrations | ²³⁸ U | 17.5 pCi/g ^d |

^aThe 20 $\mu\text{R}/\text{h}$ shall comply with the basic dose limit (100 mrems/yr) when an appropriate-use scenario is considered.

^bDOE surface contamination guidelines are consistent with *NRC Guidelines for Decontamination at Facilities and Equipment Prior to Release for Unrestricted Use or Termination of Licenses for By-Product, Source, or Special Nuclear Material*, May 1987.

^cBeta-gamma emitters (radionuclides with decay modes other than alpha emission or spontaneous fission) except ⁹⁰Sr, ²²⁸Ra, ²²³Ra, ²²⁷Ac, ¹³³I, ¹²⁶I, ¹²⁵I.

^dDOE guidelines for uranium are derived on a site-specific basis. *Source*: W. A. Williams, Designation and Certification Manager, Division of Off-Site Programs, Office of Eastern Area Programs, Office of Environmental Restoration, U.S. Department of Energy, memorandum "Uranium Guidelines for the Alba Craft Site, Oxford, Ohio," to L. K. Price, Director, Former Sites Restoration Division, Oak Ridge Field Office, U.S. Department of Energy, July 15, 1994.

Sources: Adapted from U. S. Department of Energy, *Radiation Protection of the Public and the Environment*, DOE Order 5400.5, April 1990 and U.S. Department of Energy, *Guidelines for Residual Radioactive Material at FUSRAP and Remote SFMP Sites*, Rev. 2, March 1987; and U. S. Department of Energy *Radiological Control Manual*, DOE N5480.6 (DOE/EH-256T), June 1992.

Table 2. Background radiation levels and concentrations of selected radionuclides in soil samples taken near Oxford, Ohio

| Type of radiation measurement or sample | Radiation level or radionuclide concentration | |
|---|--|---------|
| | Range | Average |
| Gamma exposure rate at 1 m above ground surface ($\mu\text{R/h}$) ^a | 6 - 9 | 8 |
| Concentration of radionuclides in soil (pCi/g dry wt) ^b | | |
| ²³⁸ U | 0.86 - 2.2 | 1.3 |
| ²²⁶ Ra | 1.0 - 2.5 | 1.9 |
| ²³² Th | 0.71 - 0.99 | 0.89 |

^aResults of measurements taken at three locations near Oxford, Ohio.

^bResults of analysis of soil samples obtained from three locations near Oxford, Ohio.

Source: T. E. Myrick, B. A. Berven, and F. F. Haywood, *State Background Measurements Taken During 1975-1979*, ORNL/TM-7343, November, 1981.

Table 3. Results of radionuclide analysis of soil samples collected from the former Alba Craft Laboratory property, Oxford, Ohio

| Sample I.D. | Grid location ^b | Depth (cm) | Radionuclide concentration(pCi/g) ^a | | | |
|---------------------------------------|----------------------------|------------|--|------------|-------------------|-------------------|
| | | | ²³⁸ U _c | | ²²⁶ Ra | ²³² Th |
| | | | Field | Lab | | |
| <i>Systematic samples^d</i> | | | | | | |
| VS1 | 10.75N, 22.2E | 0-15 | 37 | 3.7 ± 0.85 | 0.87 ± 0.07 | 0.60 ± 0.09 |
| VS2 | 10N, 25E | 0-15 | <i>e</i> | 2.2 ± 0.27 | 0.78 ± 0.07 | 0.59 ± 0.09 |
| VS3 | 10N, 30E | 0-15 | 0.7 | 1.2 ± 0.32 | 1.1 ± 0.08 | 0.85 ± 0.11 |
| VS4 | 15N, 30E | 0-15 | 4.7 | 3.7 ± 0.38 | 1.2 ± 0.08 | 0.92 ± 0.14 |
| VS5 | 15N, 25E | 0-15 | <i>e</i> | 2.0 ± 0.29 | 0.93 ± 0.07 | 0.63 ± 0.10 |
| VS6 | 15N, 20E | 0-15 | 0.7 | 2.6 ± 0.78 | 1.1 ± 0.08 | 0.97 ± 0.12 |
| VS7 | 20N, 20E | 0-15 | 10 | 1.7 ± 0.34 | 0.61 ± 0.05 | 0.38 ± 0.08 |
| VS8 | 20N, 25E | 0-15 | <i>e</i> | 4.3 ± 0.81 | 0.83 ± 0.06 | 0.51 ± 0.09 |
| VS9 | 20N, 30E | 0-15 | <i>e</i> | 1.7 ± 0.80 | 1.2 ± 0.09 | 1.1 ± 0.14 |
| VS10 | 25N, 30E | 0-15 | 12 | 16 ± 1.1 | 1.2 ± 0.08 | 0.99 ± 0.14 |
| VS11 | 25N, 25E | 0-15 | 1.8 | 2.9 ± 0.56 | 0.77 ± 0.06 | 0.52 ± 0.10 |
| VS12 | 25N, 20E | 0-15 | <i>e</i> | 2.1 ± 0.30 | 0.54 ± 0.05 | 0.31 ± 0.06 |
| VS13 | 30N, 30E | 0-15 | 1.2 | 2.2 ± 0.32 | 1.2 ± 0.09 | 1.0 ± 0.12 |
| VS14 | 30N, 25E | 0-15 | 0.8 | 3.3 ± 0.32 | 0.94 ± 0.07 | 0.70 ± 0.11 |
| VS15 | 30N, 20E | 0-15 | 1.6 | 2.7 ± 0.33 | 0.96 ± 0.07 | 0.70 ± 0.10 |
| VS16A | 30N, 4.3W | 0-15 | 5.5 | 2.5 ± 0.57 | 1.4 ± 0.09 | 0.86 ± 0.13 |
| VS16B | 30N, 4.3W | 15-30 | 4.7 | 1.4 ± 0.40 | 1.5 ± 0.08 | 1.0 ± 0.13 |
| VS17A | 35N, 0E | 0-15 | 6.2 | 4.0 ± 1.5 | 1.3 ± 0.08 | 0.92 ± 0.14 |
| VS17B | 35N, 0E | 15-30 | 7.3 | 4.3 ± 0.50 | 1.3 ± 0.09 | 1.0 ± 0.13 |
| VS18 | 30N, 0E | 0-15 | <i>e</i> | 2.4 ± 0.37 | 0.94 ± 0.19 | 0.50 ± 0.14 |
| VS19 | 35N, 3W | 0-15 | <i>e</i> | 1.2 ± 0.25 | 0.65 ± 0.15 | 0.40 ± 0.15 |
| VS20 | 40N, 4W | 0-15 | <i>e</i> | 1.6 ± 0.30 | 0.95 ± 0.18 | 0.70 ± 0.20 |
| VS21 | 40N, 0E | 0-15 | 13 | 18 ± 0.95 | 1.0 ± 0.20 | 0.70 ± 0.20 |
| VS22 | 45N, 5W | 0-15 | <i>e</i> | 2.3 ± 0.35 | 0.90 ± 0.15 | 0.70 ± 0.20 |
| VS23 | 45N, 0E | 0-15 | 1.7 | 1.9 ± 0.32 | 1.0 ± 0.21 | 0.58 ± 0.07 |
| VS24 | 40N, 5E | 0-15 | 4.4 | 2.1 ± 0.50 | 0.80 ± 0.25 | 0.59 ± 0.10 |
| VS25 | 35N, 5E | 0-15 | 2.9 | 1.8 ± 0.42 | 0.78 ± 0.24 | 0.79 ± 0.25 |
| VS26 | 30N, 5E | 0-15 | 5.3 | 2.5 ± 0.36 | 1.0 ± 0.20 | 0.88 ± 0.20 |
| VS27 | 25N, 5E | 0-15 | 7.4 | 4.4 ± 0.48 | 1.1 ± 0.20 | 0.79 ± 0.18 |

Table 3. (continued)

| Sample I.D. | Grid location ^b | Depth (cm) | Radionuclide concentration(pCi/g) ^a | | | |
|-------------|----------------------------|------------|--|-------------|-------------------|-------------------|
| | | | ²³⁸ Uc | | ²²⁶ Ra | ²³² Th |
| | | | Field | Lab | | |
| VS28 | 20N, 5E | 0-15 | <i>e</i> | 2.0 ± 0.30 | 0.68 ± 0.15 | 0.26 ± 0.09 |
| VS29 | 40N, 10E | 0-15 | 4.1 | 2.1 ± 0.34 | 1.1 ± 0.21 | 0.96 ± 0.21 |
| VS30 | 35N, 10E | 0-15 | 5 | 1.8 ± 0.32 | 1.1 ± 0.21 | 0.64 ± 0.17 |
| VS31 | 30N, 10E | 0-15 | 5.4 | 2.0 ± 0.33 | 1.2 ± 0.21 | 0.82 ± 0.19 |
| VS32 | 25N, 10E | 0-15 | 3.1 | 1.9 ± 0.31 | 1.2 ± 0.21 | 0.80 ± 0.18 |
| VS34 | 35N, 20E | 0-15 | 4.5 | 1.8 ± 0.30 | 1.1 ± 0.19 | 0.47 ± 0.13 |
| VS37 | 30N, 14.5E | 0-15 | 6.1 | 4.2 ± 0.67 | 0.98 ± 0.27 | 0.86 ± 0.28 |
| VS38 | 35N, 15E | 0-15 | 9 | 6.7 ± 0.77 | 0.99 ± 0.20 | 0.83 ± 0.16 |
| VS39 | 40N, 15E | 0-15 | 4.6 | 4.1 ± 0.42 | 0.67 ± 0.14 | 0.57 ± 0.15 |
| VS40 | 45N, 5E | 0-15 | 11 | 11 ± 0.70 | 1.0 ± 0.14 | 0.77 ± 0.11 |
| VS41 | 47.7N, 5E | 0-15 | 15 | 13 ± 1.0 | 0.96 ± 0.19 | 1.1 ± 0.18 |
| VS42 | 40N, 20E | 0-15 | 4.6 | 1.9 ± 0.44 | 0.93 ± 0.26 | 0.89 ± 0.29 |
| VS43 | 45N, 10E | 0-15 | 11 | 7.9 ± 0.88 | 1.2 ± 0.29 | 0.61 ± 0.23 |
| VS44 | 45N, 20E | 0-15 | 15 | 19 ± 1.4 | 0.87 ± 0.20 | 0.72 ± 0.17 |
| VS45 | 47.7N, 10E | 0-15 | 2.4 | 1.9 ± 0.34 | 0.57 ± 0.15 | 0.25 ± 0.09 |
| VS46 | 47N, 20E | 0-15 | 5.8 | 4.3 ± 0.55 | 0.91 ± 0.21 | 0.50 ± 0.17 |
| VS48A | 45N, 15E | 0-15 | 2.1 | 5.4 ± 0.60 | 0.90 ± 0.15 | 0.56 ± 0.11 |
| VS48B | 45N, 15E | 15-30 | 10 | 12 ± 0.82 | 1.1 ± 0.21 | 0.51 ± 0.16 |
| VS49 | 47.7N, 0E | 0-15 | 3.6 | 3.4 ± 0.49 | 1.0 ± 0.17 | 0.77 ± 0.13 |
| VS50 | 25N, 0E | 0-15 | 5.4 | 1.4 ± 0.30 | 0.98 ± 0.16 | 0.77 ± 0.12 |
| VS51 | 20N, 0E | 0-15 | 2.8 | 2.4 ± 0.37 | 0.88 ± 0.19 | 0.37 ± 0.12 |
| VS52 | 5S, 10E | 0-15 | <i>e</i> | 0.95 ± 0.21 | 0.50 ± 0.09 | 0.36 ± 0.07 |
| VS53 | 0N, 5E | 0-15 | <i>e</i> | 4.2 ± 0.50 | 0.61 ± 0.16 | 0.29 ± 0.12 |
| VS54 | 0N, 10E | 0-15 | 4.4 | 6.9 ± 0.68 | 1.1 ± 0.17 | 0.87 ± 0.14 |
| VS55 | 5N, 5E | 0-15 | 26 | 21 ± 1.1 | 0.75 ± 0.17 | 0.58 ± 0.16 |
| VS56 | 5N, 10E | 0-15 | 8.6 | 6.0 ± 0.62 | 1.0 ± 0.21 | 0.59 ± 0.18 |
| VS57 | 10N, 5E | 0-15 | 3 | 7.4 ± 0.73 | 1.0 ± 0.17 | 0.87 ± 0.14 |
| VS58 | 10N, 10E | 0-15 | 8 | 11 ± 1.4 | 0.92 ± 0.14 | 0.92 ± 0.13 |
| VS59 | 15N, 5E | 0-15 | <i>e</i> | 1.3 ± 0.29 | 0.76 ± 0.13 | 0.45 ± 0.10 |
| VS60 | 15N, 10E | 0-15 | <i>e</i> | 1.6 ± 0.29 | 0.65 ± 0.16 | 0.34 ± 0.13 |
| VS61 | 15N, 0E | 0-15 | <i>e</i> | 3.8 ± 0.61 | 0.93 ± 0.25 | 0.65 ± 0.24 |
| VS62 | 15N, 15E | 0-15 | 8.1 | 7.1 ± 0.77 | 0.70 ± 0.16 | 0.78 ± 0.16 |

Table 3. (continued)

| Sample I.D. | Grid location ^b | Depth (cm) | Radionuclide concentration(pCi/g) ^a | | | |
|-------------|----------------------------|------------|--|------------|-------------------|-------------------|
| | | | ²³⁸ Uc | | ²²⁶ Ra | ²³² Th |
| | | | Field | Lab | | |
| VS63 | 0N, 0E | 0-15 | <i>e</i> | 1.9 ± 0.34 | 0.72 ± 0.13 | 0.23 ± 0.05 |
| VS65 | 5S, 5E | 0-15 | <i>e</i> | 1.1 ± 0.22 | 0.55 ± 0.10 | 0.24 ± 0.06 |
| VS68 | 0N,15E | 0-15 | 15 | 11 ± 0.86 | 0.82 ± 0.21 | 0.33 ± 0.12 |
| VS69 | 0N, 20E | 0-15 | 4 | 1.9 ± 0.32 | 0.90 ± 0.19 | 0.61 ± 0.16 |
| VS70 | 5S, 15E | 0-15 | <i>e</i> | 1.2 ± 0.26 | 0.34 ± 0.12 | 0.28 ± 0.12 |
| VS71 | 0N, 25E | 0-15 | <i>e</i> | 2.9 ± 0.79 | 0.80 ± 0.13 | 0.40 ± 0.08 |
| VS72 | 5S, 0E | 0-15 | <i>e</i> | 1.4 ± 0.32 | 0.41 ± 0.10 | 0.42 ± 0.10 |
| VS73 | 5N, 25E | 0-15 | <i>e</i> | 2.3 ± 0.35 | 0.79 ± 0.14 | 0.51 ± 0.10 |
| VS74 | 5S, 25E | 0-15 | <i>e</i> | 2.7 ± 0.32 | 0.47 ± 0.11 | 0.15 ± 0.07 |
| VS75 | 5N, 30E | 0-15 | 4.4 | 3.2 ± 0.61 | 1.2 ± 0.31 | 0.29 ± 0.17 |
| VS76 | 5N, 20E | 0-15 | 9.5 | 16 ± 1.7 | 0.94 ± 0.14 | 0.57 ± 0.10 |
| VS77 | 0N, 30E | 0-15 | 4.7 | 3.7 ± 0.43 | 1.1 ± 0.20 | 0.47 ± 0.13 |
| VS78 | 5S, 30E | 0-15 | 10 | 7.1 ± 0.71 | 0.93 ± 0.22 | 0.77 ± 0.21 |
| VS79 | 2.5S, 32.5E | 0-15 | 4.2 | 5.3 ± 0.65 | 0.83 ± 0.22 | 0.49 ± 0.19 |
| VS80 | 5S, 35E | 0-15 | 6.1 | 2.3 ± 0.51 | 0.99 ± 0.19 | 0.48 ± 0.09 |
| VS81 | 45N, 20E | 0-15 | 6 | 6.2 ± 0.55 | 0.99 ± 0.14 | 0.75 ± 0.12 |
| VS82 | 5S, 40E | 0-15 | 2.3 | 2.2 ± 0.31 | 0.86 ± 0.16 | 0.45 ± 0.12 |
| VS83 | 45N, 25E | 0-15 | 3.8 | 1.9 ± 0.31 | 1.0 ± 0.15 | 0.72 ± 0.12 |
| VS84 | 45N, 34.5E | 0-15 | 1.1 | 3.4 ± 0.40 | 0.93 ± 0.17 | 0.25 ± 0.08 |
| VS86 | 45N, 30E | 0-15 | 4.5 | 3.0 ± 0.37 | 1.2 ± 0.20 | 0.49 ± 0.13 |
| VS88 | 12N, 20E | 0-15 | 0.1 | 5.6 ± 0.50 | 0.59 ± 0.10 | 0.26 ± 0.07 |
| VS90 | 10.75N, 19E | 0-15 | <i>e</i> | 2.6 ± 0.31 | 0.54 ± 0.12 | 0.20 ± 0.08 |
| VS92 | 10N, 20E | 0-15 | 0.5 | 2.8 ± 0.33 | 0.64 ± 0.13 | 0.18 ± 0.08 |
| VS93 | 48N, 15E | 0-15 | <i>e</i> | 2.4 ± 0.34 | 0.91 ± 0.18 | 0.52 ± 0.14 |
| VS94 | 10.75N, 21E | 0-15 | 1.6 | 2.2 ± 0.34 | 0.39 ± 0.12 | 0.19 ± 0.09 |
| VS95 | 48N, 10E | 0-15 | 2.9 | 2.5 ± 0.37 | 0.91 ± 0.14 | 0.69 ± 0.11 |
| VS96 | 48N, 15.5E | 0-15 | 3.5 | 18 ± 0.89 | 0.83 ± 0.17 | 0.52 ± 0.14 |
| VS97 | 48N, 16.5E | 0-15 | 0.8 | 2.0 ± 0.36 | 0.86 ± 0.15 | 0.59 ± 0.11 |
| VS98 | 49N, 15.5E | 0-15 | 0.9 | 2.3 ± 0.39 | 0.95 ± 0.21 | 0.35 ± 0.13 |
| VS99 | 48N, 20E | 0-15 | 4.3 | 3.6 ± 0.51 | 1.0 ± 0.17 | 0.79 ± 0.13 |
| VS100 | 43.5N, 7.5E | 0-15 | 4.4 | 2.9 ± 0.36 | 1.1 ± 0.19 | 0.65 ± 0.16 |
| VS101 | 43N, 7E | 0-15 | 12 | 8.1 ± 0.63 | 1.0 ± 0.19 | 0.68 ± 0.16 |

Table 3. (continued)

| Sample I.D. | Grid location ^b | Depth (cm) | Radionuclide concentration(pCi/g) ^a | | | |
|-------------|----------------------------|------------|--|------------|-------------------|-------------------|
| | | | ²³⁸ Uc | | ²²⁶ Ra | ²³² Th |
| | | | Field | Lab | | |
| VS102 | 44N, 7E | 0-15 | 17 | 16 ± 1.1 | 1.1 ± 0.20 | 0.98 ± 0.16 |
| VS103 | 44N, 8E | 0-15 | 45 | 27 ± 1.2 | 0.93 ± 0.16 | 0.47 ± 0.07 |
| VS104 | 43N, 8E | 0-15 | 6.8 | 7.0 ± 0.62 | 1.1 ± 0.16 | 0.46 ± 0.08 |
| VS106 | 44N, 11E | 0-15 | 21 | 24 ± 1.1 | 1.1 ± 0.19 | 0.79 ± 0.18 |
| VS108 | 43.5N, 10.5E | 0-15 | 17 | 16 ± 0.84 | 0.87 ± 0.17 | 0.45 ± 0.12 |
| VS110 | 43.5N, 11.5E | 0-15 | 20 | 22 ± 1.0 | 1.1 ± 0.19 | 0.43 ± 0.13 |
| VS111 | 5N, 16E | 0-15 | 4.2 | 5.9 ± 0.58 | 0.81 ± 0.13 | 0.71 ± 0.12 |
| VS112 | 44.5N, 11.5E | 0-15 | 18 | 9.5 ± 0.71 | 0.81 ± 0.13 | 0.51 ± 0.10 |
| VS114 | 44.5N, 10.5E | 0-15 | 7.7 | 7.3 ± 0.62 | 1.2 ± 0.16 | 0.58 ± 0.10 |
| VS116 | 46.3N, 15E | 0-15 | 7 | 6.8 ± 0.60 | 1.2 ± 0.16 | 0.80 ± 0.12 |
| VS117 | 7.5N, 17.5E | 0-15 | 2 | 5.4 ± 0.99 | 0.85 ± 0.13 | 0.55 ± 0.09 |
| VS118 | 46.8N, 15.5E | 0-15 | 2 | 2.3 ± 0.32 | 0.86 ± 0.16 | 0.39 ± 0.11 |
| VS119 | 4N, 5E | 0-15 | 10 | 9.7 ± 0.62 | 0.74 ± 0.15 | 0.33 ± 0.10 |
| VS120 | 46.8N, 14.5E | 0-15 | e | 1.4 ± 0.24 | 0.76 ± 0.15 | 0.19 ± 0.07 |
| VS121 | 5N, 4E | 0-15 | e | 4.5 ± 1.0 | 0.88 ± 0.16 | 0.50 ± 0.11 |
| VS122 | 45.8N, 14.5E | 0-15 | 37 | 45 ± 10 | 1.2 ± 0.17 | 0.45 ± 0.08 |
| VS123 | 6N, 5E | 0-15 | 36 | 24 ± 1.1 | 0.77 ± 0.12 | 0.34 ± 0.06 |
| VS124 | 45.8N, 15.5E | 0-15 | 14 | 13 ± 1.0 | 1.1 ± 0.20 | 0.92 ± 0.16 |
| VS125 | 5N, 6E | 0-15 | 45 | 34 ± 1.3 | 0.90 ± 0.18 | 0.56 ± 0.13 |
| VS131 | 16S, 26E | 0-15 | 9.3 | 12 ± 0.79 | 1.1 ± 0.20 | 0.41 ± 0.11 |
| VS132 | 16S, 25E | 0-15 | 6 | 10 ± 0.76 | 1.1 ± 0.16 | 0.68 ± 0.12 |
| VS137 | 4N, 11.5E | 0-15 | 1.3 | 6.2 ± 0.54 | 0.78 ± 0.12 | 0.27 ± 0.05 |
| VS138 | 5N, 11.8E | 0-15 | 7.5 | 14 ± 0.84 | 0.63 ± 0.17 | 0.19 ± 0.11 |
| VS139 | 4N, 9.8E | 0-15 | 5.3 | 11 ± 0.78 | 0.91 ± 0.14 | 0.60 ± 0.10 |
| VS140 | 5N, 0E | 0-15 | e | 2.1 ± 0.46 | 0.86 ± 0.18 | 0.60 ± 0.12 |
| VS142 | 10N, 0E | 0-15 | e | 1.9 ± 0.38 | 0.82 ± 0.15 | 0.53 ± 0.10 |
| VS148 | 30N, 15E | 0-15 | 8.5 | 6.3 ± 0.71 | 0.52 ± 0.17 | 0.34 ± 0.16 |
| VS149 | 26N, 15E | 0-15 | 21 | 22 ± 1.3 | 0.82 ± 0.22 | 0.37 ± 0.18 |
| VS150 | 27N, 17.5E | 0-15 | 13 | 13 ± 0.92 | 0.85 ± 0.17 | 0.69 ± 0.13 |
| VS151 | 23N, 16E | 0-15 | 2.3 | 2.7 ± 0.22 | 0.70 ± 0.10 | 0.56 ± 0.09 |
| VS152 | 22N, 15E | 0-15 | 8.7 | 6.8 ± 0.83 | 0.92 ± 0.27 | 0.29 ± 0.06 |
| VS153 | 21N, 12E | 0-15 | e | 1.3 ± 0.34 | 0.79 ± 0.19 | 0.31 ± 0.15 |

Table 3. (continued)

| Sample I.D. | Grid location ^b | Depth (cm) | Radionuclide concentration(pCi/g) ^a | | | |
|-------------|----------------------------|------------|--|-------------|-------------------|-------------------|
| | | | ²³⁸ Uc | | ²²⁶ Ra | ²³² Th |
| | | | Field | Lab | | |
| VS154 | 7N, 5E | 0-15 | 1.5 | 2.5 ± 0.45 | 0.68 ± 0.20 | 0.41 ± 0.17 |
| VS155 | 6N, 4E | 0-15 | e | 7.9 ± 0.62 | 0.65 ± 0.13 | 0.56 ± 0.11 |
| VS156 | 4N, 6E | 0-15 | 62 | 42 ± 1.7 | 0.89 ± 0.22 | 0.20 ± 0.12 |
| V157A | 5N, 7E | 0-15 | 49 | 35 ± 2.3 | 0.92 ± 0.25 | 0.71 ± 0.19 |
| V157B | 5N, 7E | 15-30 | 31 | 15 ± 2.0 | 1.2 ± 0.24 | 2.2 ± 0.24 |
| VS158 | 26N, 14E | 0-15 | 12 | 5.9 ± 0.50 | 0.82 ± 0.16 | 0.31 ± 0.12 |
| VS159 | 27N, 10E | 0-15 | 2.2 | 1.4 ± 0.37 | 0.80 ± 0.22 | 0.62 ± 0.20 |
| VS160 | 25N, 15E | 0-15 | 14 | 5.6 ± 0.53 | 0.74 ± 0.17 | 0.34 ± 0.14 |
| VS161 | 27N, 15E | 0-15 | 6.4 | 4.9 ± 0.50 | 0.83 ± 0.17 | 0.52 ± 0.15 |
| VS162 | 26N, 16E | 0-15 | 4 | 2.1 ± 0.43 | 0.94 ± 0.17 | 0.95 ± 0.14 |
| VS167 | 6N, 14E | 0-15 | 3.4 | 3.7 ± 0.42 | 0.80 ± 0.17 | 0.39 ± 0.13 |
| VS169 | 20N, 10E | 0-15 | 9 | 4.0 ± 0.47 | 0.78 ± 0.14 | 0.32 ± 0.06 |
| VS170 | 20N, 15E | 0-15 | 4.3 | 2.1 ± 0.39 | 0.90 ± 0.16 | 0.78 ± 0.12 |
| VS175 | 3N, 6E | 0-15 | 5.4 | 8.2 ± 0.60 | 0.78 ± 0.13 | 0.59 ± 0.10 |
| VS176 | 3N, 7E | 0-15 | 9.2 | 11 ± 0.95 | 0.73 ± 0.18 | 0.73 ± 0.17 |
| VS177 | 4N, 7E | 0-15 | 35 | 53 ± 2.1 | 0.81 ± 0.18 | 0.63 ± 0.16 |
| VS178 | 4N, 8E | 0-15 | 19 | 17 ± 0.92 | 0.78 ± 0.15 | 0.55 ± 0.10 |
| VS179 | 5N, 8E | 0-15 | 26 | 21 ± 1.5 | 0.84 ± 0.25 | 0.42 ± 0.18 |
| VS180 | 6N, 6E | 0-15 | e | 1.0 ± 0.23 | 0.83 ± 0.16 | 0.28 ± 0.10 |
| VS181 | 6N, 7E | 0-15 | e | 0.83 ± 0.29 | 0.47 ± 0.16 | 0.22 ± 0.13 |
| VS182 | 6N, 8E | 0-15 | 3.8 | 3.0 ± 0.37 | 0.55 ± 0.14 | 0.29 ± 0.12 |
| VS183 | 7N, 6E | 0-15 | 6.3 | 4.8 ± 0.50 | 0.97 ± 0.19 | 0.43 ± 0.14 |
| VS184 | 0N, 0E | 0-15 | 18 | 13 ± 1.1 | 0.79 ± 0.19 | 1.1 ± 0.18 |
| VS185 | 1S, 10E | 0-15 | 4.1 | 3.2 ± 0.43 | 0.82 ± 0.14 | 0.68 ± 0.12 |
| VS186 | 3S, 15 | 0-15 | 7.1 | 5.9 ± 0.52 | 0.84 ± 0.16 | 0.56 ± 0.14 |
| VS187 | 3S, 20E | 0-15 | 4.9 | 2.5 ± 0.46 | 0.92 ± 0.17 | 1.2 ± 0.16 |
| VS188 | 19N, 19E | 0-15 | 7.1 | 5.7 ± 0.68 | 0.86 ± 0.23 | 0.41 ± 0.17 |
| VS189 | 21N, 19E | 0-15 | 9.2 | 6.3 ± 0.71 | 0.62 ± 0.16 | 0.53 ± 0.13 |
| VS190 | 20N, 18E | 0-15 | 5.6 | 3.8 ± 0.55 | 0.51 ± 0.17 | 0.17 ± 0.04 |
| VS191 | 20N, 20E | 0-15 | 6.2 | 4.7 ± 0.64 | 0.67 ± 0.15 | 0.63 ± 0.13 |
| VS192 | 27N, 14E | 0-15 | 7.3 | 3.8 ± 0.44 | 0.72 ± 0.16 | 0.59 ± 0.16 |
| VS193 | 1.5S, 0E | 0-15 | 3.8 | 1.4 ± 0.38 | 0.97 ± 0.17 | 0.90 ± 0.14 |

Table 3. (continued)

| Sample I.D. | Grid location ^b | Depth (cm) | Radionuclide concentration(pCi/g) ^a | | | |
|-----------------------------------|----------------------------|------------|--|------------|-------------------|-------------------|
| | | | ²³⁸ U _c | | ²²⁶ Ra | ²³² Th |
| | | | Field | Lab | | |
| VS194 | 0N, 1E | 0-15 | 13 | 9.9 ± 0.93 | 0.70 ± 0.23 | 0.30 ± 0.16 |
| VS195 | 0N, 1W | 0-15 | <i>e</i> | 1.0 ± 0.30 | 0.93 ± 0.16 | 0.88 ± 0.12 |
| VS196 | 1N, 0E | 0-15 | 3.2 | 1.9 ± 0.45 | 0.81 ± 0.18 | 0.45 ± 0.12 |
| VS197 | 1S, 5E | 0-15 | 0.38 | 1.5 ± 0.39 | 0.51 ± 0.18 | 0.20 ± 0.14 |
| VS198 | 28N, 19E | 0-15 | 9.8 | 10 ± 1.0 | 0.83 ± 0.23 | 0.28 ± 0.06 |
| VS199 | 27N, 18E | 0-15 | 11 | 7.5 ± 0.80 | 0.80 ± 0.18 | 0.56 ± 0.13 |
| VS200 | 27N, 20E | 0-15 | 4.5 | 2.4 ± 0.33 | 0.70 ± 0.15 | 0.27 ± 0.10 |
| VS201 | 26N, 19E | 0-15 | <i>e</i> | 2.5 ± 0.45 | 0.46 ± 0.16 | 0.14 ± 0.04 |
| VS202 | 2N, 15E | 0-15 | 2.4 | 2.4 ± 0.54 | 0.92 ± 0.18 | 0.86 ± 0.17 |
| VS203 | 2N, 16E | 0-15 | 12 | 19 ± 1.3 | 0.99 ± 0.25 | 0.41 ± 0.20 |
| VS212 | 9N, 11E | 0-15 | 18 | 11 ± 1.0 | 0.74 ± 0.19 | 0.74 ± 0.16 |
| VS215 | 8N, 11E | 0-15 | 0.98 | 2.7 ± 0.55 | 0.61 ± 0.21 | 0.16 ± 0.14 |
| VS229 | 2N, 16E | 0-15 | <i>e</i> | 1.8 ± 0.32 | 0.58 ± 0.14 | 0.15 ± 0.10 |
| VS230 | 5N, 14E | 0-15 | <i>e</i> | 3.0 ± 0.56 | 0.49 ± 0.19 | 0.29 ± 0.18 |
| VS231 | 9N, 13E | 0-15 | 18 | 20 ± 1.4 | 1.0 ± 0.23 | 0.73 ± 0.16 |
| VS232 | 12N, 15E | 0-15 | <i>e</i> | 5.2 ± 0.61 | 0.85 ± 0.22 | 0.17 ± 0.13 |
| VS233 | 10N, 12E | 0-15 | 4.9 | 4.7 ± 0.75 | 0.63 ± 0.18 | 0.27 ± 0.10 |
| VS234 | 13N, 11E | 0-15 | 3.4 | 8.3 ± 0.93 | 0.83 ± 0.21 | 0.50 ± 0.14 |
| VS235 | 16N, 12E | 0-15 | <i>e</i> | 1.2 ± 0.42 | 0.62 ± 0.22 | 0.24 ± 0.06 |
| VS236 | 9N, 14E | 0-15 | <i>e</i> | 2.2 ± 0.51 | 0.72 ± 0.19 | 0.22 ± 0.10 |
| VS237 | 13N, 10E | 0-15 | 15 | 13 ± 1.2 | 0.93 ± 0.23 | 0.76 ± 0.17 |
| VS238 | 9N, 12E | 0-15 | <i>e</i> | 2.5 ± 0.49 | 0.67 ± 0.21 | 0.29 ± 0.17 |
| VS239 | 8N, 13E | 0-15 | 15 | 16 ± 1.2 | 0.82 ± 0.20 | 0.63 ± 0.14 |
| VS240 | 12N, 13E | 0-15 | 2.2 | 4.5 ± 0.52 | 0.58 ± 0.16 | 0.13 ± 0.03 |
| VS241 | 3.5S, 18W | 0-15 | <i>e</i> | 1.3 ± 0.28 | 0.81 ± 0.13 | 0.55 ± 0.09 |
| VS242 | 5S, 11W | 0-15 | 5.3 | 1.5 ± 0.48 | 0.81 ± 0.20 | 0.89 ± 0.17 |
| VS243 | 4.5S, 1.5W | 0-15 | 2.1 | 1.4 ± 0.40 | 0.81 ± 0.23 | 0.28 ± 0.15 |
| <i>Biased samples^f</i> | | | | | | |
| VB1 | 33.5N, 3.4W | 0-15 | 85 | 73 ± 5.0 | 1.2 ± 0.09 | 0.95 ± 0.13 |
| VB2 | 38.5N, 1W | 0-15 | 66 | 39 ± 3.3 | 1.1 ± 0.08 | 0.86 ± 0.15 |
| VB7 | S4, 41E | 0-15 | 32 | 22 ± 1.4 | 1.1 ± 0.07 | 0.84 ± 0.11 |

Table 3. (continued)

| Sample I.D. | Grid location ^b | Depth (cm) | Radionuclide concentration (pCi/g) ^a | | | |
|----------------|-------------------------------|---------------|---|-----------|-------------------|-------------------|
| | | | ²³⁸ U ^c | | ²²⁶ Ra | ²³² Th |
| | | | Field | Lab | | |
| VB17 | 27N, 19E | 0-15 | 33 | 22 ± 1.7 | 0.84 ± 0.07 | 0.54 ± 0.09 |
| VB18 | 19N, 15E | 0-15 | 15 | 11 ± 1.5 | 1.4 ± 0.09 | 1.0 ± 0.14 |
| VB19 | 17N, 14E | 0-15 | 13 | 9.0 ± 1.3 | 1.3 ± 0.08 | 0.97 ± 0.12 |

^aIndicated counting error is at the 95% confidence level ($\pm 2 \sigma$).

^bLocations are shown on Figs. 4 and 5.

^cField analyses provide a quick estimate of ²³⁸U concentrations for cleanup recommendations in the field and do not provide a counting error. Laboratory analyses provide the most accurate results. The samples for field analyses are from the same location as the samples analyzed at ORNL, but are not the same material. Discrepancies may be due to non-homogeneous contamination.

^dSystematic samples are collected without regard to gamma exposure rates.

^eSample concentration was not distinguishable from background.

^fBiased samples were collected from locations of previous anomalies.

INTERNAL DISTRIBUTION

- | | |
|--------------------|----------------------------------|
| 1. K. J. Brown | 15. R. E. Rodriguez |
| 2-4. R. F. Carrier | 16. M. S. Uziel |
| 5. R. D. Foley | 17. J. K. Williams |
| 6. R. C. Gosslee | 18. Central Research Library |
| 7. C. A. Johnson | 19-21. Laboratory Records |
| 8-9. M. E. Murray | 22. Laboratory Records - RC |
| 10. P. T. Owen | 23. ORNL Patent Section |
| 11-12. D. E. Rice | 24. ORNL Technical Library, Y-12 |
| 13. D. A. Roberts | 25-30. MAD Records Center |
| 14. R. E. Swaja | |

EXTERNAL DISTRIBUTION

31. D. G. Adler, Former Sites Restoration Division, Oak Ridge Field Office, U.S. Department of Energy, P.O. Box 2001, Oak Ridge, TN, 37831-8723
32. W. L. Beck, ORISE, E/ESD, 1299 Bethel Valley Road, Oak Ridge, TN 37831
33. J. J. Fiore, Director, Office of Eastern Area Programs, Office of Environmental Restoration, Cloverleaf Bldg. (EM-24) U.S. Department of Energy, 19901 Germantown Rd., Germantown, MD 20874-1290
34. FUSRAP Document Center, Science Applications International Corporation, P.O. Box 2501, 301 Laboratory Road, Oak Ridge, TN, 37831
35. Albert Johnson, Program Manager, Formerly Utilized Sites Remedial Action Program, U.S. Department of Energy, Cloverleaf Bldg., 19901 Germantown Rd., Germantown, MD 20874-1290
- 36-41. K. R. Kleinhans, Y-12 Site Health Physics Supervisor, MK-Ferguson of Oak Ridge Co., P.O. Box 2011, Bldg. 9703-15, Oak Ridge, TN 37831-2100
42. L. K. Price, Director, Former Sites Restoration Division, Oak Ridge Field Office, U.S. Department of Energy, P.O. Box 2001, Oak Ridge, TN 37831-8723
43. Jack Russell, 12850 Middlebrook Road, Suite 210, Germantown, MD 20874
44. A. G. Toddings, FUSRAP Project Administrator Bechtel National, Inc., FUSRAP Department, Oak Ridge Corporate Center, 151 Lafayette Drive, P. O. Box 350, Oak Ridge, TN 37831-0350
- 45-47. W. Alexander Williams, Designation and Certification Manager, Division of Off-Site Programs, Office of Eastern Area Programs, Office of Environmental Restoration, Cloverleaf Bldg. (EM-421), U.S. Department of Energy, 19901 Germantown Rd., Germantown, MD 20874-1290
- 48-49. Office of Assistant Manager, Energy Research and Development, DOE Oak Ridge Operations, P.O. Box 2001, Oak Ridge, TN 37831-8600
- 50-52. Office of Scientific and Technical Information, DOE, P.O. Box 62, Oak Ridge, TN 37831

